

THE ALL-NEW 2006

MITSUBISHI ECLIPSE



SOME CALL IT SHOWING OFF.

YOU CALL IT YOUR COMMUTE.

Equipped with a slick-shifting six-speed manual transmission and driven by an endless appetite for asphalt, the all-new Mitsubishi Eclipse is designed to turn your daily drive into an adrenaline-pumping performance. It's not your fault if everyone else wants to watch.



THE AUTOMOTIVE EQUIVALENT TO WASHBOARD ABS.

The Mitsubishi Eclipse GT is the embodiment of power and aggression.
With its muscular frame, customized aero kit and 18-inch low-profile tires,
the Eclipse is one intense sports coupe you don't want to make angry.



263 HORSEPOWER

260 LB-FT OF TORQUE

MULTI-PROFILE CAMSHAFTS

HOLD ON. TIGHT.



FIRE EXIT
←

ECLIPSE GT V8

MSA263



GIVE EVERYONE AN EARFUL OF WHAT THEY'RE MISSING.

650 watts of peak power amplifying through nine speakers, including a 10-inch subwoofer, Digital Signal Processing and the PUNCH[®] bass environment, would be high standards for a well-designed home audio system. Rockford Fosgate[®] felt they were just right for the Mitsubishi Eclipse.



THOSE AREN'T YOUR TIRES SQUEALING.
IT'S THE ROAD SCREAMING "UNCLE."

When it comes to corners, the Eclipse GT calls the shots. Supported by the Eclipse's sport-tuned, fully independent suspension, four-wheel anti-lock disc brakes, traction control and 18-inch low-profile tires, you'll have complete control over the road.



RELAX, NOBODY IS CHASING YOU.
THEY ALL GAVE UP A LONG TIME AGO.

You look in your rearview mirror and see nothing. Get used to it.
The Mitsubishi Eclipse was built to help you break away from the pack of pretenders.



THE ALL-NEW 2006

MITSUBISHI ECLIPSE

DETAILS & SPECS



263 HORSEPOWER
260 LB-FT OF TORQUE




The Eclipse's available V6 engine can be mated to either our newly developed 5-speed Sportronic[®] transmission or a slick-shifting 6-speed manual. For smooth operation of the 6-speed, first through third gears have triple-cone synchronization to help provide precise shift strokes and quick access to the Eclipse's breakaway speed.



Valve Lift


As shown below, Eclipse engines generate remarkably flat torque curves (power bands), yielding 90% of their available torque under 3000 rpm. Translation: You don't have to floor it to experience the Eclipse's true power.

We've enhanced the Eclipse's ferocious 3.8L V6 engine with Mitsubishi Innovative Valve timing and lift Electronic Control (MIVEC) to provide maximum engine performance and efficiency over a broad range of speeds. The end result is an adrenaline-pumping power plant that dishes out 263hp and 260 lb-ft of torque. MIVEC technology also helps to increase fuel efficiency while decreasing emissions.


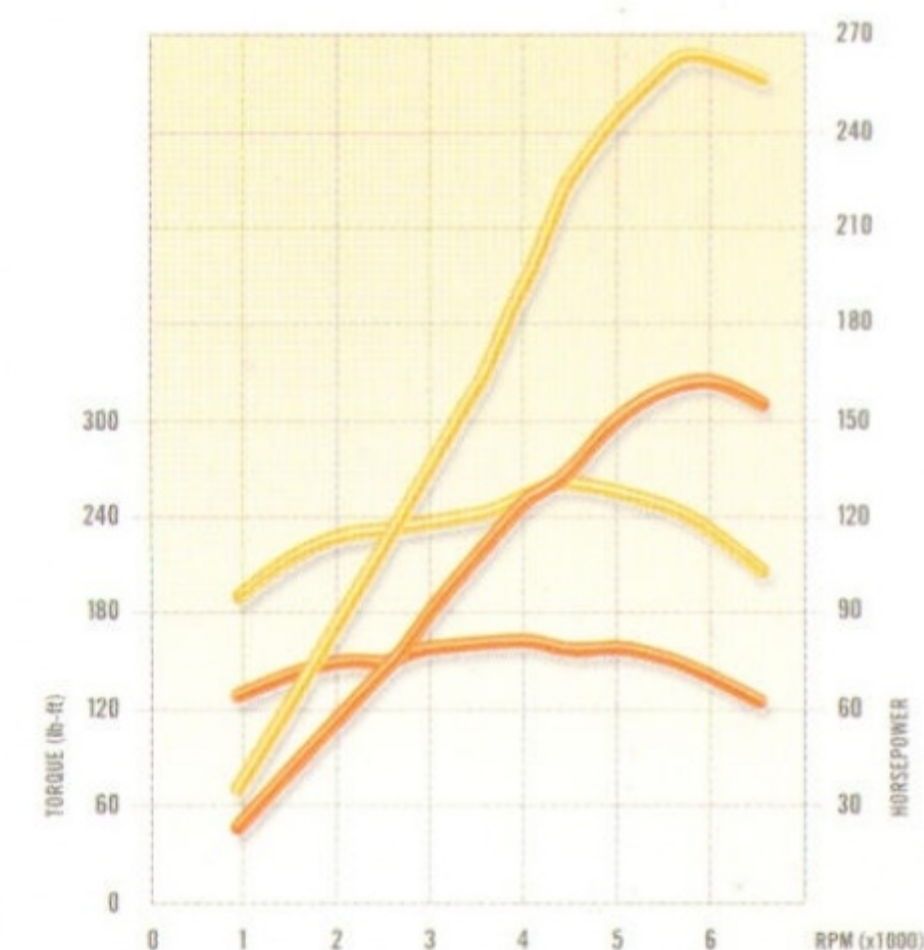


SPORT-TUNED SUSPENSION

To harness its power, we've fitted the Eclipse with a sport-tuned, 4-wheel independent suspension. Equipped with large-diameter MacPherson struts up front and a low-mount multi-link setup with coil-over gas shocks in the rear, the Eclipse suspension works continuously to shield you from bumps and to help keep the wheels glued to the road. In addition, the Eclipse comes with four-wheel anti-lock disc brakes, as well as a front strut-tower brace and traction control for the GT.

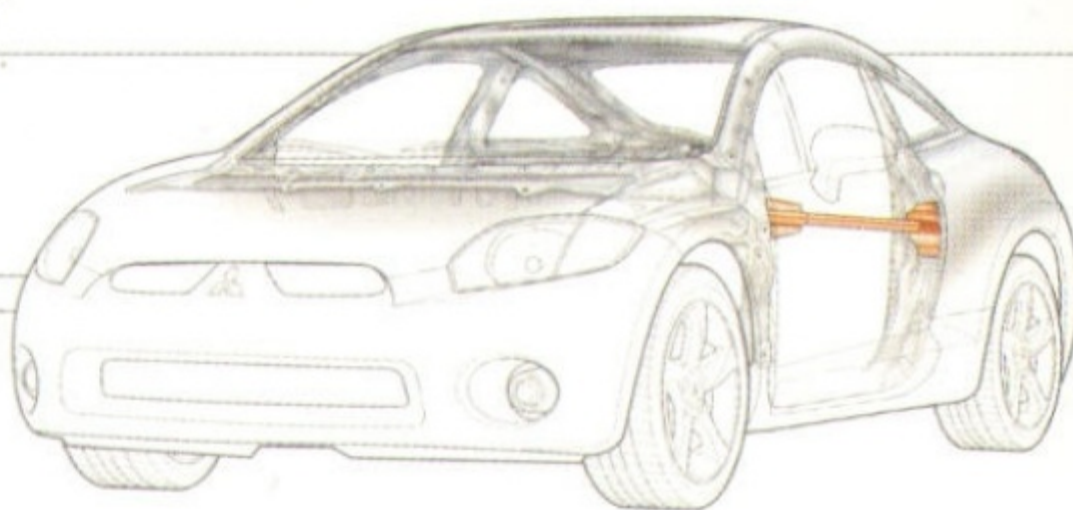

The Eclipse's sturdy suspension coupled with its rigid chassis make for a more fluid ride and agile handling. The reinforced-steel unibody chassis also helps to provide additional security for you and your passengers. Packed with several standard safety features such as front seat-mounted side-impact air bags,¹ advanced front air bags,¹ side-curtain air bags,¹ front and rear crumple zones and steel side-guard door beams, the Eclipse does its best to steer you clear of harm's way.

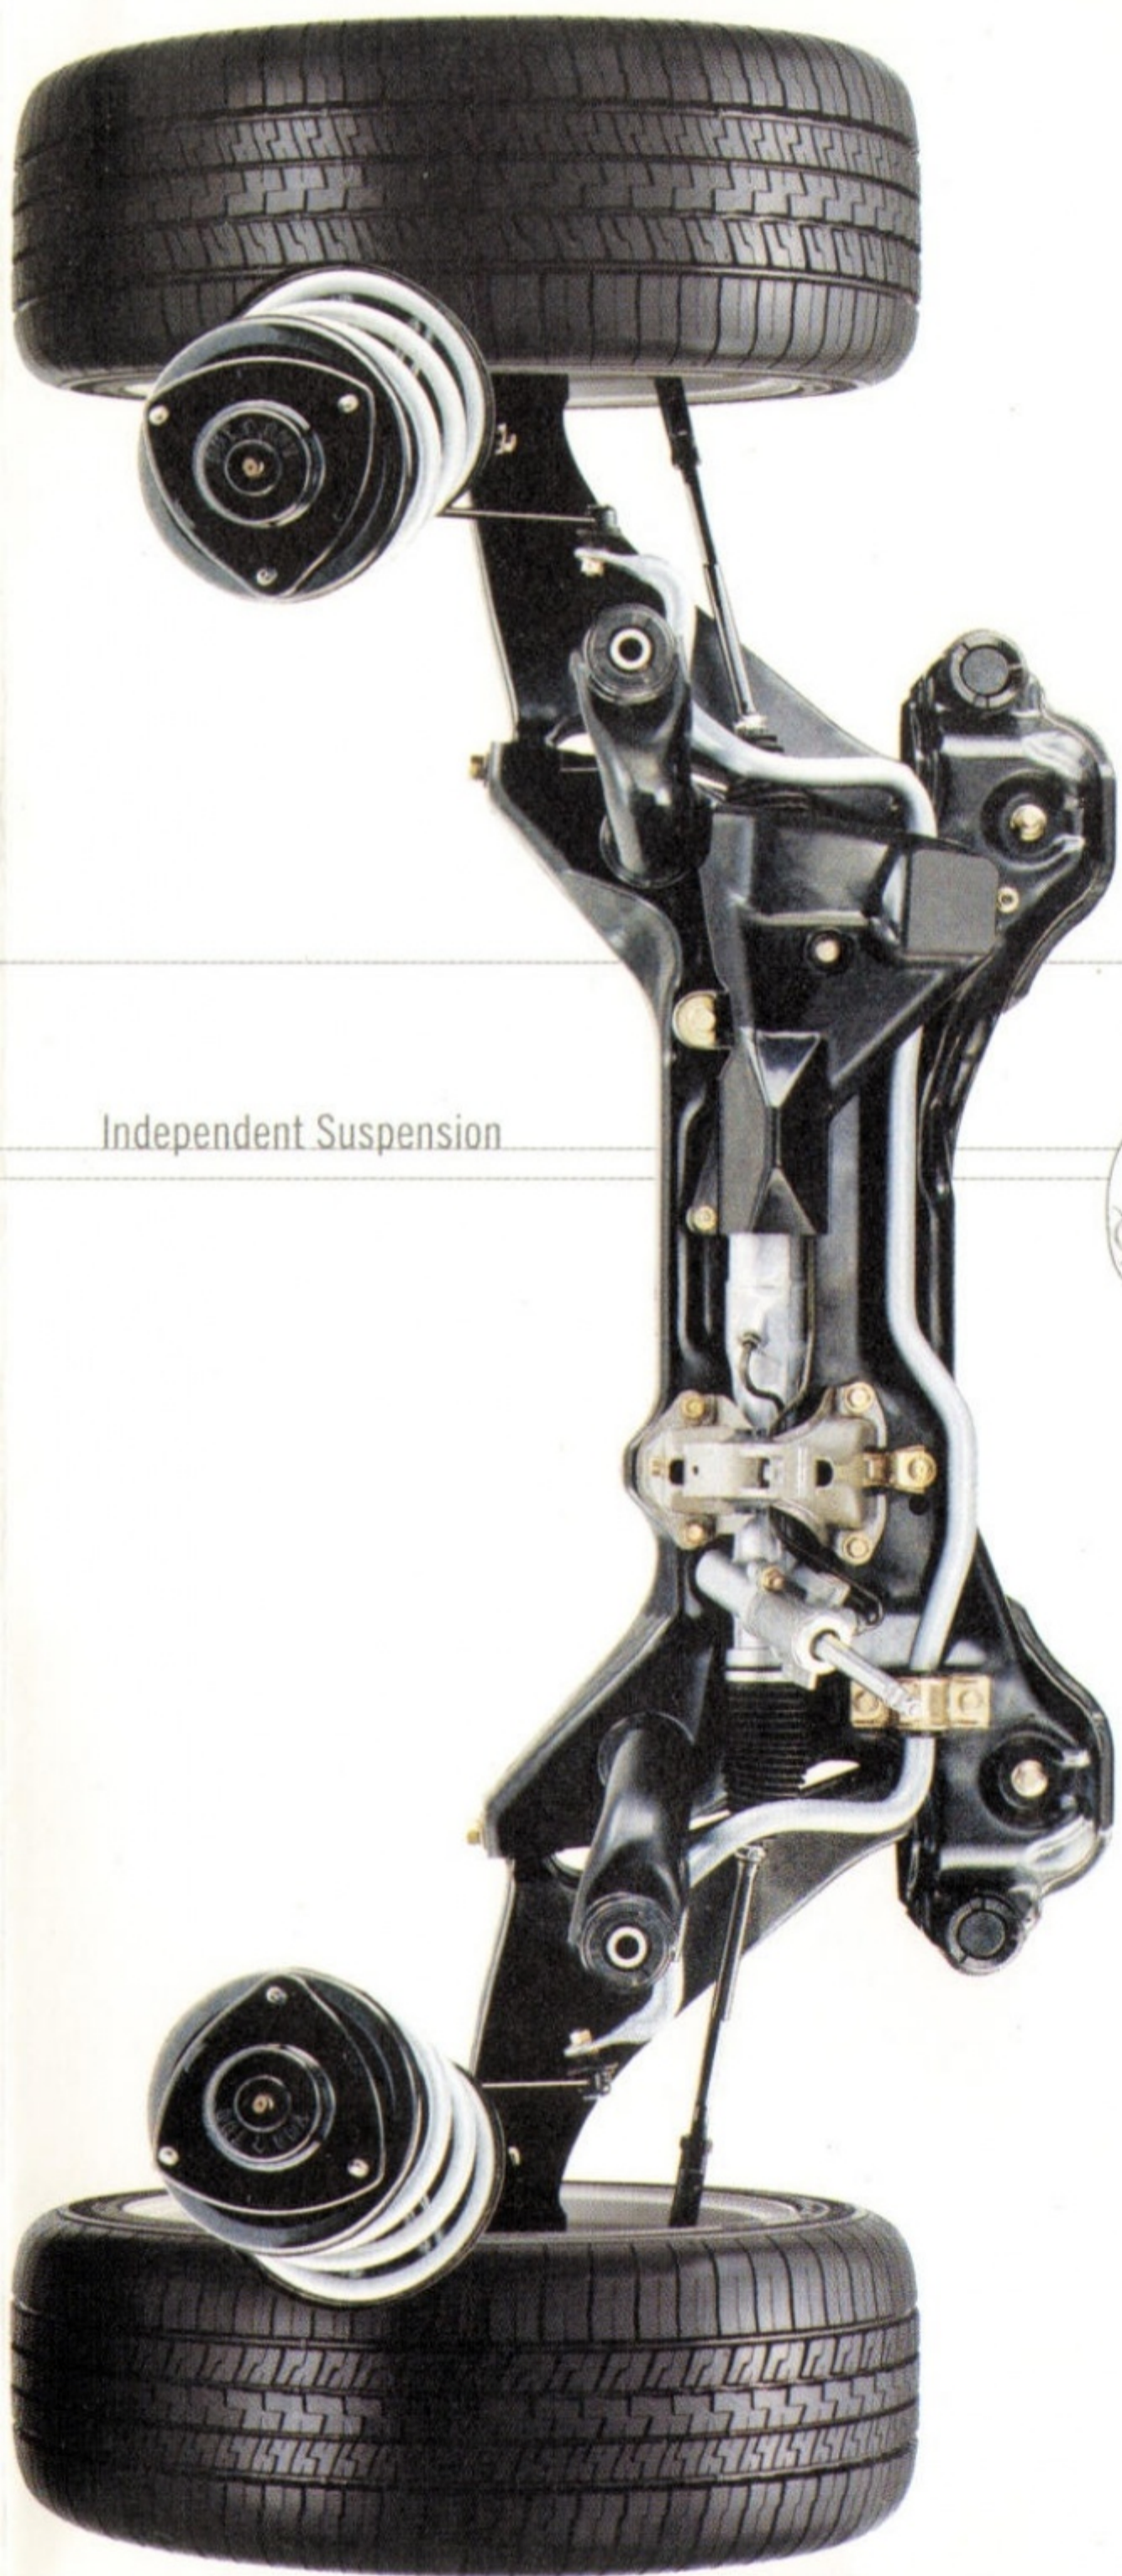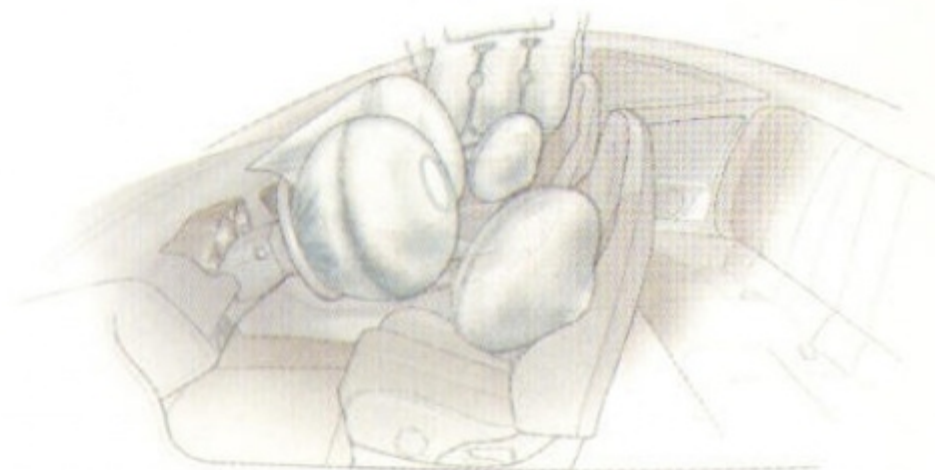

Independent Suspension




10" Subwoofer

650-WATT ROCKFORD FOSGATE®

The available Rockford Fosgate audio system developed specifically for the Eclipse has enough wattage to shake up a small city, not to mention the few fortunate occupants sitting inside. This powerful 650-watt (max.) system comes complete with a 6-disc in-dash CD changer, MP3 playback capability and Digital Signal Processing (DSP). With DSP, you can set the perfect-listening "sweet spot" using simple-to-adjust staging controls, musical-genre equalization and personal settings. Now every song track you play will come in loud and clear, at least to those living within a four-block radius.

Inside, the Rockford Fosgate system surrounds you with nine speakers, including a massive subwoofer in back to deliver crystal-clear sound. The 10-inch unit is located in the cargo area and is housed in a sonically neutral enclosure. It offers six levels of Rockford Fosgate's famous PUNCH® to choose from, and pumps out bass that could challenge most high-end home audio systems.




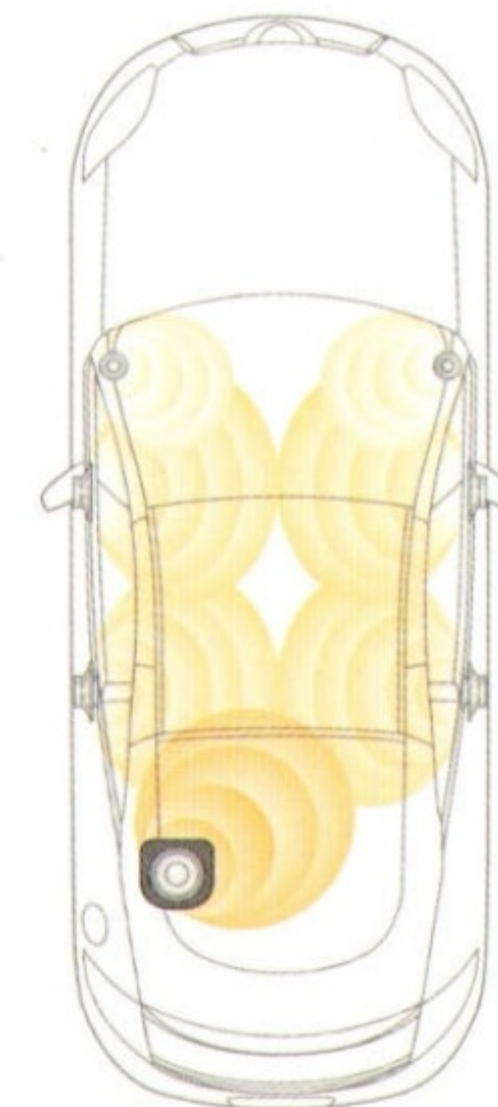




Once inside the cockpit, the Eclipse becomes an extension of you. The sport-bucket seat cradles you in comfort as the ice-blue LED instrumentation illuminates the motorcycle-inspired gauges before your eyes.



You discover the steering wheel and door levers have been contoured to your touch and every control switch on the dash panel is located right where you want it. You turn the key, hit the gas and instantly, you and the road connect.

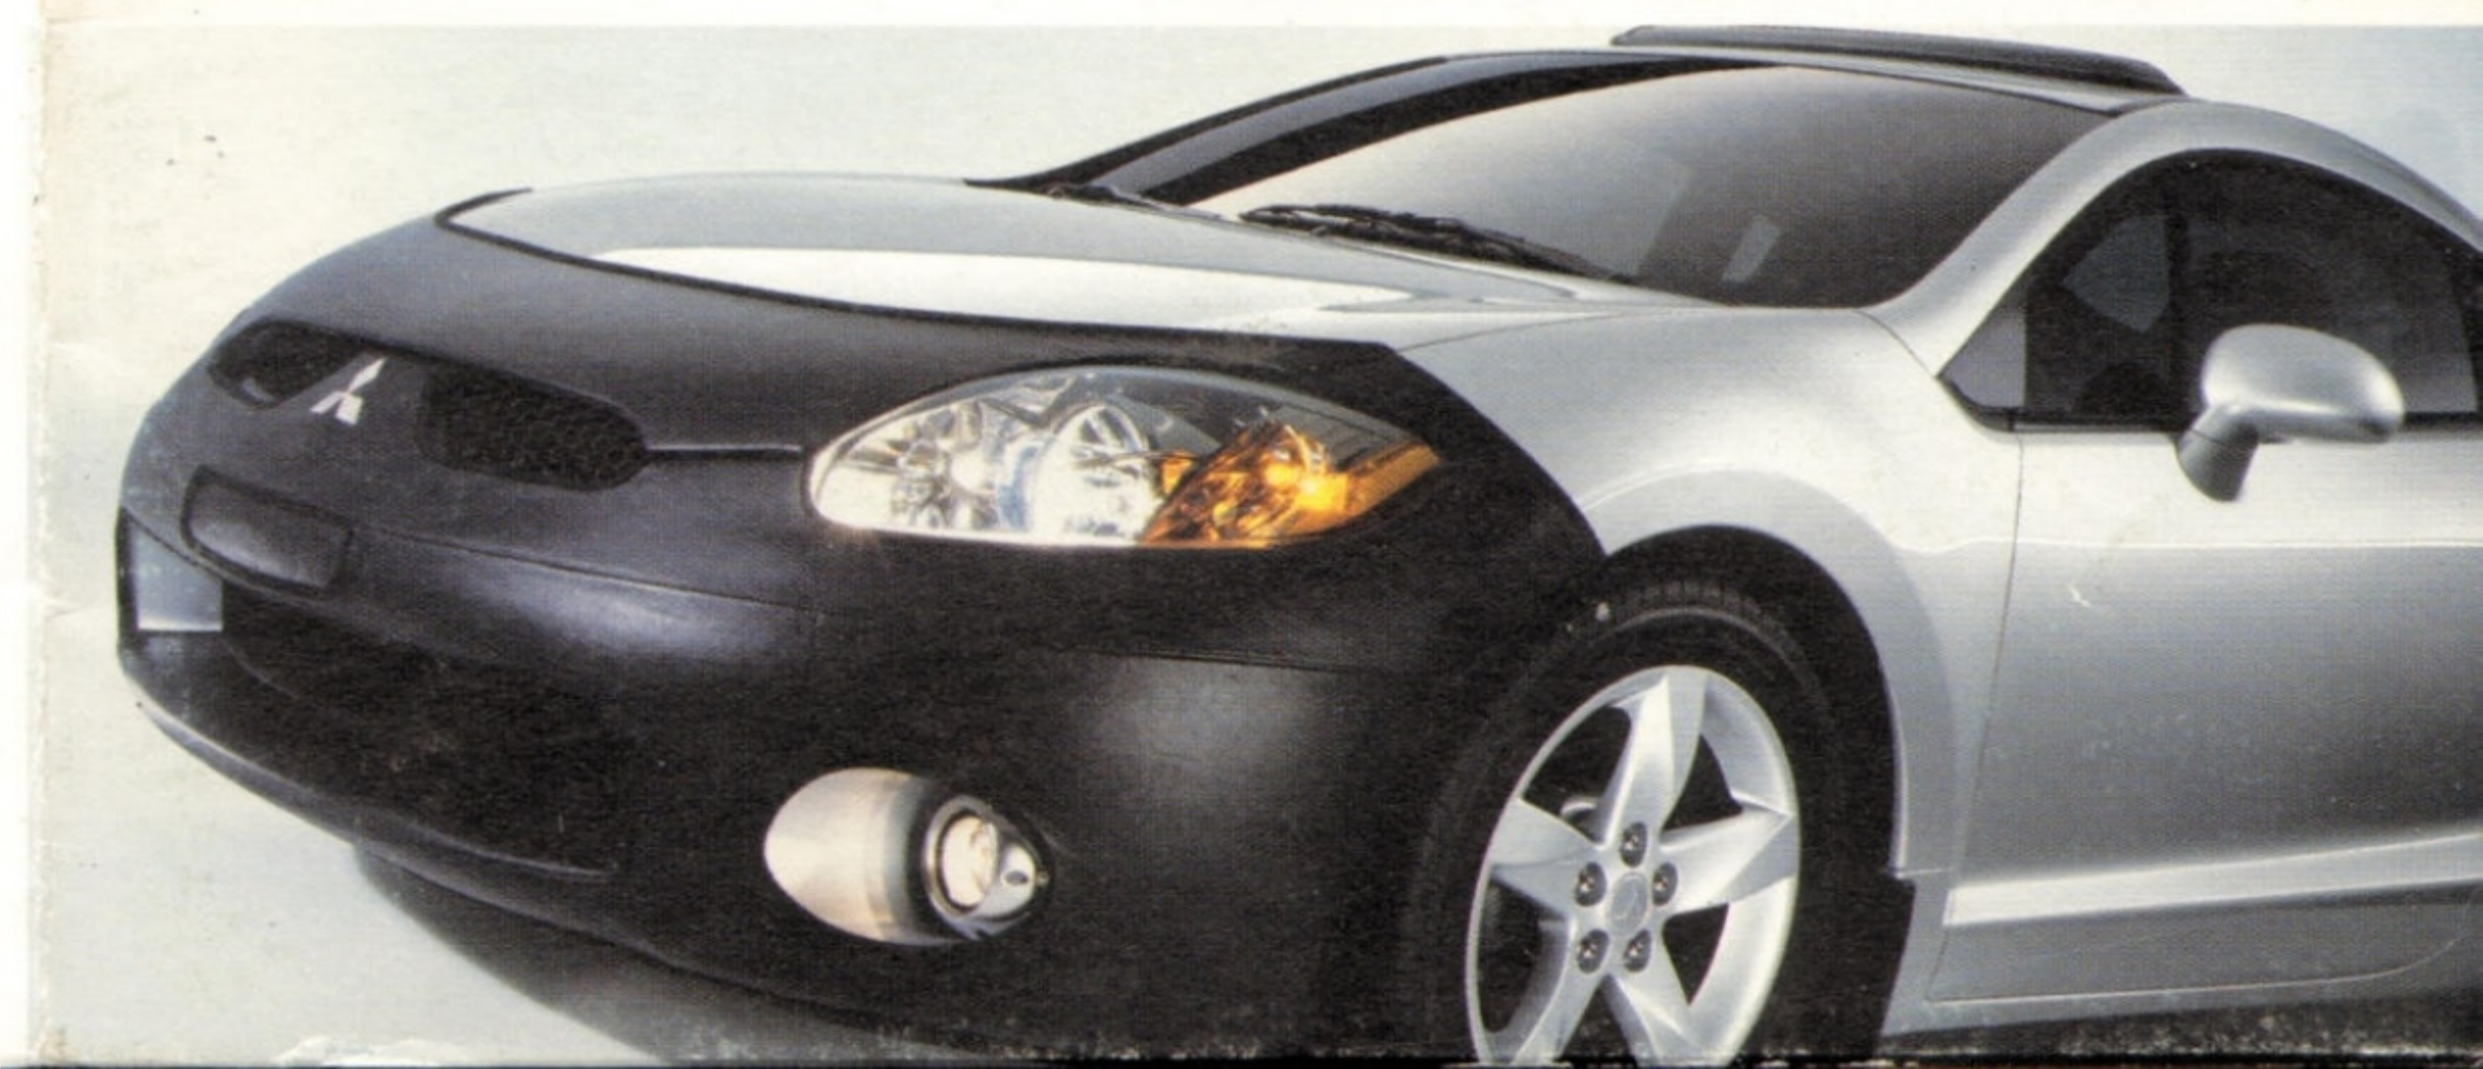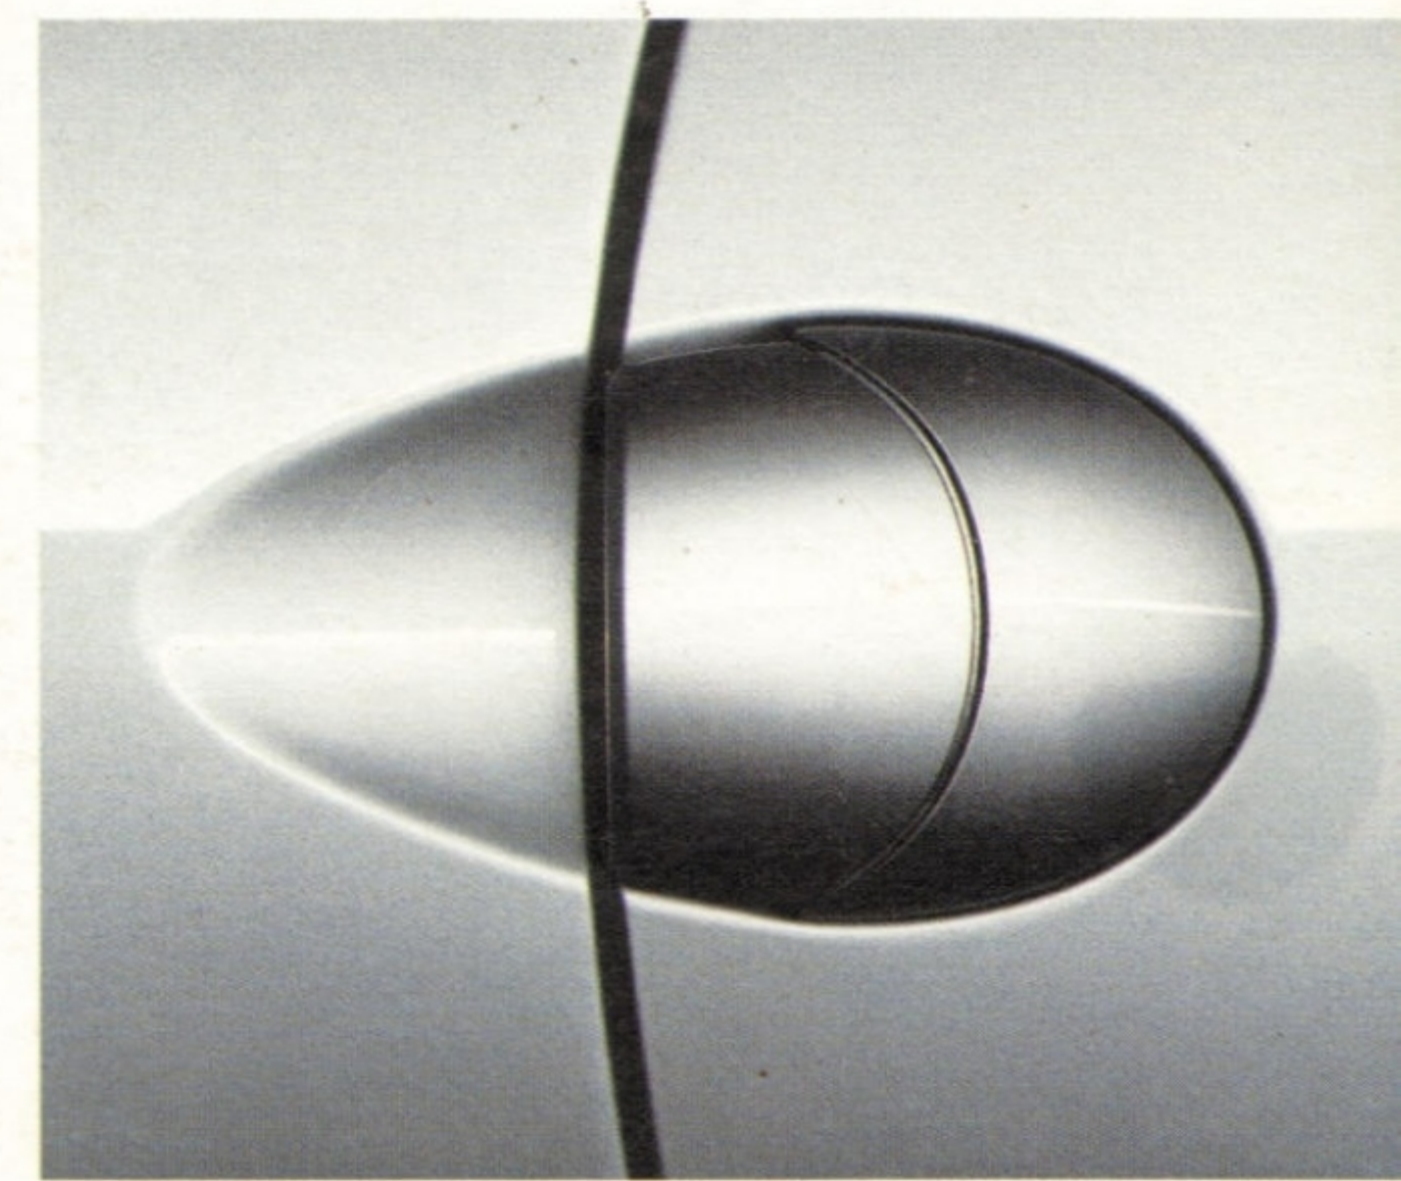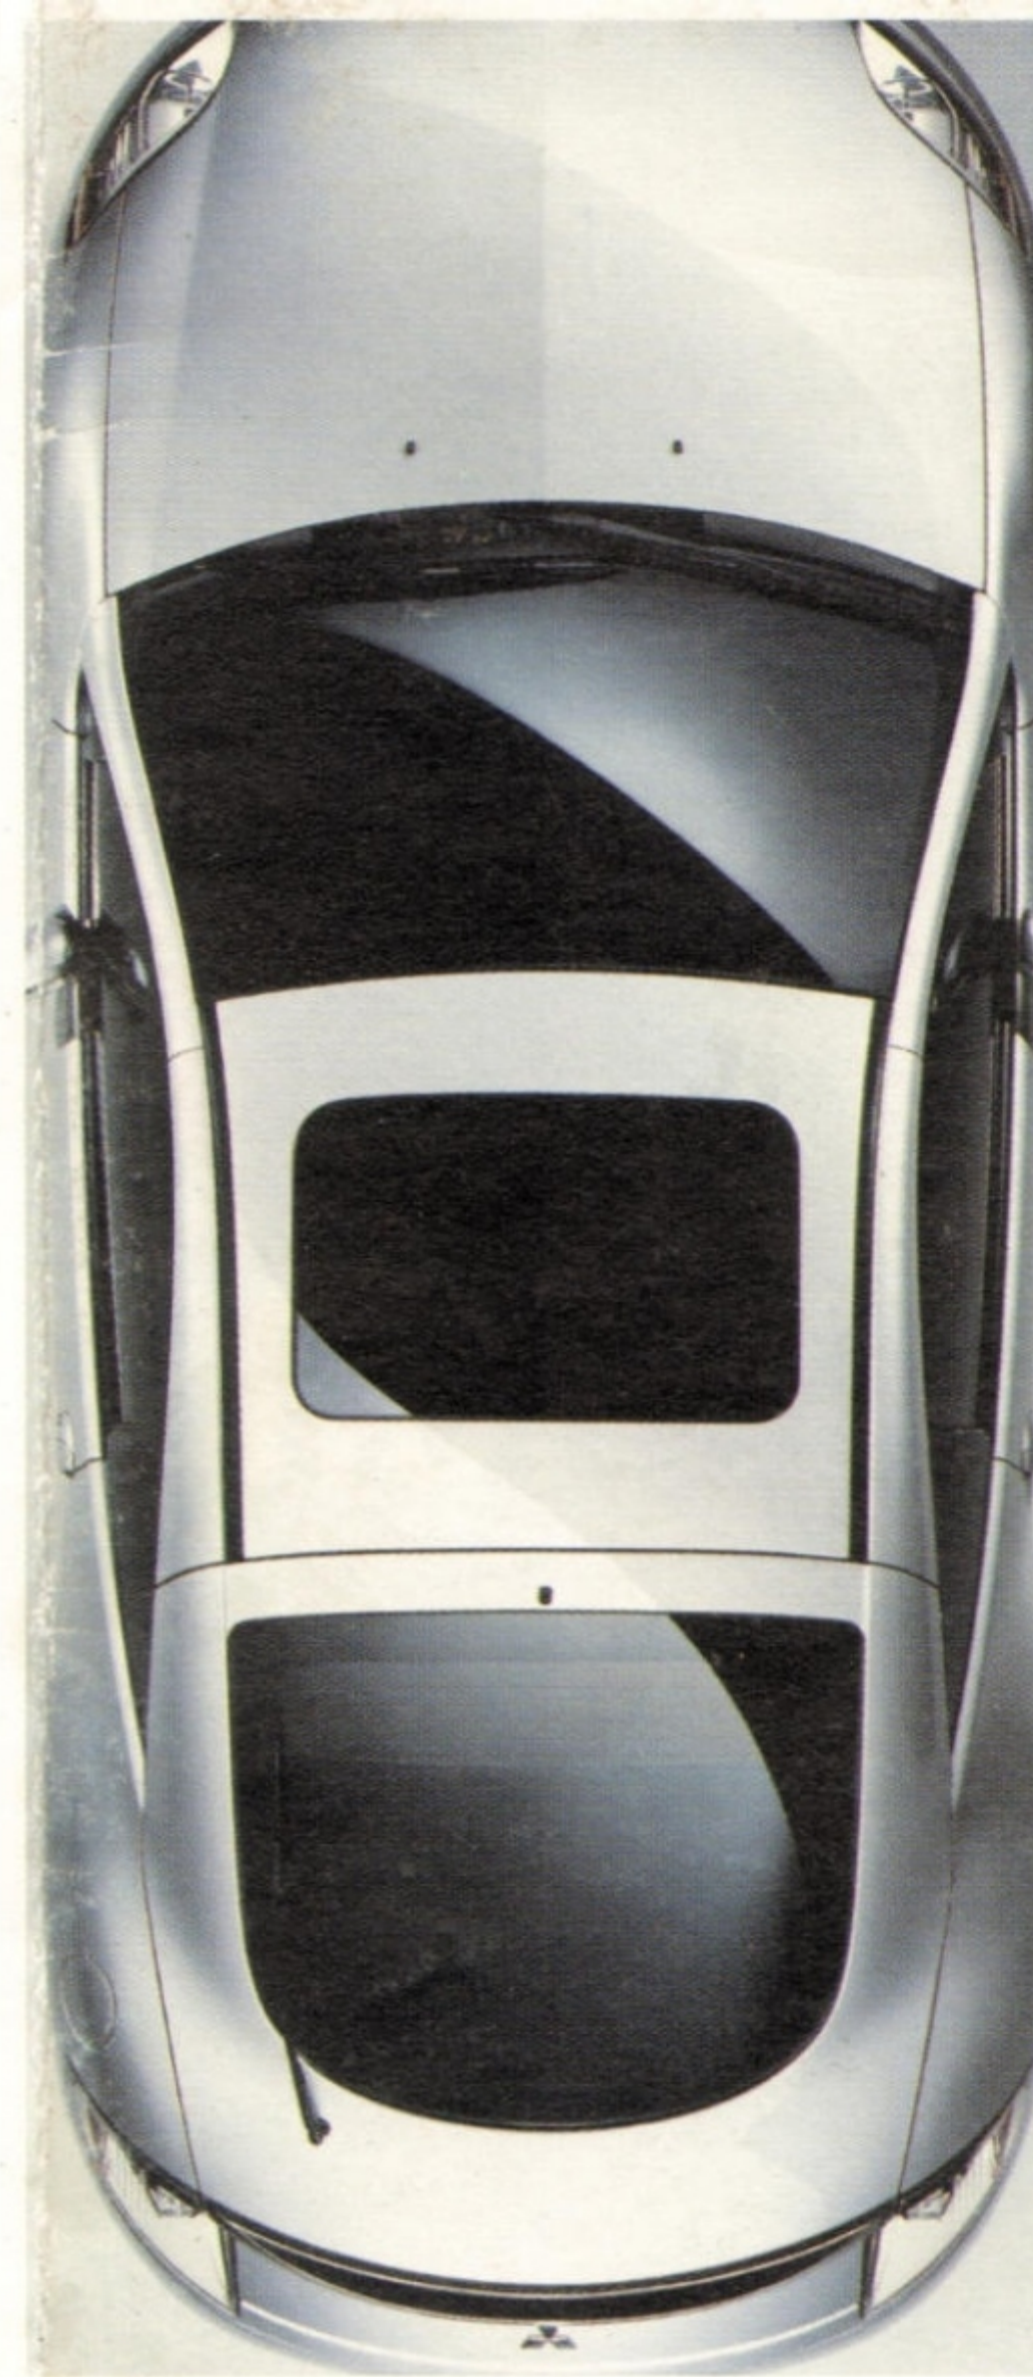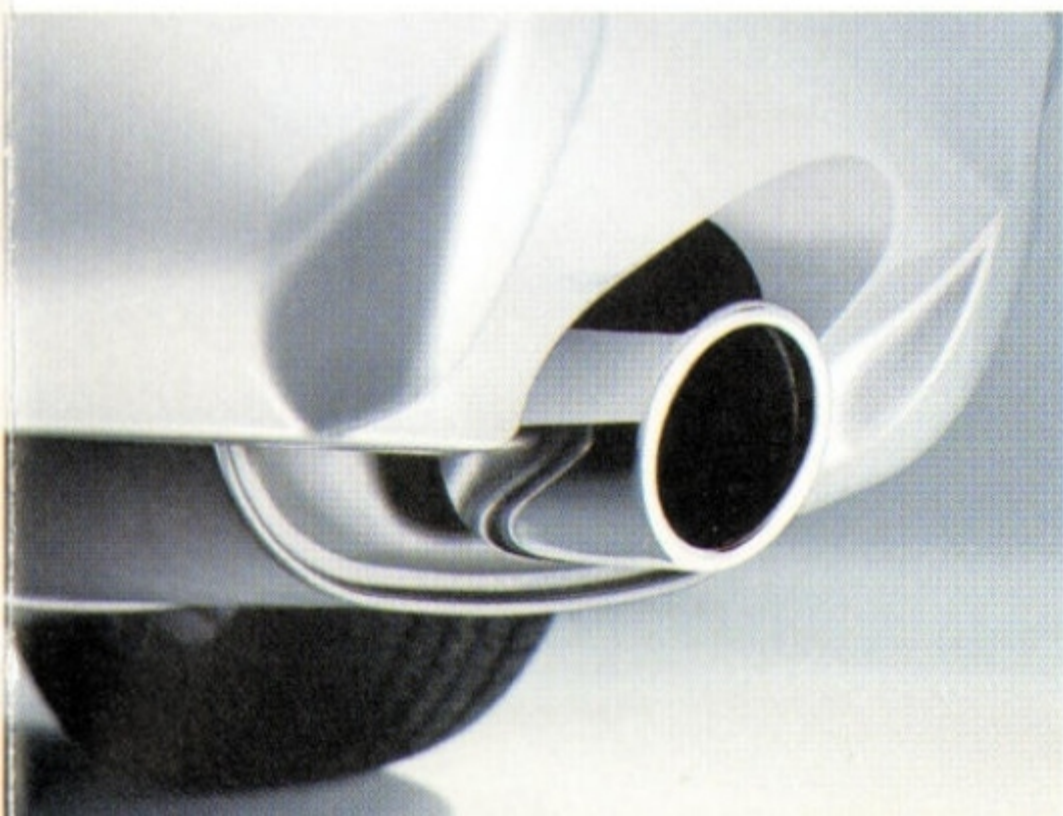



With its muscular exterior, aggressive stance and numerous power enhancements, this fourth-generation Eclipse just begs to be driven. The Eclipse has always pushed the automotive envelopes of performance and style, and the all-new 2006 model is certainly no exception. One look at the Mitsubishi Eclipse in action, and you'll understand why it has been the best-selling import sports coupe over the last 15 years, according to R.L. Polk data.



The Eclipse's 2.4-liter, 4-cylinder and 3.8-liter V6 engines provide strong off-the-line acceleration and instantaneous passing power. Combined with a corner-hugging sport-tuned suspension, customized aero kit and available 18-inch low-profile tires, the fast lane is now yours for the taking.



Eclipse GT shown with optional equipment and Accessory Aero Kit.



2006 ECLIPSE DETAILS & SPECS



	GS	GT
POWERTRAIN		
2.4L SOHC, 16-valve MIVEC, 4-cylinder inline engine	•	–
Torque lb-ft @ 4000 rpm	162	–
Horsepower hp @ 6000 rpm	162	–
Displacement cc	2378	–
Compression ratio (x:1)	9.5	–
Redline (rpm)	6500	–
3.8L SOHC, 24-valve MIVEC V6 engine	–	•
Torque lb-ft @ 4500 rpm	–	260
Horsepower hp @ 5750 rpm	–	263
Displacement cc	–	3828
Compression ratio (x:1)	–	10.5
Redline (rpm)	–	6500
Two-stage air-intake system	–	•
5-speed manual transmission or	•	–
Sportronic [®] sequential-shift 4-speed automatic transmission	•	–
6-speed manual transmission or	–	•
Sportronic sequential-shift 5-speed automatic transmission	–	•
CHASSIS & SUSPENSION		
Front independent MacPherson strut suspension	•	•
Front anti-sway bar (mm dia.)	22	22
Front strut-tower brace	–	•
Rear independent low-mount multi-link suspension	•	•
Rear anti-sway bar (mm dia.)	20	21
Ventilated disc brakes (in., dia., front/rear)	11.6/–	11.6/11.2
Rear solid disc brakes (in., dia.)	10.3	–

SECURITY

	GS	GT
3-point safety belts for all seating positions	•	•
Height-adjustable front shoulder-belt anchors	•	•
Pre-tensioners and force limiters for front safety belts	•	•
Front advanced SRS air bags ¹ with two-stage inflators	•	•
Front seat-mounted side-impact air bags ¹	•	•
Side-impact roof-mounted curtain air bags ¹	•	•
Lower and upper anchors for child safety seats	•	•
Impact-protected fuel tank	•	•
Tubular steel side-guard door beams	•	•
Theft-detering engine immobilizer	•	•

TECHNICAL DATA

Wheelbase (in.)	101.4
Length (in.)	179.7
Width (in.)	72.2
Height (in., 17" wheels/18" wheels)	53.5/53.8
Track (in., front/rear)	61.8/61.8
Headroom (in., front/rear), [with sunroof]	38.5/34.6 [37.5/34.6]
Shoulder room (in., front/rear)	54.2/51.2
Legroom (in., front/rear)	42.8/29.2
Passenger volume (cu ft, without sunroof/with sunroof)	81.6/80.2
Cargo volume (cu ft)	15.7
Fuel tank capacity (gal.)	17.7
Est. fuel use ² manual GS (mpg, city/highway)	23/30
Est. fuel use ² auto GS (mpg, city/highway)	23/29
Est. fuel use ² manual GT (mpg, city/highway)	18/27
Est. fuel use ² auto GT (mpg, city/highway)	19/28
Curb weight GS (lb, manual/auto)	3274/3307
Curb weight GT (lb, manual/auto)	3472/3538
Warranty, Basic New Vehicle Limited (years/miles)	5/60,000
Warranty, Powertrain Limited (years/miles)	10/100,000
Warranty, Anti-Corrosion Limited (years/miles)	7/100,000

OPTION PACKAGES

SUN & SOUND PACKAGE FOR GS: One-touch power sunroof • Center display for time, audio, exterior temperature and compass • Electrochromic auto-dimming rearview mirror • 650-watt (max.) Rockford Fosgate 6-CD/MP3 audio system with 9 speakers including rear-mounted 10" subwoofer, PUNCH Audio Dynamics and steering wheel-mounted audio controls

PREMIUM SPORT PACKAGE FOR GT: One-touch power sunroof • Electrochromic auto-dimming rearview mirror • 650-watt (max.) Rockford Fosgate 6-CD/MP3 audio system with 9 speakers incl. rear-mounted 10" subwoofer, PUNCH Audio Dynamics and steering wheel-mounted audio controls • Automatic climate control • Leather-surfaced front seats • Heated front seats • Power-adjustable driver's seat • Aluminum pedals • 18" x 8" seven-spoke alloy wheels

4-wheel anti-lock braking system (ABS) + Electronic Brakeforce Distribution	•	•
Traction control (with dash-mounted ON/OFF)	–	•
17" x 7.5" five-spoke alloy wheels (P225/50)	•	•
18" x 8.0" seven-spoke alloy wheels (P235/45)	–	P

COMFORT & CONVENIENCE

140W (max.) Mitsubishi CD (MP3 playback) audio system with 6 speakers	•	•
650W (max.) Rockford Fosgate [®] 6-CD/MP3 audio system with 9 speakers incl. rear-mounted 10" subwoofer, PUNCH [®] Audio Dynamics and steering wheel-mounted audio controls	P	P
Rear in-glass antenna	•	•
6-way adjustable highback front seats with integrated head restraint	•	•
8-way adjustable (6-way power) driver's seat	–	P
Heated front seats	–	P
50/50 split fold-down rear seatback	•	•
Leather-surfaced front seats	–	P
Power windows + driver's side auto-down	•	•
Automatic self-sealing window mechanism	•	•
Power door locks	•	•
Manual air conditioning	•	•
Automatic climate control	–	P
Height-adjustable steering column	•	•
Cruise control	•	•
Illuminated visor mirrors, left and right	•	•
Electrochromic auto-dimming rearview mirror	P	P
Map lights + delayed auto-off feature	•	•
Center LCD display for time and audio	•	–
Center LCD display for time, audio, compass and external temperature	P	•

EXTERIOR


Halogen headlights with auto-off feature	•	•
Integrated fog lights	A	•
2-speed variable intermittent windshield wipers + washers	•	•
Intermittent rear-window wiper + washer	•	•
One-touch power sunroof	P	P
Power-adjustable sideview mirrors	•	•
Heated sideview mirrors	–	P
Alloy fuel door	A	A
Rear spoiler	•	•
Polished stainless-steel exhaust tip	A	•
Rear window defroster	•	•
LED tail lights and brake lights	•	•
Keyless entry	•	•
Aero kit (front, rear and side ground effects) ⁴	A	A

• = STANDARD P = OPTIONAL EQUIPMENT PACKAGE A = ACCESSORY – = NOT AVAILABLE

EXTERIOR COLORS




Sunset Pearlescent

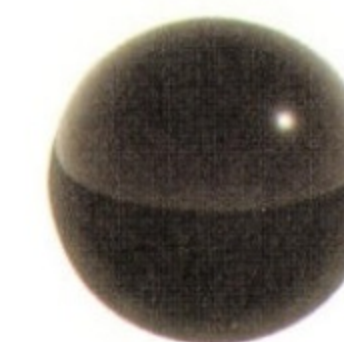


Kalapana Black



Pure Red



Liquid Silver Metallic




Ultra Red Pearl



UV Blue Pearl



Frost White Pearl

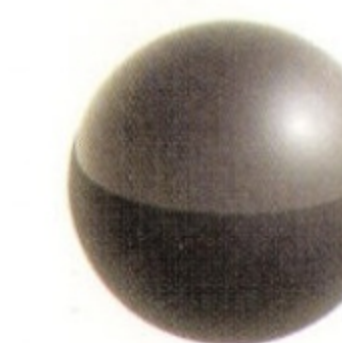

Titanium Pearl

BEST BACKED CARS IN THE WORLD™

- 10-YEAR/100,000-Mile Powertrain Limited Warranty
- 5-YEAR/60,000-Mile New Vehicle Limited Warranty
- 7-YEAR/100,000-Mile Anti-Corrosion/Perforation Limited Warranty
- 5-YEAR/Unlimited-Miles Roadside Assistance

At Mitsubishi, we are so confident in the quality, reliability and durability of the cars we build that we back all our 2006 models with one of the finest new-vehicle protection packages available to North American car buyers.³ So now, when you drive off in your new Mitsubishi, you'll know you can enjoy it to the fullest for many years to come.

Please see your Mitsubishi Dealer or visit mitsubishicars.com for full details on all Mitsubishi Limited Warranties, Roadside Assistance programs and other after-sale customer benefits.

MITSUBISHI GENUINE ACCESSORIES

Aero kit (front, rear and side ground effects) ⁴	Sunroof wind deflector ⁴
Mudguards ⁴	Wheel locks
Alloy fuel door	Cargo mat (with and without subwoofer)
Car cover	Cargo net
Fog lights (GS only)	Cargo organizer
License plate frame	Floor mats (All-weather and Sport)
Nosemask	Smoker's kit
Polished stainless steel exhaust tip (GS only)	

If added at time of purchase, accessories will be installed and, in most cases, will be covered by the New Vehicle Limited Warranty.

Technical data, features, options and other equipment shown and listed are based on the latest information available at time of printing.
¹Air bags can cause serious injury or death to anyone too close to an air bag when it deploys. To decrease the risk of injury from a deploying air bag, all occupants must be properly restrained and seated well back, upright and in the middle of the seat. Do not lean against the door. Always place children 12 and under in the rear seat and use appropriate child restraints. Never place a rear-facing infant restraint in the front seat. See your Owner's Manual and instructions provided with your child restraint for more information.
²EPA fuel-use estimate to be used as a standardized comparison with other vehicles. Your mileage may vary depending on driving style and environmental conditions. ³Based on OEM information for 2005 U.S.-sold vehicles. ⁴Late availability

1-888-MITSU2006

mitsubishicars.com

