




## nuulu

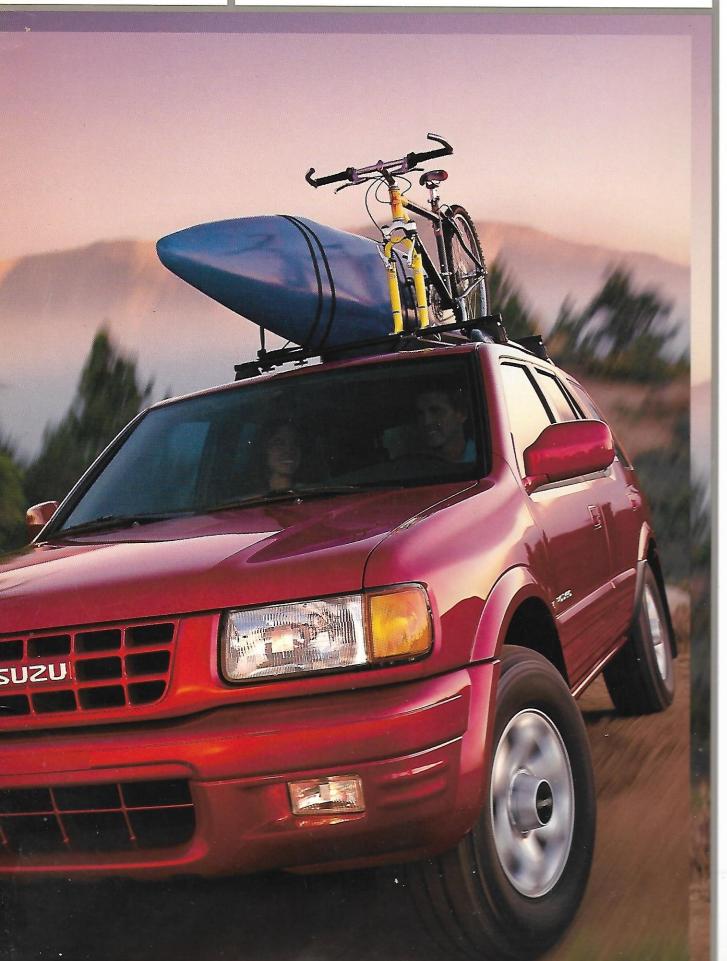


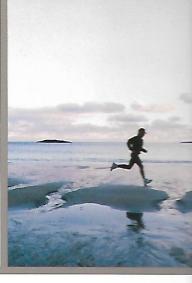

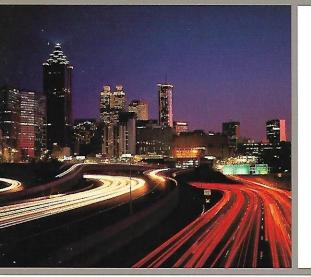


## 

## FOR CARS

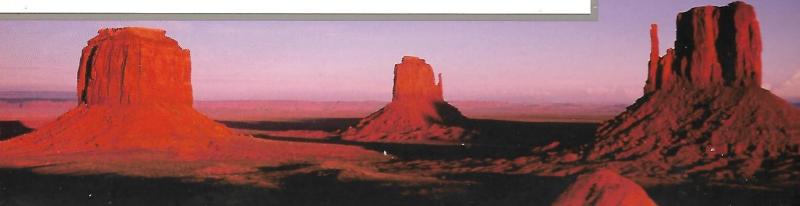





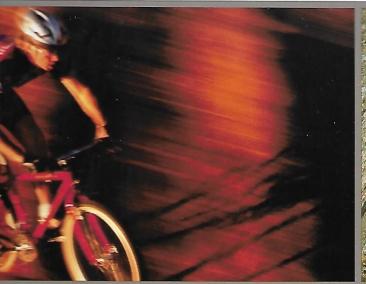





Since you're reading this brochure, you probably already know this: Life just doesn't fit in a car. There are too many things to do (riding, rafting, the Ironman). Too many places to go (Moab, the Yukon, Alpes d'Huez). Too much stuff to take with you (bikes, packs, coolers). That's why we don't build cars. We build rugged SUVs like the Rodeo (twice winner of the Alcan Winter Rally). Vehicles you can put big stuff in. Vehicles you can do big things in. Vehicles made for a big world. Vehicles only an SUV specialist could build.









Engineered to go the distance

**GO FARTHER** 

Why do we support the Eco-Challenge as well as the Ironman and Escape From Alcatraz triathlons? For the same reason Isuzu vehicles are driven to the point of destruction in Death Valley, or engines are run on the test bench for 960 hours straight: We have a passion for endurance.

If five years of engineering and more than

O hours of bench testing, Rodeo's 205-hp V6

is ready to get you around town (or out of town) in a few

Dual-overhead-cam technology

amshafts to drive 4-valve-per-cylinder heads.

e fine-finished, low-friction cams in the V6 aid

acker acceleration. And the cross-flow heads

by the cylinders in each engine to inhale and

hale more freely for more complete combustion.





## High-output 3.2-liter V6

At its heart: a computer-controlled variable induction system which adjusts air intake to boost output at all engine speeds. The result: instant power at any time, thanks to a robust torque curve peaking at 214 lb-ft. To save weight and shed heat, virtually the entire engine is constructed of aluminum alloy. Except for the ultralight magnesium valve covers, that is.

ER.





Get confident anti-lock braking—even when you're in 4-wheel drive, in conditions when you might need it most. Because unlike the systems on many SUVs, Rodeo's standard anti-lock brakes work on all four wheels, in all drive modes.



Now take it with confidence—and assistance from Rodeo's tight steering, ground-hugging suspension and 4-wheel AF



## Rack & pinion steering

It's a steering system similar to that used on most sports cars. Because it communicates accurately, responds acutely and tracks smoothly. With power-assist, parking's no problem, either.

## Five-link rear suspension

A sophisticated multi-link coil-spring design helps hold each rear tire to the road for tighter handling, with five links controlling wheel movement. It augments an independent double-wishbone suspension, which provides precision control for the front wheels.









## er 81 cubic feet of gear can fit into Rodeo's spacious nere's plenty of space for a 4-man raft crew, plus oarsman hold virtually any cup

## Split folding rear seats

r and souvenirs don't always fit in the Luse Rodeo's 60/40 split rear seats arry oversize baggage and still have sating for rear passengers. Both seat





cargo? Rodeo gi
two options. The
hatch opens sep
for reach-in acce
the lower door is
balanced for one
opening, swings
left so you can lo
the curb and has
netted pocket ins
secure your supp

## In-dash CD player

Load the tracks for your entire trip directly into the dash with an optional 6-disc CD player.

Just feed discs one by
one into the single slot
instead of a stack in the
back. And you don't have
to remove an entire cartridge
to swap a single disc.

cargo area.

There are even cup holders that (Hey, we tested 50 of them.)


## Extra power outlets

Use the one in the dash to plug in a cell phone without removing the lighter. And the one in the cargo area (on LS and LSE) to power compressors or other accessories




## Power moonroof

The available moonroof uses smokinglass to let in the sun without the higher retracts electronically. And has a sli

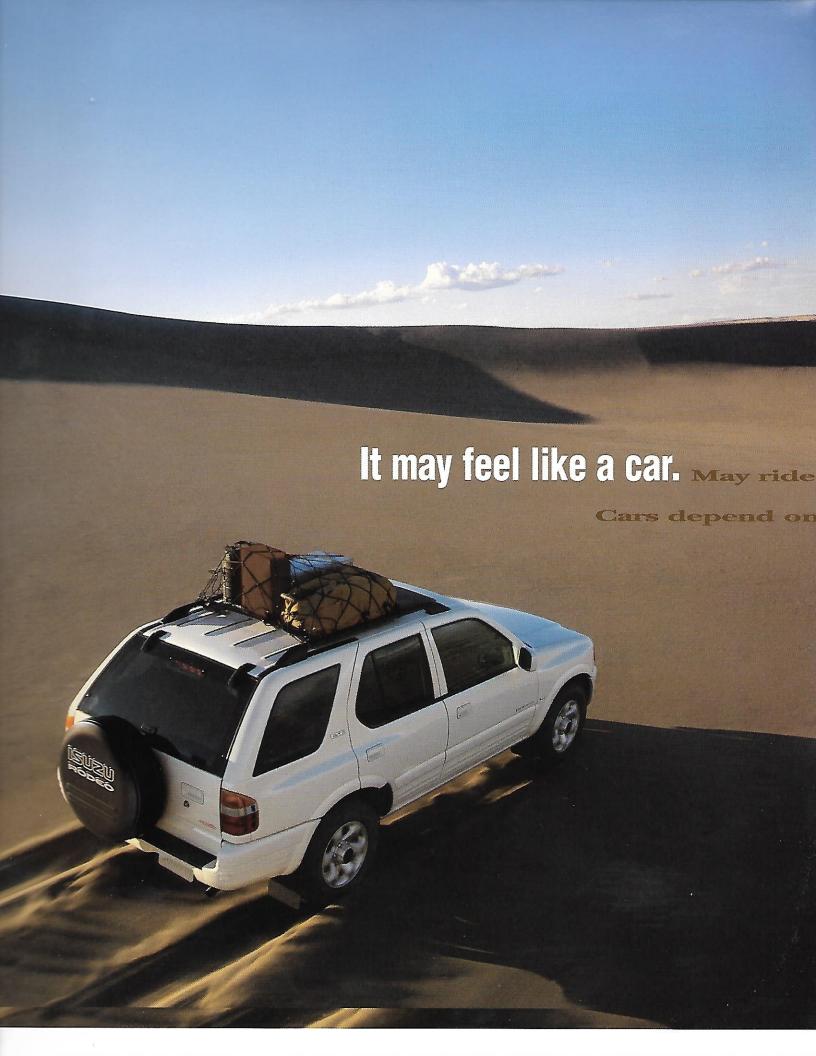

## PAVEMENT OPTIONAL.

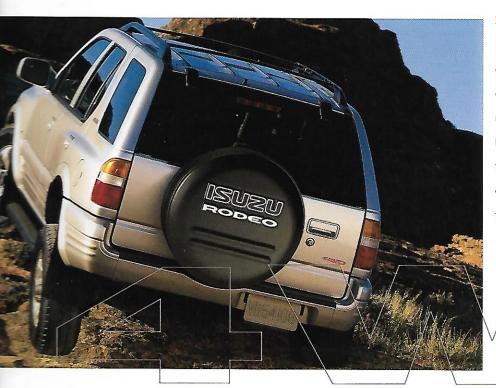

## Limited-slip rear differential

If a full 7.9 inches of wheel travel isn't enough to keep all four on the ground, you can still grip rough trails with a limited-slip rear differential. It's standard on all 4WD Rodeos. And gives you surer traction through rocks, ruts, loose dirt and slick conditions by sensing slippage and shifting torque to the rear wheel with greater grip.

h like a car. But Cars require asphalt.

roads and highway funding. Which is one reason

## Rodeo is definitely not a car.


## The Eco-Challenge

Untamed backcountry. Intense technical challenges. Grueling tests of endurance. It's a nonstop, 300-mile exploration of the limits of performance, demanding the same commitment we put into proving the Rodeo.



### Push-button 4WD

Go most anywhere, at any moment, with electronic shifton-the-fly 4-wheel drive. It lets you shift into 4WD High at up to 60 mph via a button on the dash. One touch equalizes power distribution between the front and rear axles, instantly giving you 4-wheel traction.



Feel free to head where the highway doesn't.










## **Outward visibility**

Rodeo's athletic design isn't just easy to look at—it's easy to see out of. Each pillar was carefully shaped to maximize glass area and improve sight lines, for better outward vision.

## Structural safety

It starts with a sturdier ladder frame, using eight crossmembers and box-section rails (versus cheaper open-sided designs).

Cray® supercomputers helped reduce weight while increasing rigidity. And integrated body panels add the stiffness of a unibody-type design (with energy-absorbing structures front and rear).

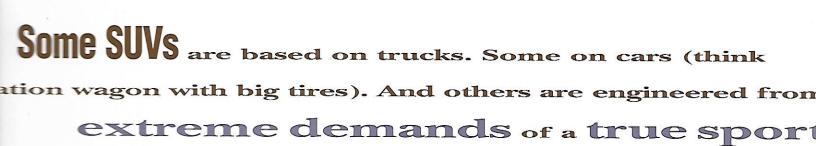


## Dynamic cab mounts

design, innovative energy-absorbing dy-to-frame mounts help isolate the from vibration on rough roads. And collision, deflect impact energy from cabin, to be absorbed by the frame.



High-mounted air vents

## **AVOID EXCUSES.**

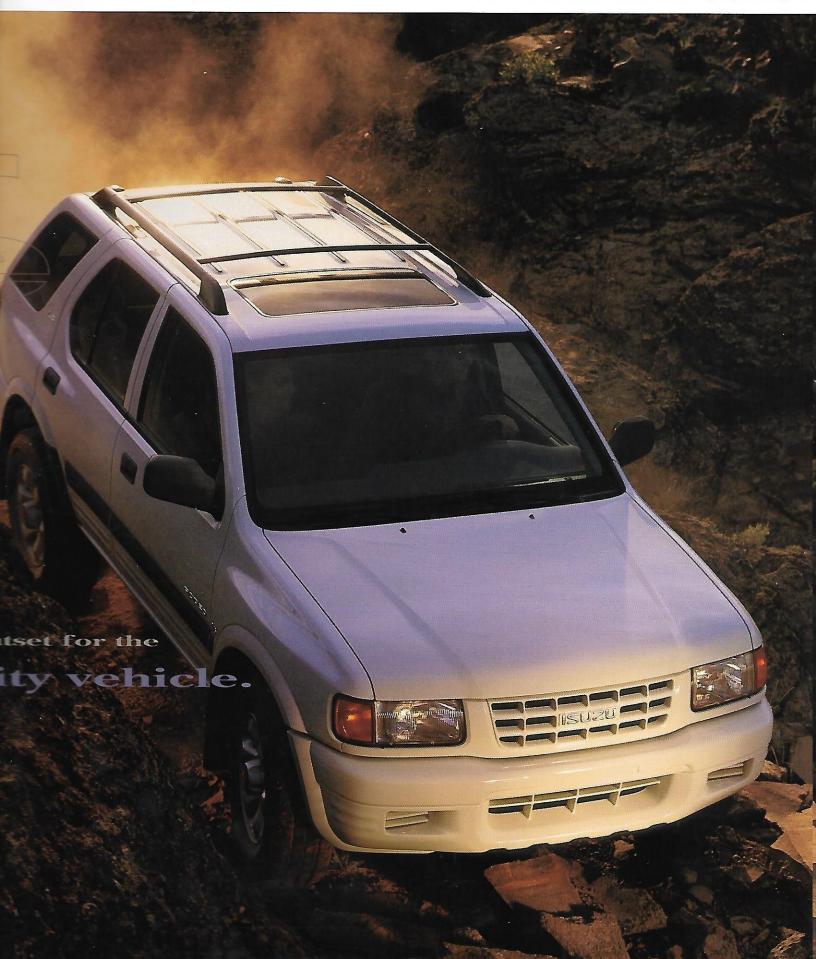

| & Security                                      | S 4-Cylinder | S V6 2WD | S V6 4WD | LS 2WD | LS 4WD | LSE 2WD | LSE 4WD |
|---|--------------|----------|----------|--------|--------|---------|---------|
| skid plate and radiator skid plate              | S            | S        | S        | S      | S      | S       | S       |
| ase and 4WD actuator skid plate                 |              |          | S        |        | S      |         | S       |
| d rear differential                             | _            |          | S        |        | S      |         | S       |
| front passenger air bags¹                       | S            | S        | S        | S      | S      | S       | S       |
| nt and rear outboard seat belts with adjustable | S            | S        | S        | S      | S      | S       | S       |
| d door beams                                    | S            | S        | S        | S      | S      | S       | S       |
| reiar door locks                                | S            | S        | S        | S      | S      | S       | S       |
| or locks  |              |          |          | S      | S      | S       | S       |
| eyless entry/alarm                              |              |          |          | S      | S      | S       | S       |
| outside mirrors with defoggers                  |              |          | _        | S      | S      | S       | S       |
| rearview mirror .                               | S            | S        | S        | S      | S      | S       | S       |
| members windshield wipers with mist wipe        | S            | S        | S        | _      |        | -       |         |
| wade intermittent windshield wipers             | _            |          |          | S      | S      | S       | S       |
| t rear window wiper/washer                      | S            | S        | S        | S      | S      | S       | S       |
| ser window defrosters                           | S            | S        | S        | S      | S      | S       | S       |

| ior                                  | S 4-Cylinder | S V6 2WD | S V6 4WD | LS 2WD | LS 4WD | LSE 2WD | LSE 4WD |
|--------------------------------------|--------------|----------|----------|--------|--------|---------|---------|
| ed bumpers                           |              |          | -        | S      | S      | S       | S       |
| ed external mirrors and door handles |              |          |          |        |        | S       | S       |
| counted spare tire with cover        | 0            | 0        | 0        | 0      | 0      | 0       | S       |
| steel wheels                         | S            | S        | S        | S      |        |         |         |
| e aluminum-alloy wheels              |              | _        |          | 0      | S      | S       |         |
| a aluminum-alloy wheels              |              |          |          | 0      | 0      | 0       | S       |
| window privacy glass                 |              | _        |          |        |        | S       | S       |
| ed glass                             | S            | S        | S        | S      | S      | S       | S       |
| ack with adjustable crossbars        | P            | Р        | Р        | S      | S      | S       | S       |
| up/slide tinted glass moonroof       |              |          |          | 0      | 0      | S       | S       |
|                                      |              |          |          | _      |        | S       | S       |

| or & Seating                       | S 4-Cylinder | S V6 2WD | S V6 4WD | LS 2WD | LS 4WD | LSE 2WD | LSE 4WD |
|------------------------------------|--------------|----------|----------|--------|--------|---------|---------|
| fort bucket seats                  | S            | S        | S        | S      | S      | S       | S       |
| folding rear bench seat            | S            | S        | S        | S      | S      | S       | S       |
| cloth upholstery                   | S            | S        | S        |        |        |         |         |
| elour cloth upholstery             | _            | _        |          | S      | S      | _       |         |
| nmed seating surfaces              |              |          |          |        |        | S       | S       |
| or carpeting                       | S            | S        | S        | S      | S      | S       | S       |
| our mats                           | 0            | 0        | 0        | S      | S      | S       | S       |
| assist grips and pargo hooks       | S            | S        | S        | S      | S      | S       | S       |
| renience net and retractable cover | 0            | 0        | 0        | S      | S      | S       | S       |

|   | The State of the S |          | 9        |        | 0      | 9       | 0       |
|---|--|----------|----------|--------|--------|---------|---------|
| ort & Convenience   | S 4-Cylinder   | S V6 2WD | S V6 4WD | LS 2WD | LS 4WD | LSE 2WD | LSE 4WD |
| oning with CFC-free refrigerant                               | Р  | Р        | Р        | S      | S      | S       | S       |
| and with tap-up/down and cancel                               | _  |          |          | S      | S      | S       | S       |
| wheel (leather-wrapped on LSE)                                | _  | S        | S        | S      | S      | S       | S       |
| tows with driver's one-touch express-down                     | _  | _        |          | S      | S      | S       | S       |
| MFW stereolcassette player with 4 speakers                    | S  | S        | S        | _      |        | _       |         |
| remium AM/FM stereo/cassette<br>6 speakers                    |  | _        | _        | S      | S      | S       | S       |
| player  | _  | _        |          | 0      | 0      | 0       | 0       |
| isc CD player   | _  | _        |          | 0      | 0      | 0       | 0       |
| scile with CD/cassette<br>d dual cup holders                  | S  | S        | S        | S      | S      | S       | S       |
| isor vanity minor (dual willumination on LSE)                 | S  | S        | S        | S      | S      | S       | S       |
| cargo-area lights   | S  | S        | S        | S      | S      | S       | S       |
| esy lights  | _  | _        | _        | S      | S      | S       | S       |
| ghts  |  | _        |          | _      | _      | S       | S       |
| nperature and fuel gauges, trip<br>and low-fuel warning light | S  | S        | S        | S      | S      | S       | S       |





Spruce Green Mica (S, LS, LSE)



Ebony Black (S, LS, LSE)



Bright Silver Metallic (S, LS, LSE)



Cream White (S, LS, LSE)



Radiant Red (S)



Zephyr Green Mica (S)





| e  | S 4-Cylinder   | S V6 2WD   | S V6 4MD   | LS/LSE 2WD  | LS/LSE 4WD   |  |  |  |
|--|--|--|--|---|--|--|--|--|
| on   | 2.2-liter inline four  | 3.2-iter V6  |  |   |  |  |  |  |
| der head construction  | Cast iron/aluminum alloy   | Aluminum alloy/aluminum alloy  |  |   |  |  |  |  |
|  | Dual overhead<br>camshaft 16-valve   | Dual overhead camels   | aft 24-valve   |   |  |  |  |  |
|  | Sequential multi-point f   | fuel injection   |  |   |  |  |  |  |
| dem  | Direct ignition  | Direct ignition with coil  | over plug  |   |  |  |  |  |
| spower/torque SAE net  | 130 hp @ 5200 rpm/   | 205 hp @ 5400 rpm/   |  |   |  |  |  |  |
|  | 144 lb-ft @ 4000 rpm   | 214 lb-ft @ 3000 rpm   |  |   |  |  |  |  |
| on ratio   | 9.6.1  | 9.1:1  |  |   |  |  |  |  |
| rain   | 0.40 Feder   | 01/00/0  | 20.  |   |  |  |  |  |
| ive system   | S 4-Cylinder   | S V6 2WD   | S V6 4WD   | LS/LSE 2WD  | LS/LSE 4WD   |  |  |  |
| ne system  |  |  | Part-time with 2-speed<br>transfer case & push-          |   | Part-time with 2-speed transfer case & push-                 |  |  |  |
| manipular (NIII and OC)  | Faces I Was a la   |  | button 4WD-HI activation                                 |   | button 4WD-HI activation                                     |  |  |  |
| namission (N/A on LSE)<br>transmission (optional on  | 5-speed with overdrive   |  |  |   |  |  |  |  |
| S VE 4WD, LS V6 2WD, standard on LSE models  |  |  | d 4-speed with overdrive,<br>winter start mode and ac    |   |  |  |  |  |
| (N/A on LSE)   |  | 1st: 3.77, 2nd: 2.25, 3rd<br>5th: 0.81, Rev.: 3.87   | d: 1.40, 4th: 1.00,                                      |   |  |  |  |  |
| automatic  | =  | 1st: 2.86, 2nd: 1.62, 3r   | d: 1.00, 4th: 0.72, Rev.: 2.                             | 00  |  |  |  |  |
| (1) front/rear   | /4.55  | -/4.30   | 4.30/4.30  | /4.30   | 4.30/4.30  |  |  |  |
| se ratios (:1)   |  |  | 1.00 high/2.05 low                                       |   | 1.00 high/2.05 low   |  |  |  |
|  |  |  |  |   | *****  |  |  |  |
| is & Suspension  |  | S V6 2WD   | S V6 4WD   | LS/LSE 2WD  | LS/LSE 4WD   |  |  |  |
|  | Box-section ladder-type  |  |  |   |  |  |  |  |
| troni<br>rear  | Independent double-wis 5-link with coil springs, s   | hbone, A-shaped lower ar<br>stabilizer bar and gas-pre   | rm, torsion bar springs with<br>ssurized shock absorbers | stabilizer bar and gas-pre  | essurized shock absorbers                                    |  |  |  |
| system   |  |  | with audible front-pad we                                |   |  |  |  |  |
| iguration front  | 11.0" ventilated disc  |  | 11.0" ventilated disc                                    | 11.0" ventilated disc   | 11.0" ventilated disc  |  |  |  |
| rear   |  |  | 12.3" ventilated disc                                    | 11,6" drum  | 12.3" ventilated disc  |  |  |  |
| etandard   | Variable power-assisted  | rack and pinion  |  | lan uluman kan  |  |  |  |  |
| standard   | 0.0 00 % [5] Steel   |  |  | 6.5 JJ × 15" steel (LS)<br>6.5 JJ × 15" aluminum<br>(LSE, optional on LS) | 6.5 JJ × 15" aluminum (LS)<br>7 JJ × 16" aluminum<br>(LSE)   |  |  |  |
| optional   |  |  |  | 7 JJ × 16" aluminum   | 7 JJ × 16" aluminum (LS)                                     |  |  |  |
| standard   | mud & snow all-season<br>P235/75R15  |  |  |   | mud & snow all-season<br>P235/75R15 (LS)<br>P245/70R16 (LSE) |  |  |  |
| optional   |  |  |  | mud & snow all-season   | mud & snow all-season  |  |  |  |
|  |  |  |  | P245/70R16  | P245/70R16 (LS)  |  |  |  |
| t & Capacities   | S 4-Cylinder   | S V6 2WD   | S V6 4WD   | LS/LSE 2WD  | LS/LSE 4WD   |  |  |  |
| 1  | 3495 lb  | 3589 lb  | 3860 lb  | 3651 lb   | 3926 lb  |  |  |  |
| acity <sup>2</sup>   | 2500 lb  | 4500 lb  | 000010   | COOT ID   | 0320 (0  |  |  |  |
|  | 21.1 gal   | Paragraph of the state of the s |  |   |  |  |  |  |
|  | The state of the s |  |  |   |  |  |  |  |
| stimated   |  |  |  |   |  |  |  |  |
| conomy <sup>1</sup>  | S 4-Cylinder   | S V6 2WD   | S V6 4WD   | LS/LSE 2WD  | LS/LSE 4WD   |  |  |  |
| ay mileage   | 21/24 mpg  | 18/20 mpg (16/20 mpg   | with automatic)  |   |  |  |  |  |
| or Dimensions  | S 4-Cylinder   | S V6 2WD   | S V6 4WD   | LS/LSE 2WD  | LS/LSE 4WD   |  |  |  |
| front/rear w/o sunroof<br>w/sunroof  |  |  |  | 38.9/38.3 in  |  |  |  |  |
| front/rear   |  |  |  | 37.8/37.9 in  |  |  |  |  |
| front/rear   |  |  |  |   |  |  |  |  |
| front/rear   |  |  |  |   |  |  |  |  |
| me seat up/folded  |  |  |  |   |  |  |  |  |
| length seat up/folded  | 39.9/64.3 in   |  |  |   |  |  |  |  |
|  |  |  |  |   |  |  |  |  |
| or Dimensions  |  | P235 Tires   |  | P245 Tires  |  |  |  |  |
|  |  | 106.4 in   |  |   |  |  |  |  |
|  | gate-mounted spare tire  | 176.7 in   |  |   |  |  |  |  |
| w/tail   | gate-mounted spare tire  | 183.2 in   |  | 183.4 in  |  |  |  |  |
| and the second s |  | 70.4 in  |  |   |  |  |  |  |



LSE 4WD



LS 2WD



S V6 4WD



S V6 2WD



S 4-Cylinder 2WD

## Wheels



16" Gold Package Aluminum Alloy



16" Aluminum Alloy



15" Aluminum Alloy



The state of the last Air bags are a supplemental restraint whose effectiveness varies with speed, conditions and angle of impact.

The complete details.

The complete details are a supplemental restraint whose effectiveness varies with speed, conditions and angle of impact.

The complete details are a supplemental restraint whose effectiveness varies with speed, conditions and angle of impact.

The complete details are a supplemental restraint whose effectiveness varies with speed, conditions and angle of impact.

The complete details are a supplemental restraint whose effectiveness varies with speed, conditions and angle of impact.

66.5 in 68.8 in

70.4 in

w/o roof rack 66.1 in w/roof rack 68.5 in

NO





# SHORT

## WARRANTIES

one of the longest basic warranties in its class—36 months/50,000 miles. You can extended service contract with the Isuzu Protection Plan. You can even opt for a aid maintenance program. Of course, reliability won't help if you run out of gas, get it tire or lock yourself out. But we will, with 24-hour Roadside Assistance for the five years or 60,000 miles. (Ask any of our nearly 600 dealers for all the details.) It you buy a new Rodeo, our owner 800 line can answer any questions about its care. It before you visit a dealer, you can learn more about Isuzu vehicles on your own by taking out our web site at www.isuzu.com. (You'll also find out where to buy them,

www.isuzu.com

**ISUZU** 

Go farther.

1 000 705 0770