

ISUZU
TRUCK

N-SERIES

VEHICLE SERVICE AND SUPPORT PROGRAMS THAT PROVIDE REMARKABLE LIFECYCLE VALUE



**FOR ADDITIONAL INFORMATION ON
ISUZU'S FULL LINE OF LOW CAB FORWARD TRUCKS
PLEASE VISIT**

WWW.ISUZUCV.COM OR CALL (866) 441-9638

All photographs, illustrations, equipment and technical data in this brochure are based on the latest information available at the time of publication. Isuzu Commercial Truck of America, Inc. reserves the right to make changes at any time, without notice, in prices, colors, materials, equipment, specifications and models, and to discontinue models or equipment. Isuzu vehicles are assembled from component parts manufactured by Isuzu Motors Limited, its affiliated companies, and by independent suppliers who manufacture such components to Isuzu's exacting standards for quality, performance and safety. Some vehicles are shown with optional equipment. Some equipment is dealer installed. Visit your authorized Isuzu dealer for warranty and other details. NPR, NPR-HD, NPR-XD, NQR, and NRR are trademarks of Isuzu Motors Limited. Truck bodies represented herein are products of Supreme Corporation, Morgan Corporation and Thermo King. Facebook is a registered trademark of Facebook, Inc. Instagram is a registered trademark of Instagram, LLC. Twitter is a registered trademark of Twitter, Inc. LinkedIn is a registered trademark of LinkedIn Corporation. Neither Isuzu Commercial Truck of America, Inc. nor Isuzu Motors Limited are sponsored by or affiliated with these platforms.



Copyright © 2019 Isuzu Commercial Truck of America, Inc.
TM 10250 (02/19)



N-SERIES GAS

DURABLE V8 WITH A 200,000-MILE DESIGN LIFE

STANDARD CAB:

Body choices: 10 to 20 ft.*
GVWR: 12,000 & 14,500 lbs.
Wheelbase: 109.0 to 176.0 in.

EASY TO DRIVE:

Outstanding visibility and maneuverability provide an exceptional driving experience

CREW CAB:

SEATING FOR SEVEN

Body choices: 12 to 16 ft.*
GVWR: 12,000 & 14,500 lbs.
Wheelbase: 150.0 & 176.0 in.

ALTERNATIVE FUELS:

6.0L V8 - 297hp and 372 lb.-ft. torque CNG or LPG Capable



STANDARD CAB

NPR

Gas or CNG/LPG Capable
12,000 lb. GVWR
Body: up to 20 ft.*

NPR-HD

Gas or CNG/LPG Capable
14,500 lb. GVWR
Body: up to 20 ft.*

CREW CAB

NPR

Gas or CNG/LPG Capable
12,000 lb. GVWR
Body: up to 16 ft.*

NPR-HD

Gas or CNG/LPG Capable
14,500 lb. GVWR
Body: up to 16 ft.*

* Wheelbase dimension determines maximum body length.



N-SERIES DIESEL

THE UNDISPUTED CLASS 4 AND 5 WORKHORSE

STANDARD CAB:

Body choices: 10 to 24 ft.*
GVWR: 14,500 to 19,500 lbs.
Wheelbase: 109.0 to 212.0 in.

CREW CAB: SEATING FOR SEVEN

Body choices: 12 to 16 ft.*
GVWR: 14,500 to 19,500 lbs.
Wheelbase: 150.0 to 176.0 in.

EASY TO DRIVE:

Outstanding visibility and maneuverability provide an exceptional driving experience



STANDARD CAB

NPR-HD

215 hp. 5.2L
14,500 lb. GVWR
Body: up to 20 ft.*

NPR-XD

215 hp. 5.2L
16,000 lb. GVWR
Body: up to 20 ft.*

NQR

215 hp. 5.2L
17,950 lb. GVWR
Body: up to 22 ft.*

NRR

215 hp. 5.2L
19,500 lb. GVWR
Body: up to 24 ft.*

CREW CAB

NPR-HD

215 hp. 5.2L
14,500 lb. GVWR
Body: up to 16 ft.*

NPR-XD

215 hp. 5.2L
16,000 lb. GVWR
Body: up to 16 ft.*

NQR

215 hp. 5.2L
17,950 lb. GVWR
Body: up to 16 ft.*

NRR

215 hp. 5.2L
19,500 lb. GVWR
Body: up to 16 ft.*

* Wheelbase dimension determines maximum body length.



GAS N-SERIES SPECIFICATIONS	NPR GAS	NPR GAS CREW CAB	NPR-HD GAS	NPR-HD GAS CREW CAB
GVWR/GCWR	12,000/18,000 lbs.	12,000/18,000 lbs.	14,500/20,500 lbs.	14,500/20,500 lbs.
BODY/PAYLOAD ALLOWANCE	6,782-6,978 lbs.	6,246-6,308 lbs.	8,977-9,174 lbs.	8,442-8,503 lbs.
GAWR Front Rear	4,860 lbs. 8,840 lbs.	4,860 lbs. 8,840 lbs.	6,630 lbs. 11,020 lbs.	6,630 lbs. 11,020 lbs.
FRONT AXLE CAPACITY	6,830 lbs.	6,830 lbs.	6,830 lbs.	6,830 lbs.
REAR AXLE CAPACITY Ratio	11,020 lbs. 4.100	11,020 lbs. 4.100	11,020 lbs. 4.300	11,020 lbs. 4.300
SUSPENSION F/R SPRINGS Capacity	Tapered/Multi-Leaf 8,440/12,900 lbs.	Tapered/Multi-Leaf 8,440/12,900 lbs.	Tapered/Multi-Leaf 8,440/12,900 lbs.	Tapered/Multi-Leaf 8,440/12,900 lbs.
FRAME Section Modulus Resistance Bending Moment	7.20 in. ³ 316,800 lb.-in.	7.20 in. ³ 316,800 lb.-in.	7.20 in. ³ 316,800 lb.-in.	7.20 in. ³ 316,800 lb.-in.
SERVICE BRAKES Front/Rear	Vacuum/Hydraulic with 4-Channel ABS Disc/Drum	Vacuum/Hydraulic with 4-Channel ABS Disc/Drum	Vacuum/Hydraulic with 4-Channel ABS Disc/Drum	Vacuum/Hydraulic with 4-Channel ABS Disc/Drum
TRANSMISSION	6L90 6-speed auto. with double overdrive and lock-up converter	6L90 6-speed auto. with double overdrive and lock-up converter	6L90 6-speed auto. with double overdrive and lock-up converter	6L90 6-speed auto. with double overdrive and lock-up converter
ENGINE	GMPT L96 (Gen IV) V8 Vortec 6000 (Optional: KL8-Alternative Fuel Capable Engine)	GMPT L96 (Gen IV) V8 Vortec 6000 (Optional: KL8-Alternative Fuel Capable Engine)	GMPT L96 (Gen IV) V8 Vortec 6000 (Optional: KL8-Alternative Fuel Capable Engine)	GMPT L96 (Gen IV) V8 Vortec 6000 (Optional: KL8-Alternative Fuel Capable Engine)
Displacement Engine Power Engine Torque	6.0L (365 in. ³) 297hp @ 4,300 rpm 372 lb.-ft. @ 4,000 rpm	6.0L (365 in. ³) 297hp @ 4,300 rpm 372 lb.-ft. @ 4,000 rpm	6.0L (365 in. ³) 297hp @ 4,300 rpm 372 lb.-ft. @ 4,000 rpm	6.0L (365 in. ³) 297hp @ 4,300 rpm 372 lb.-ft. @ 4,000 rpm
LIMITED SLIP DIFFERENTIAL	Optional	Optional	Optional	Optional
ALTERNATOR	145-amp	145-amp	145-amp	145-amp
BATTERIES	1 Maintenance-Free 750-CCA	1 Maintenance-Free 750-CCA	1 Maintenance-Free 750-CCA	1 Maintenance-Free 750-CCA
TIRES LRR (Low Rolling Resistance)	215/85R16E (10-pr) Standard	215/85R16E (10-pr) Standard	225/70R19.5F/G (12/14-pr) Standard	225/70R19.5F/G (12/14-pr) Standard
STEERING	Integral Hydraulic Power	Integral Hydraulic Power	Integral Hydraulic Power	Integral Hydraulic Power
STEERING COLUMN	Tilt and Telescopic	Tilt and Telescopic	Tilt and Telescopic	Tilt and Telescopic
FUEL TANK	30 gal. in-frame	30 gal. in-frame	30 gal. in-frame	30 gal. in-frame

NPR / NPR-HD GAS									
Wheelbase (in.)	Cab to Axle (in.)	Cab to End of Frame (in.)	Back of Cab (in.)	Overall Length (in.)	Overall Width (in.)	Axle Width (in.)	Overall Height (in.)	Body Length (ft.)	
109.0	86.5	129.6	6.5	200.5	81.3	65.6	90.0/91.1	10-12	
132.5	110.0	153.1	6.5	224.0	81.3	65.6	90.0/91.1	14	
150.0	127.5	170.6	6.5	241.5	81.3	65.6	90.0/91.1	16-18	
176.0	153.5	196.6	6.5	267.5	81.3	65.6	90.0/91.1	18-20	

NPR / NPR-HD GAS CREW CAB									
Wheelbase (in.)	Cab to Axle (in.)	Cab to End of Frame (in.)	Back of Cab (in.)	Overall Length (in.)	Overall Width (in.)	Axle Width (in.)	Overall Height (in.)	Body Length (ft.)	
150.0	88.5	131.6	5.0	241.5	81.3	65.6	90.0/91.1	12	
176.0	114.5	157.6	5.0	267.5	81.3	65.6	90.0/91.1	16	

2019 ISUZU N-SERIES GAS WARRANTY COVERAGE AT A GLANCE				
Vehicle Coverage	Warranty Limitations (Time or Mileage, Whichever Comes First)*		Percentage of Dealer's Normal Charge Paid by Owner	
	Time in Years	Vehicle Miles	Parts	Labor
Basic	0-3 Years	0-36,000	No Charge	No Charge
Engine	0-5 Years	0-75,000	No Charge	No Charge
• Transmission	0-5 Years	0-75,000	No Charge	No Charge
• Drive Axle				
• Driveshaft				
• Front Axle I-Beam				
• Crossmembers	0-3 Years	0-36,000	No Charge	No Charge
Frame Rails				
	3-5 Years	Unlimited	50%	50%
Federal Emissions	0-5 Years	0-50,000	No Charge	No Charge
Engine Emissions Control System (NPR model) California	0-3 Years	0-50,000	No Charge	No Charge
Engine Emissions Control System (NPR model) California	0-7 Years	0-70,000	No Charge	No Charge
Tires	0-2 Years	0-24,000	No Charge	No Charge
Corrosion (Rust Through)	0-4 Years	Unlimited	No Charge	No Charge



*The warranty coverages are determined by the mileage of the vehicle and the number of years from the delivery date. See your authorized Isuzu dealer for warranty details.

N-SERIES DIMENSIONS

GAS AND DIESEL MEASUREMENTS


2020 ISUZU N-SERIES DIESEL WARRANTY COVERAGE AT A GLANCE				
Vehicle Coverage	Warranty Limitations (Time or Mileage, Whichever Comes First)*		Percentage of Dealer's Normal Charge Paid by Owner	
	Time in Years	Vehicle Miles	Parts	Labor
Basic	0-3 Years	Unlimited	No Charge	No Charge
Engine	0-3 Years	Unlimited	No Charge	No Charge
• Transmission	0-3 Years	Unlimited	No Charge	No Charge
• Drive Axle				
• Driveshaft				
• Front Axle I-Beam				
• Crossmembers	0-3 Years	Unlimited	No Charge	No Charge
• Flywheel Housing				
• Clutch Housing	0-3 Years	Unlimited	No Charge	No Charge
Frame Rails				
	3-5 Years	Unlimited	50%	50%
Engine Emissions Control System - Federal	0-5 Years	0-100,000	No Charge	No Charge
California Emissions Performance: NPR	0-3 Years	0-50,000	No Charge	No Charge
California Emissions Long-Term Defects: NPR	0-7 Years	0-70,000	No Charge	No Charge
Tires	0-2 Years	0-24,000	No Charge	No Charge
Corrosion (Rust Through)	0-4 Years	Unlimited	No Charge	No Charge

*The warranty coverages are determined by the mileage of the vehicle and the number of years from the delivery date. See your authorized Isuzu dealer for warranty details.

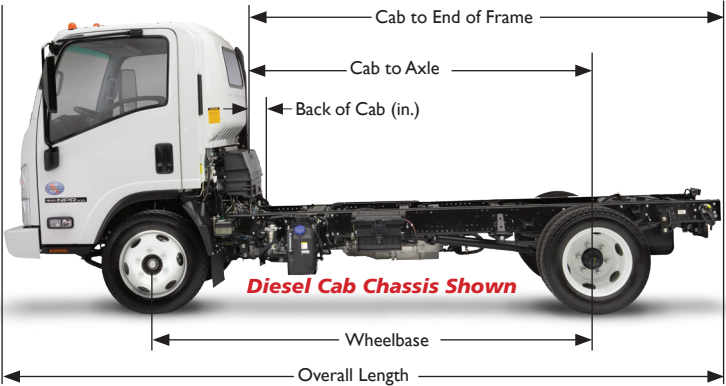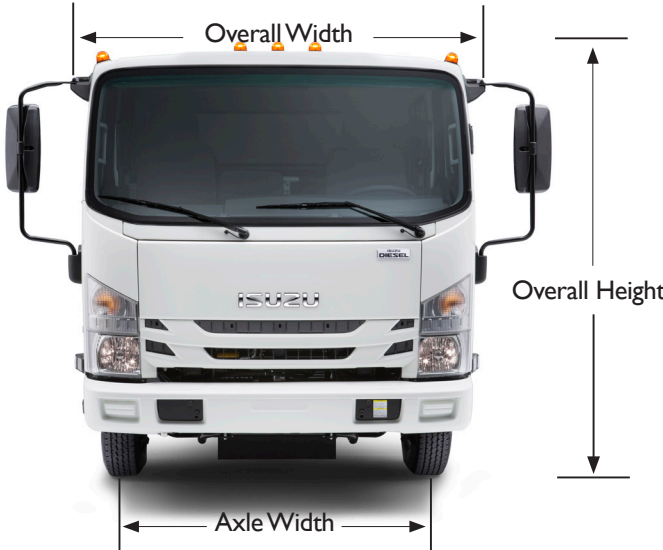

2020 ISUZU N-SERIES DIESEL NPR-HD / NPR-XD / NQR / NRR									
Wheelbase (in.)	Cab to Axle (in.)	Cab to End of Frame (in.)	Back of Cab (in.)	Overall Length (in.)	Overall Width (in.)	Axle Width (in.)	Overall Height (in.)	Body Length (ft.)	
109.0	86.5	129.6	7.7	200.5	81.3	65.6	90.8/92.4	10-12	
132.5	110.0	153.1	7.7	224.0	81.3	65.6	90.8/92.4	14	
150.0	127.5	170.6	7.7	241.5	81.3	65.6	90.8/92.4	16-18	
176.0	153.5	196.6	7.7	267.5	81.3	65.6	90.8/92.4	18-20	
200.0 [†]	177.5	220.6	7.7	291.5	81.3	65.6	92.4	22	
212.0 ^{††}	189.5	232.6	7.7	303.5	81.3	65.6	92.4	24	

[†]NPR-HD only 10.2 ^{††}NQR, NRR only ^{†††}NRR only

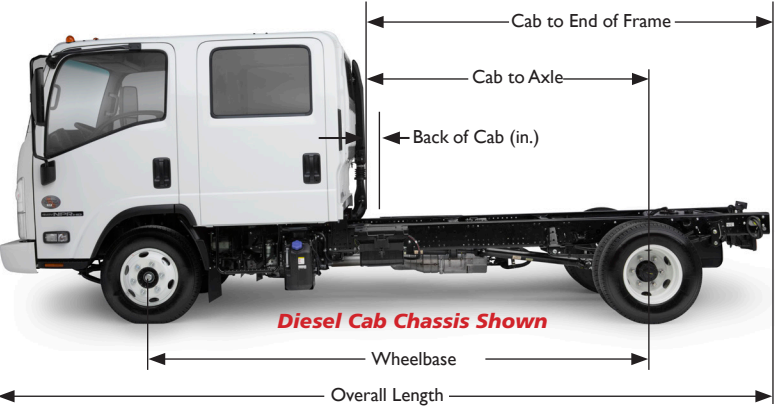

2020 ISUZU N-SERIES DIESEL NPR-HD / NPR-XD / NQR / NRR CREW CAB									
Wheelbase (in.)	Cab to Axle (in.)	Cab to End of Frame (in.)	Back of Cab (in.)	Overall Length (in.)	Overall Width (in.)	Axle Width (in.)	Overall Height (in.)	Body Length (ft.)	
150.0	88.5	131.6	5.3	241.5	81.3	65.6	90.8/92.4*	12	
176.0	114.5	157.6	5.3	267.5	81.3	65.6	90.8/92.4*	16	

*NPR-HD Crew Cab / NPR-XD Crew Cab, NQR Crew Cab, NRR Crew Cab

DIESEL N-SERIES SPECIFICATIONS	NPR-HD	NPR-HD CREW CAB	NPR-XD	NPR-XD CREW CAB	NQR	NQR CREW CAB	NRR	NRR CREW CAB
GVWR/GCWR	14,500/20,500 lbs.	14,500/20,500 lbs.	16,000 lbs./22,000 lbs.	16,000 lbs./22,000 lbs.	17,950/23,950 lbs.	17,950/23,950 lbs.	19,500/25,500 lbs.	19,500/25,500 lbs.
BODY/PAYLOAD ALLOWANCE	8,339-8,536 lbs.	7,766-7,832 lbs.	9,410-9,607 lbs.	8,840-8,905 lbs.	10,939-11,461 lbs.	10,680-10,748 lbs.	12,294-12,875 lbs.	12,181-12,250 lbs.
GAWR Front Rear	5,360 lbs. 9,880 lbs.	5,360 lbs. 9,880 lbs.	6,630 lbs. 11,020 lbs.	6,630 lbs. 11,020 lbs.	6,830 lbs. 12,980 lbs.	6,830 lbs. 12,980 lbs.	7,275 lbs. 13,660 lbs.	7,275 lbs. 12,980 lbs.
FRONT AXLE CAPACITY	6,830 lbs.	6,830 lbs.	6,830 lbs.	6,830 lbs.	6,830 lbs.	6,830 lbs.	7,275 lbs.	7,275 lbs.
REAR AXLE CAPACITY Ratio	11,020 lbs. 4.555	11,020 lbs. 4.555	11,020 lbs. 4.777	11,020 lbs. 4.777	14,550 lbs. 5.125	14,550 lbs. 5.125	14,550 lbs. 5.571	14,550 lbs. 5.571
SUSPENSION F/R SPRINGS Capacity	Tapered/Multi-Leaf 6,830/9,880 lbs.	Tapered/Multi-Leaf 6,830/9,880 lbs.	Tapered/Multi-Leaf 8,440/14,308 lbs.	Tapered/Multi-Leaf 8,440/14,308 lbs.	Tapered/Multi-Leaf 8,440/14,550 lbs.	Tapered/Multi-Leaf 8,440/14,550 lbs.	Tapered/Multi-Leaf 8,440/14,550 lbs.	Tapered/Multi-Leaf 8,440/14,550 lbs.
FRAME Section Modulus Resistance Bending Moment	7.20 in. ³ 316,800 lb.-in.	11.89 in. ³ 523,160 lb.-in.	7.20 in. ³ 316,800 lb.-in.	11.89 in. ³ 523,160 lb.-in.	7.20 in. ³ 316,800 lb.-in.	11.89 in. ³ 523,160 lb.-in.	7.20 in. ³ 316,800 lb.-in.	11.89 in. ³ 523,160 lb.-in.
SERVICE BRAKES Front/Rear	Vacuum/Hydraulic with 4-Channel ABS Disc/Drum	Vacuum/Hydraulic with 4-Channel ABS Disc/Drum	Vacuum/Hydraulic with 4-Channel ABS Disc/Drum	Vacuum/Hydraulic with 4-Channel ABS Disc/Drum	Hydraulic Boosted with 4-Channel ABS Disc/Drum	Hydraulic Boosted with 4-Channel ABS Disc/Drum	Hydraulic Boosted with 4-Channel ABS Disc/Drum	Hydraulic Boosted with 4-Channel ABS Disc/Drum
EXHAUST BRAKE	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard
TRANSMISSION	Aisin A4565id 6-speed auto. with double overdrive and lock-up 2 nd -6 th gears	Aisin A4565id 6-speed auto. with double overdrive and lock-up 2 nd -6 th gears	Aisin A4565id 6-speed auto. with double overdrive and lock-up 2 nd -6 th gears	Aisin A4565id 6-speed auto. with double overdrive and lock-up 2 nd -6 th gears	Aisin A4565id 6-speed auto. with double overdrive and lock-up 2 nd -6 th gears	Aisin A4565id 6-speed auto. with double overdrive and lock-up 2 nd -6 th gears	Aisin A4565id 6-speed auto. with double overdrive and lock-up 2 nd -6 th gears	Aisin A4565id 6-speed auto. with double overdrive and lock-up 2 nd -6 th gears
ENGINE Displacement Engine Power Engine Torque	Isuzu 4HK1-TC turbocharged intercooled diesel 5.2L (317 in. ³) 215hp @ 2,500 rpm 452 lb.-ft. @ 1,850 rpm	Isuzu 4HK1-TC turbocharged intercooled diesel 5.2L (317 in. ³) 215hp @ 2,500 rpm 452 lb.-ft. @ 1,850 rpm	Isuzu 4HK1-TC turbocharged intercooled diesel 5.2L (317 in. ³) 215hp @ 2,500 rpm 452 lb.-ft. @ 1,850 rpm	Isuzu 4HK1-TC turbocharged intercooled diesel 5.2L (317 in. ³) 215hp @ 2,500 rpm 452 lb.-ft. @ 1,850 rpm	Isuzu 4HK1-TC turbocharged intercooled diesel 5.2L (317 in. ³) 215hp @ 2,500 rpm 452 lb.-ft. @ 1,850 rpm	Isuzu 4HK1-TC turbocharged intercooled diesel 5.2L (317 in. ³) 215hp @ 2,500 rpm 452 lb.-ft. @ 1,850 rpm	Isuzu 4HK1-TC turbocharged intercooled diesel 5.2L (317 in. ³) 215hp @ 2,500 rpm 452 lb.-ft. @ 1,850 rpm	Isuzu 4HK1-TC turbocharged intercooled diesel 5.2L (317 in. ³) 215hp @ 2,500 rpm 452 lb.-ft. @ 1,850 rpm
OIL LEVEL INDICATOR	Dash-mounted oil level check switch and light	Dash-mounted oil level check switch and light	Dash-mounted oil level check switch and light	Dash-mounted oil level check switch and light	Dash-mounted oil level check switch and light	Dash-mounted oil level check switch and light	Dash-mounted oil level check switch and light	Dash-mounted oil level check switch and light
LIMITED SLIP DIFFERENTIAL	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional
ALTERNATOR	140-amp	140-amp	140-amp	140-amp	140-amp	140-amp	140-amp	140-amp
BATTERIES	2 Maintenance-Free 750-CCA	2 Maintenance-Free 750-CCA	2 Maintenance-Free 750-CCA	2 Maintenance-Free 750-CCA	2 Maintenance-Free 750-CCA	2 Maintenance-Free 750-CCA	2 Maintenance-Free 750-CCA	2 Maintenance-Free 750-CCA
TIRES LRR (Low Rolling Resistance)	215/85R16E (10-pr) Standard	215/85R16E (10-pr) Standard	225/70R19.5F (12-pr) Standard	225/70R19.5F (12-pr) Standard	225/70R19.5F (12-pr) Standard	225/70R19.5F (12-pr) Standard	225/70R19.5F (12-pr) Standard	225/70R19.5F (12-pr) Standard
STEERING	Integral Hydraulic Power	Integral Hydraulic Power	Integral Hydraulic Power	Integral Hydraulic Power	Integral Hydraulic Power	Integral Hydraulic Power	Integral Hydraulic Power	Integral Hydraulic Power
STEERING COLUMN	Tilt and Telescopic	Tilt and Telescopic	Tilt and Telescopic	Tilt and Telescopic	Tilt and Telescopic	Tilt and Telescopic	Tilt and Telescopic	Tilt and Telescopic
FUEL TANK Standard Optional	30 gal. in-rail 33 gal. side mount (176" WB Only)	30 gal. in-rail N/A	30 gal. in-rail 33 gal. side mount (176" WB Only)	30 gal. in-rail N/A	30 gal. in-rail 33 gal. side mount (176" WB Only)	30 gal. in-rail N/A	30 gal. in-rail 33 gal. side mount (176" WB Only)	30 gal. in-rail N/A
FUEL/WATER SEPARATOR	Dual fuel filter with dash mounted indicator light	Dual fuel filter with dash mounted indicator light	Dual fuel filter with dash mounted indicator light	Dual fuel filter with dash mounted indicator light	Dual fuel filter with dash mounted indicator light	Dual fuel filter with dash mounted indicator light	Dual fuel filter with dash mounted indicator light	Dual fuel filter with dash mounted indicator light




NPR GAS

STANDARD CAB



GVWR/GCWR	12,000/18,000 lbs.
BODY/PAYLOAD ALLOWANCE	6,782 - 6,978 lbs.
GAWR	
Front	4,860 lbs.
Rear	8,840 lbs.
FRONT AXLE CAPACITY	6,830 lbs.
REAR AXLE CAPACITY	11,020 lbs.
Ratio	4.100
SUSPENSION F/R SPRINGS	Tapered/Multi-Leaf
Capacity	8,440/12,900 lbs.
FRAME	
Section Modulus	7.20 in. ³
Resistance Bending Moment	316,800 lb.-in.
SERVICE BRAKES	Vacuum/Hydraulic with
Front/Rear	4-Channel ABS Disc/Drum
TRANSMISSION	6L90 6-speed auto. with
	double overdrive and
	lock-up converter
ENGINE	GMPT L96 (Gen IV) V8 Vortec
	6000 (Optional: KL8 - Alternative
	Fuel Capable Engine)
Displacement	6.0L (365 in. ³)
Engine Power	297 hp @ 4,300 rpm
Engine Torque	372 lb.-ft. @ 4,000 rpm
LIMITED SLIP DIFFERENTIAL	Optional
ALTERNATOR	145-amp
BATTERIES	1 Maintenance-Free
	750-CCA
TIRES LRR (Low Rolling Resistance)	215/85R16E (10-pr)
	Standard
STEERING	Integral Hydraulic Power
STEERING COLUMN	Tilt and Telescopic
FUEL TANK	
Standard	30 gal. in-frame

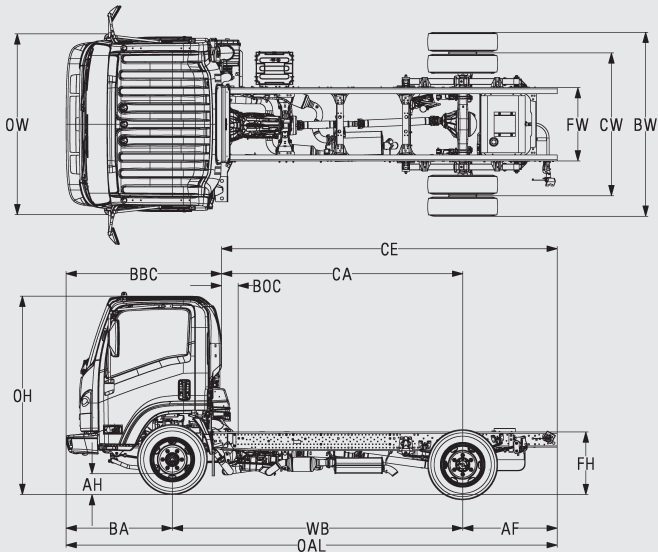



NPR GAS									
Wheelbase (in.)	Cab to Axle (in.)	Cab to End of Frame (in.)	Back of Cab (in.)	Overall Length (in.)	Overall Width (in.)	Axle Width (in.)	Overall Height (in.)	Body Length (ft.)	
109.0	86.5	129.6	6.5	200.5	81.3	65.6	90.0	10-12	
132.5	110.0	153.1	6.5	224.0	81.3	65.6	90.0	14	
150.0	127.5	170.6	6.5	241.5	81.3	65.6	90.0	16-18	
176.0	153.5	196.6	6.5	267.5	81.3	65.6	90.0	18-20	

NPR GAS

CREW CAB



GVWR/GCWR	12,000/18,000 lbs.
BODY/PAYLOAD ALLOWANCE	6,246 - 6,308 lbs.
GAWR	
Front	4,860 lbs.
Rear	8,840 lbs.
FRONT AXLE CAPACITY	6,830 lbs.
REAR AXLE CAPACITY	11,020 lbs.
Ratio	4.100
SUSPENSION F/R SPRINGS	Tapered/Multi-Leaf
Capacity	8,440/12,900 lbs.
FRAME	
Section Modulus	7.20 in. ³
Resistance Bending Moment	316,800 lb.-in.
SERVICE BRAKES	Vacuum/Hydraulic with
Front/Rear	4-Channel ABS Disc/Drum
TRANSMISSION	6L90 6-speed auto. with
	double overdrive and
	lock-up converter
ENGINE	GMPT L96 (Gen IV) V8 Vortec
	6000 (Optional: KL8 - Alternative
	Fuel Capable Engine)
Displacement	6.0L (365 in. ³)
Engine Power	297 hp @ 4,300 rpm
Engine Torque	372 lb.-ft. @ 4,000 rpm
LIMITED SLIP DIFFERENTIAL	Optional
ALTERNATOR	145-amp
BATTERIES	1 Maintenance-Free
	750-CCA
TIRES LRR (Low Rolling Resistance)	215/85R16E (10-pr)
	Standard
STEERING	Integral Hydraulic Power
STEERING COLUMN	Tilt and Telescopic
FUEL TANK	
Standard	30 gal. in-frame

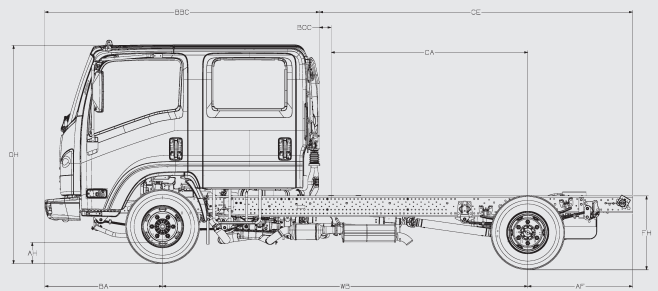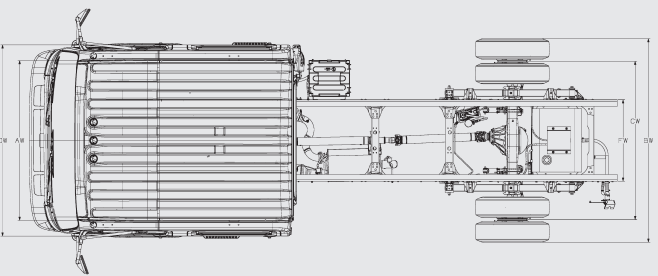


NPR GAS CREW CAB									
Wheelbase (in.)	Cab to Axle (in.)	Cab to End of Frame (in.)	Back of Cab (in.)	Overall Length (in.)	Overall Width (in.)	Axle Width (in.)	Overall Height (in.)	Body Length (ft.)	
150.0	88.5	131.6	5.0	241.5	81.3	65.6	90.0	12	
176.0	114.5	157.6	5.0	267.5	81.3	65.6	90.0	16	

NPR-HD GAS

STANDARD CAB



GVWR/GCWR	14,500/20,500 lbs.
BODY/PAYLOAD ALLOWANCE	8,977 - 9,174 lbs.
GAWR	
Front	6,630 lbs.
Rear	11,020 lbs.
FRONT AXLE CAPACITY	6,830 lbs.
REAR AXLE CAPACITY	11,020 lbs.
Ratio	4.300
SUSPENSION F/R SPRINGS	Tapered/Multi-Leaf
Capacity	8,440/12,900 lbs.
FRAME	
Section Modulus	7.20 in. ³
Resistance Bending Moment	316,800 lb.-in.
SERVICE BRAKES	Vacuum/Hydraulic with
Front/Rear	4-Channel ABS Disc/Drum
TRANSMISSION	6L90 6-speed auto. with
	double overdrive and
	lock-up converter
ENGINE	GMPT L96 (Gen IV) V8 Vortec
	6000 (Optional: KL8 - Alternative
	Fuel Capable Engine)
Displacement	6.0L (365 in. ³)
Engine Power	297 hp @ 4,300 rpm
Engine Torque	372 lb.-ft. @ 4,000 rpm
LIMITED SLIP DIFFERENTIAL	Optional
ALTERNATOR	145-amp
BATTERIES	1 Maintenance-Free
	750-CCA
TIRES LRR (Low Rolling Resistance)	225/70R19.5F/G (12/14-pr)
	Standard
STEERING	Integral Hydraulic Power
STEERING COLUMN	Tilt and Telescopic
FUEL TANK	
Standard	30 gal. in-frame

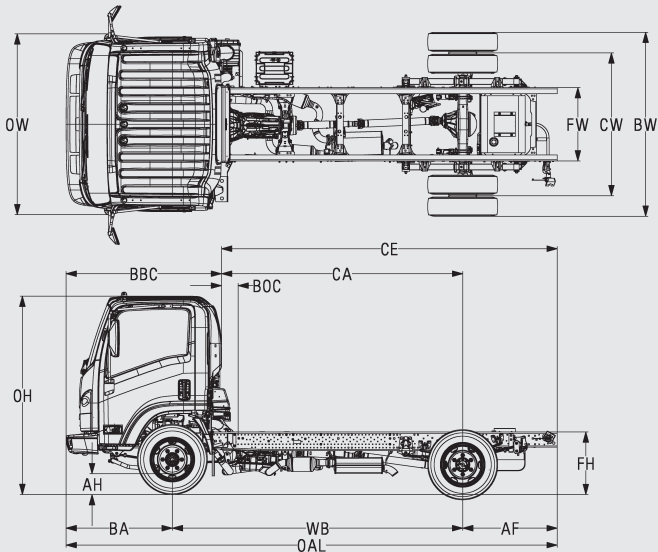



NPR-HD GAS									
Wheelbase (in.)	Cab to Axle (in.)	Cab to End of Frame (in.)	Back of Cab (in.)	Overall Length (in.)	Overall Width (in.)	Axle Width (in.)	Overall Height (in.)	Body Length (ft.)	
109.0	86.5	129.6	6.5	200.5	81.3	65.6	91.1	10-12	
132.5	110.0	153.1	6.5	224.0	81.3	65.6	91.1	14	
150.0	127.5	170.6	6.5	241.5	81.3	65.6	91.1	16-18	
176.0	153.5	196.6	6.5	267.5	81.3	65.6	91.1	18-20	

NPR-HD GAS

CREW CAB



GVWR/GCWR	14,500/20,500 lbs.
BODY/PAYLOAD ALLOWANCE	8,442 - 8,503 lbs.
GAWR	
Front	6,630 lbs.
Rear	11,020 lbs.
FRONT AXLE CAPACITY	6,830 lbs.
REAR AXLE CAPACITY	11,020 lbs.
Ratio	4.300
SUSPENSION F/R SPRINGS	Tapered/Multi-Leaf
Capacity	8,440/12,900 lbs.
FRAME	
Section Modulus	7.20 in. ³
Resistance Bending Moment	316,800 lb.-in.
SERVICE BRAKES	Vacuum/Hydraulic with
Front/Rear	4-Channel ABS Disc/Drum
TRANSMISSION	6L90 6-speed auto. with
	double overdrive and
	lock-up converter
ENGINE	GMPT L96 (Gen IV) V8 Vortec
	6000 (Optional: KL8 - Alternative
	Fuel Capable Engine)
Displacement	6.0L (365 in. ³)
Engine Power	297 hp @ 4,300 rpm
Engine Torque	372 lb.-ft. @ 4,000 rpm
LIMITED SLIP DIFFERENTIAL	Optional
ALTERNATOR	145-amp
BATTERIES	1 Maintenance-Free
	750-CCA
TIRES LRR (Low Rolling Resistance)	225/70R19.5F/G (12/14-pr)
	Standard
STEERING	Integral Hydraulic Power
STEERING COLUMN	Tilt and Telescopic
FUEL TANK	
Standard	30 gal. in-frame

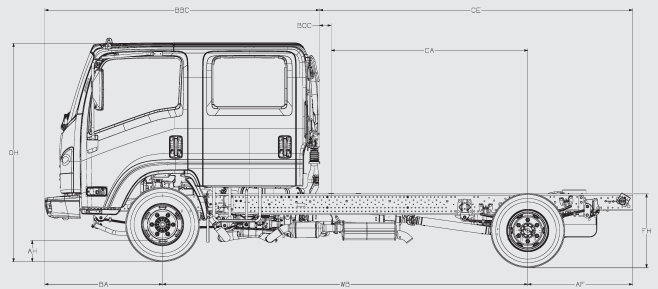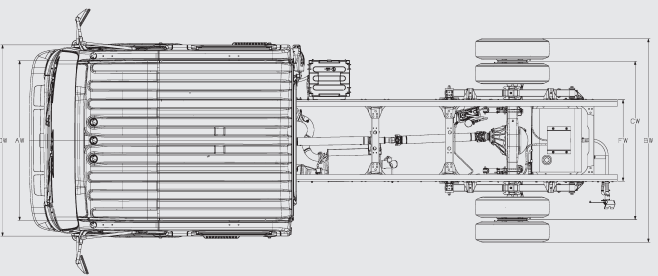

NPR-HD GAS CREW CAB									
Wheelbase (in.)	Cab to Axle (in.)	Cab to End of Frame (in.)	Back of Cab (in.)	Overall Length (in.)	Overall Width (in.)	Axle Width (in.)	Overall Height (in.)	Body Length (ft.)	
150.0	88.5	131.6	5.0	241.5	81.3	65.6	91.1	12	
176.0	114.5	157.6	5.0	267.5	81.3	65.6	91.1	16	





**THE #1 SELLING LCF TRUCK
IN AMERICA SINCE 1986**

NPR-HD DIESEL

STANDARD CAB



GVWR/GCWR	14,500/20,500 lbs.
BODY/PAYLOAD ALLOWANCE	8,339-8,536 lbs.
GAWR	
Front	5,360 lbs.
Rear	9,880 lbs.
FRONT AXLE CAPACITY	6,830 lbs.
REAR AXLE CAPACITY	11,020 lbs.
Ratio	4.555
SUSPENSION F/R SPRINGS	Tapered/Multi-Leaf
Capacity	6,830/9,880 lbs.
FRAME	
Section Modulus	7.20 in. ³
Resistance Bending Moment	316,800 lb.-in.
SERVICE BRAKES	Vacuum/Hydraulic with
Front/Rear	4-Channel ABS Disc/Drum
EXHAUST BRAKE	Standard
TRANSMISSION	Aisin A465id 6-speed auto.
	with double overdrive
	and lock-up 2 nd -6 th gears
ENGINE	Isuzu 4HK1-TC turbocharged
	intercooled diesel
Displacement	5.2L (317 in. ³)
Engine Power	215 hp @ 2,500 rpm
Engine Torque	452 lb.-ft. @ 1,850 rpm
OIL LEVEL INDICATOR	Dash-mounted oil level
	check switch and light
LIMITED SLIP DIFFERENTIAL	Optional
ALTERNATOR	140-amp
BATTERIES	2 Maintenance-Free
	750-CCA
TIRES LRR (Low Rolling Resistance)	215/85R16E (10-pr) Standard
STEERING	Integral Hydraulic Power
STEERING COLUMN	Tilt and Telescopic
FUEL TANK	
Standard	30 gal. in-rail
Optional	33 gal. side mount
	(176" WB Only)
FUEL/WATER SEPARATOR	Dual fuel filter with dash
	mounted indicator light

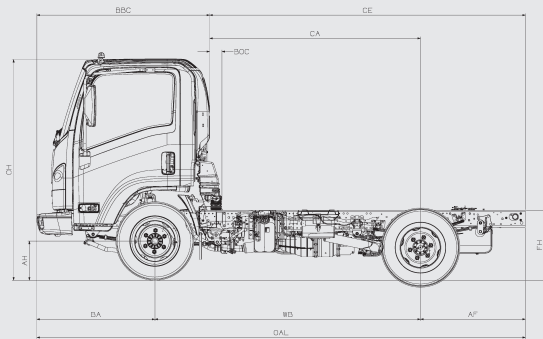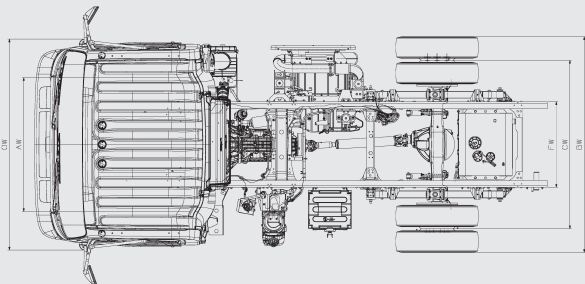



NPR-HD									
Wheelbase (in.)	Cab to Axle (in.)	Cab to End of Frame (in.)	Back of Cab (in.)	Overall Length (in.)	Overall Width (in.)	Axle Width (in.)	Overall Height (in.)	Body Length (ft.)	
109.0	86.5	129.6	7.7	200.5	81.3	65.6	90.8	10-12	
132.5	110.0	153.1	7.7	224.0	81.3	65.6	90.8	14	
150.0	127.5	170.6	10.2	241.5	81.3	65.6	90.8	16-18	
176.0	153.5	196.6	10.2	267.5	81.3	65.6	90.8	18-20	

NPR-HD DIESEL

CREW CAB



GVWR/GCWR	14,500/20,500 lbs.
BODY/PAYLOAD ALLOWANCE	7,766-7,832 lbs.
GAWR	
Front	5,360 lbs.
Rear	9,880 lbs.
FRONT AXLE CAPACITY	6,830 lbs.
REAR AXLE CAPACITY	11,020 lbs.
Ratio	4.555
SUSPENSION F/R SPRINGS	Tapered/Multi-Leaf
Capacity	6,830/9,880 lbs.
FRAME	
Section Modulus	11.89 in. ³
Resistance Bending Moment	523,160 lb.-in.
SERVICE BRAKES	Vacuum/Hydraulic with
Front/Rear	4-Channel ABS Disc/Drum
EXHAUST BRAKE	Standard
TRANSMISSION	Aisin A465id 6-speed auto.
	with double overdrive
	and lock-up 2 nd -6 th gears
ENGINE	Isuzu 4HK1-TC turbocharged
	intercooled diesel
Displacement	5.2L (317 in. ³)
Engine Power	215 hp @ 2,500 rpm
Engine Torque	452 lb.-ft. @ 1,850 rpm
OIL LEVEL INDICATOR	Dash-mounted oil level
	check switch and light
LIMITED SLIP DIFFERENTIAL	Optional
ALTERNATOR	140-amp
BATTERIES	2 Maintenance-Free
	750-CCA
TIRES LRR (Low Rolling Resistance)	215/85R16E (10-pr) Standard
STEERING	Integral Hydraulic Power
STEERING COLUMN	Tilt and Telescopic
FUEL TANK	
Standard	30 gal. in-rail
FUEL/WATER SEPARATOR	Dual fuel filter with dash
	mounted indicator light

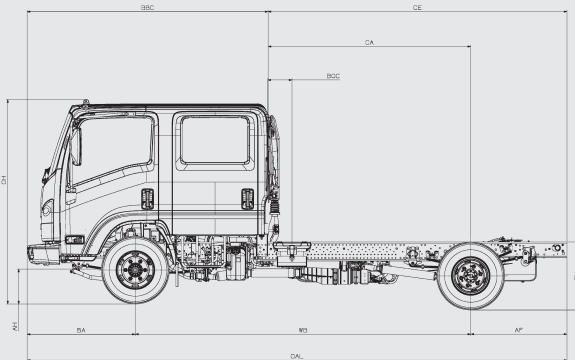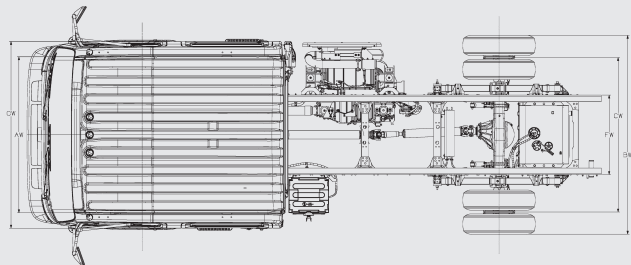

NPR-HD DIESEL CREW CAB									
Wheelbase (in.)	Cab to Axle (in.)	Cab to End of Frame (in.)	Back of Cab (in.)	Overall Length (in.)	Overall Width (in.)	Axle Width (in.)	Overall Height (in.)	Body Length (ft.)	
150.0	88.5	131.6	5.3	241.5	81.3	65.6	90.8	12	
176.0	114.5	157.6	5.3	267.5	81.3	65.6	90.8	16	





NPR-XD DIESEL

STANDARD CAB



GVWR/GCWR	16,000/22,000 lbs.
BODY/PAYLOAD ALLOWANCE	9,410-9,607 lbs.
GAWR Front Rear	6,630 lbs. 11,020 lbs.
FRONT AXLE CAPACITY	6,830 lbs.
REAR AXLE CAPACITY Ratio	11,020 lbs. 4.777
SUSPENSION F/R SPRINGS Capacity	Tapered/Multi-Leaf 8,440/14,308 lbs.
FRAME Section Modulus Resistance Bending Moment	7.20 in. ³ 316,800 lb.-in.
SERVICE BRAKES Front/Rear	Vacuum/Hydraulic with 4-Channel ABS Disc/Drum
EXHAUST BRAKE	Standard
TRANSMISSION	Aisin A465id 6-speed auto. with double overdrive and lock-up 2 nd -6 th gears
ENGINE	Isuzu 4HK1-TC turbocharged intercooled diesel
Displacement Engine Power Engine Torque	5.2L (317 in. ³) 215 hp @ 2,500 rpm 452 lb.-ft. @ 1,850 rpm
OIL LEVEL INDICATOR	Dash-mounted oil level check switch and light
LIMITED SLIP DIFFERENTIAL	Optional
ALTERNATOR	140-amp
BATTERIES	2 Maintenance-Free 750-CCA
TIRES LRR (Low Rolling Resistance)	225/70R19.5F (12-pr) Standard
STEERING	Integral Hydraulic Power
STEERING COLUMN	Tilt and Telescopic
FUEL TANK Standard Optional	30 gal. in-rail 33 gal. side mount (176" WB Only)
FUEL/WATER SEPARATOR	Dual fuel filter with dash mounted indicator light

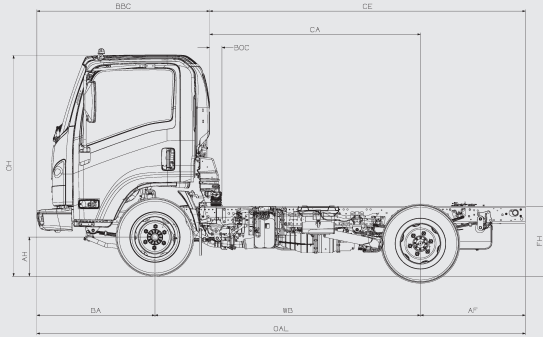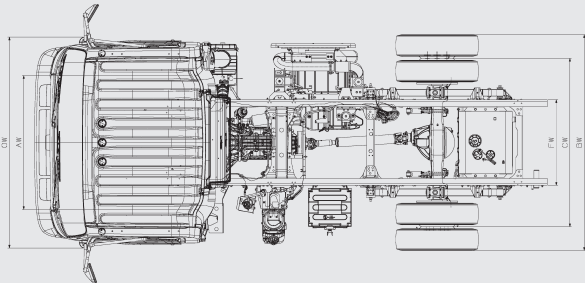



NPR-XD									
Wheelbase (in.)	Cab to Axle (in.)	Cab to End of Frame (in.)	Back of Cab (in.)	Overall Length (in.)	Overall Width (in.)	Axle Width (in.)	Overall Height (in.)	Body Length (ft.)	
109.0	86.5	129.6	7.7	200.5	81.3	65.6	92.4	10-12	
132.5	110.0	153.1	7.7	224.0	81.3	65.6	92.4	14	
150.0	127.5	170.6	7.7	241.5	81.3	65.6	92.4	16-18	
176.0	153.5	196.6	7.7	267.5	81.3	65.6	92.4	18-20	

NPR-XD DIESEL

CREW CAB



GVWR/GCWR	16,000/22,000 lbs.
BODY/PAYLOAD ALLOWANCE	8,840-8,905 lbs.
GAWR Front Rear	6,630 lbs. 11,020 lbs.
FRONT AXLE CAPACITY	6,830 lbs.
REAR AXLE CAPACITY Ratio	11,020 lbs. 4.777
SUSPENSION F/R SPRINGS Capacity	Tapered/Multi-Leaf 8,440/14,308 lbs.
FRAME Section Modulus Resistance Bending Moment	11.89 in. ³ 523,160 lb.-in.
SERVICE BRAKES Front/Rear	Vacuum/Hydraulic with 4-Channel ABS Disc/Drum
EXHAUST BRAKE	Standard
TRANSMISSION	Aisin A465id 6-speed auto. with double overdrive and lock-up 2 nd -6 th gears
ENGINE	Isuzu 4HK1-TC turbocharged intercooled diesel
Displacement Engine Power Engine Torque	5.2L (317 in. ³) 215 hp @ 2,500 rpm 452 lb.-ft. @ 1,850 rpm
OIL LEVEL INDICATOR	Dash-mounted oil level check switch and light
LIMITED SLIP DIFFERENTIAL	Optional
ALTERNATOR	140-amp
BATTERIES	2 Maintenance-Free 750-CCA
TIRES LRR (Low Rolling Resistance)	225/70R19.5F (12-pr) Standard
STEERING	Integral Hydraulic Power
STEERING COLUMN	Tilt and Telescopic
FUEL TANK Standard	30 gal. in-rail
FUEL/WATER SEPARATOR	Dual fuel filter with dash mounted indicator light

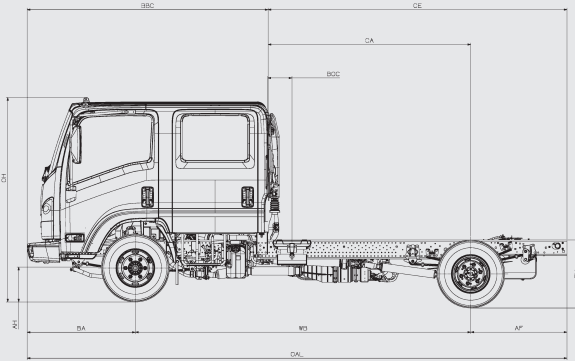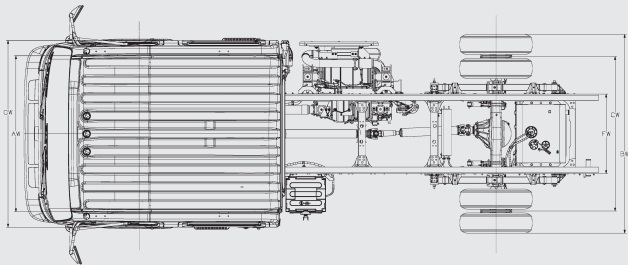

NPR-XD DIESEL CREW CAB									
Wheelbase (in.)	Cab to Axle (in.)	Cab to End of Frame (in.)	Back of Cab (in.)	Overall Length (in.)	Overall Width (in.)	Axle Width (in.)	Overall Height (in.)	Body Length (ft.)	
150.0	88.5	131.6	5.3	241.5	81.3	65.6	92.4	12	
176.0	114.5	157.6	5.3	267.5	81.3	65.6	92.4	16	





NQR DIESEL

STANDARD CAB



GVWR/GCWR	17,950/23,950 lbs.
BODY/PAYLOAD ALLOWANCE	10,939-11,461 lbs.
GAWR	
Front	6,830 lbs.
Rear	12,980 lbs.
FRONT AXLE CAPACITY	6,830 lbs.
REAR AXLE CAPACITY	14,550 lbs.
Ratio	5.125
SUSPENSION F/R SPRINGS	Tapered/Multi-Leaf
Capacity	8,440/14,550 lbs.
FRAME	
Section Modulus	7.20 in. ³
Resistance Bending Moment	316,800 lb.-in.
SERVICE BRAKES	Hydraulic Boosted with
Front/Rear	4-Channel ABS Disc/Drum
EXHAUST BRAKE	Standard
TRANSMISSION	Aisin A465id 6-speed auto.
	with double overdrive
	and lock-up 2 nd -6 th gears
ENGINE	Isuzu 4HK1-TC turbocharged
	intercooled diesel
Displacement	5.2L (317 in. ³)
Engine Power	215 hp @ 2,500 rpm
Engine Torque	452 lb.-ft. @ 1,850 rpm
OIL LEVEL INDICATOR	Dash-mounted oil level
	check switch and light
LIMITED SLIP DIFFERENTIAL	Optional
ALTERNATOR	140-amp
BATTERIES	2 Maintenance-Free
	750-CCA
TIRES LRR (Low Rolling Resistance)	225/70R19.5F (12-pr) Standard
STEERING	Integral Hydraulic Power
STEERING COLUMN	Tilt and Telescopic
FUEL TANK	
Standard	30 gal. in-rail
Optional	33 gal. side mount
	(176" WB Only)
FUEL/WATER SEPARATOR	Dual fuel filter with dash
	mounted indicator light

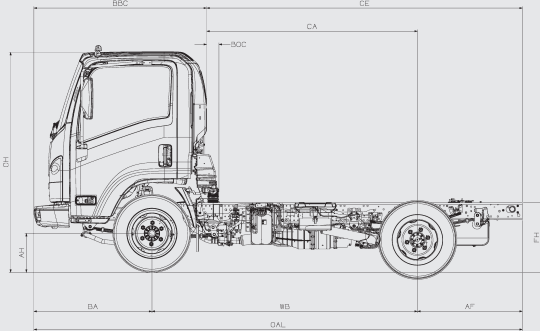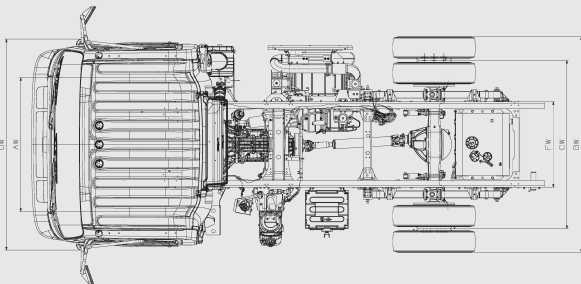



NQR									
Wheelbase (in.)	Cab to Axle (in.)	Cab to End of Frame (in.)	Back of Cab (in.)	Overall Length (in.)	Overall Width (in.)	Axle Width (in.)	Overall Height (in.)	Body Length (ft.)	
109.0	86.5	129.6	7.7	200.5	81.3	65.6	92.4	10-12	
132.5	110.0	153.1	7.7	224.0	81.3	65.6	92.4	14	
150.0	127.5	170.6	7.7	241.5	81.3	65.6	92.4	16-18	
176.0	153.5	196.6	7.7	267.5	81.3	65.6	92.4	18-20	
200.0	177.5	220.6	7.7	291.5	81.3	65.6	92.4	22	

NQR DIESEL

CREW CAB



GVWR/GCWR	17,950/23,950 lbs.
BODY/PAYLOAD ALLOWANCE	10,680-10,748 lbs.
GAWR	
Front	6,830 lbs.
Rear	12,980 lbs.
FRONT AXLE CAPACITY	6,830 lbs.
REAR AXLE CAPACITY	14,550 lbs.
Ratio	5.125
SUSPENSION F/R SPRINGS	Tapered/Multi-Leaf
Capacity	8,440/14,550 lbs.
FRAME	
Section Modulus	11.89 in. ³
Resistance Bending Moment	523,160 lb.-in.
SERVICE BRAKES	Hydraulic Boosted with
Front/Rear	4-Channel ABS Disc/Drum
EXHAUST BRAKE	Standard
TRANSMISSION	Aisin A465id 6-speed auto.
	with double overdrive
	and lock-up 2 nd -6 th gears
ENGINE	Isuzu 4HK1-TC turbocharged
	intercooled diesel
Displacement	5.2L (317 in. ³)
Engine Power	215 hp @ 2,500 rpm
Engine Torque	452 lb.-ft. @ 1,850 rpm
OIL LEVEL INDICATOR	Dash-mounted oil level
	check switch and light
LIMITED SLIP DIFFERENTIAL	Optional
ALTERNATOR	140-amp
BATTERIES	2 Maintenance-Free
	750-CCA
TIRES LRR (Low Rolling Resistance)	225/70R19.5F (12-pr) Standard
STEERING	Integral Hydraulic Power
STEERING COLUMN	Tilt and Telescopic
FUEL TANK	
Standard	30 gal. in-rail
FUEL/WATER SEPARATOR	Dual fuel filter with dash
	mounted indicator light

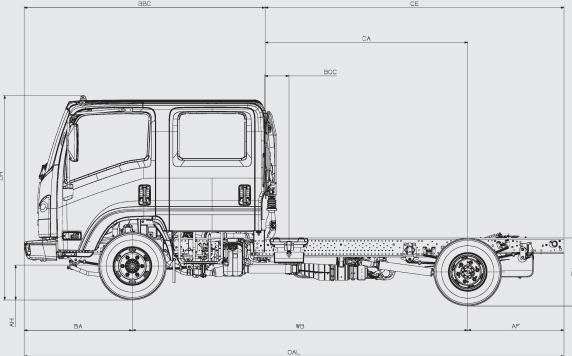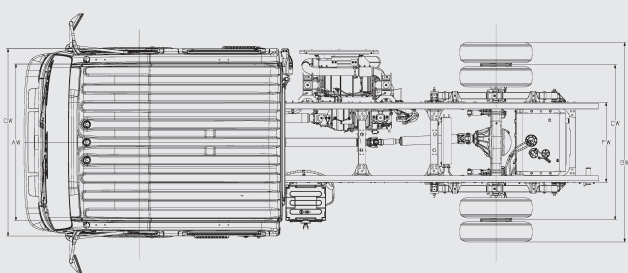



NQR DIESEL CREW CAB									
Wheelbase (in.)	Cab to Axle (in.)	Cab to End of Frame (in.)	Back of Cab (in.)	Overall Length (in.)	Overall Width (in.)	Axle Width (in.)	Overall Height (in.)	Body Length (ft.)	
150.0	88.5	131.6	5.3	241.5	81.3	65.6	92.4	12	
176.0	114.5	157.6	5.3	267.5	81.3	65.6	92.4	16	

NRR DIESEL

STANDARD CAB



GVWR/GCWR	19,500/25,500 lbs.
BODY/PAYLOAD ALLOWANCE	12,294-12,875 lbs.
GAWR	
Front	7,275 lbs.
Rear	13,660 lbs.
FRONT AXLE CAPACITY	7,275 lbs.
REAR AXLE CAPACITY	14,550 lbs.
Ratio	5.571
SUSPENSION F/R SPRINGS	Tapered/Multi-Leaf
Capacity	8,440/14,550 lbs.
FRAME	
Section Modulus	7.20 in. ³
Resistance Bending Moment	316,800 lb.-in.
SERVICE BRAKES	Hydraulic Boosted with
Front/Rear	4-Channel ABS Disc/Drum
EXHAUST BRAKE	Standard
TRANSMISSION	Aisin A465Id 6-speed auto.
	with double overdrive
	and lock-up 2 nd -6 th gears
ENGINE	Isuzu 4HK1-TC turbocharged
	intercooled diesel
Displacement	5.2L (317 in. ³)
Engine Power	215 hp @ 2,500 rpm
Engine Torque	452 lb.-ft. @ 1,850 rpm
OIL LEVEL INDICATOR	Dash-mounted oil level
	check switch and light
LIMITED SLIP DIFFERENTIAL	Optional
ALTERNATOR	140-amp
BATTERIES	2 Maintenance-Free
	750-CCA
TIRES LRR (Low Rolling Resistance)	225/70R19.5F (12-pr) Standard
STEERING	Integral Hydraulic Power
STEERING COLUMN	Tilt and Telescopic
FUEL TANK	
Standard	30 gal. in-rail
Optional	33 gal. side mount
	(176" WB Only)
FUEL/WATER SEPARATOR	Dual fuel filter with dash
	mounted indicator light

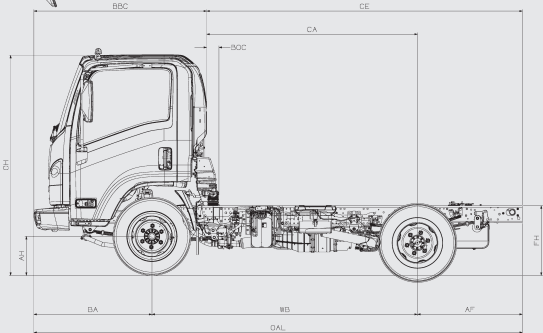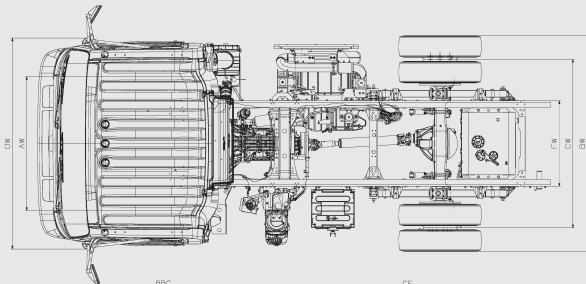



NRR									
Wheelbase (in.)	Cab to Axle (in.)	Cab to End of Frame (in.)	Back of Cab (in.)	Overall Length (in.)	Overall Width (in.)	Axle Width (in.)	Overall Height (in.)	Body Length (ft.)	
109.0	86.5	129.6	7.7	200.5	81.3	65.6	92.4	10-12	
132.5	110.0	153.1	7.7	224.0	81.3	65.6	92.4	14	
150.0	127.5	170.6	7.7	241.5	81.3	65.6	92.4	16-18	
176.0	153.5	196.6	7.7	267.5	81.3	65.6	92.4	18-20	
200.0	177.5	220.6	7.7	291.5	81.3	65.6	92.4	22	
212.0	189.5	232.6	7.7	303.5	81.3	65.6	92.4	24	

NRR DIESEL

CREW CAB



GVWR/GCWR	19,500/25,500 lbs.
BODY/PAYLOAD ALLOWANCE	12,181-12,250 lbs.
GAWR	
Front	7,275 lbs.
Rear	13,660 lbs.
FRONT AXLE CAPACITY	7,275 lbs.
REAR AXLE CAPACITY	14,550 lbs.
Ratio	5.571
SUSPENSION F/R SPRINGS	Tapered/Multi-Leaf
Capacity	8,440/14,550 lbs.
FRAME	
Section Modulus	11.89 in. ³
Resistance Bending Moment	523,160 lb.-in.
SERVICE BRAKES	Hydraulic Boosted with
Front/Rear	4-Channel ABS Disc/Drum
EXHAUST BRAKE	Standard
TRANSMISSION	Aisin A465Id 6-speed auto.
	with double overdrive
	and lock-up 2 nd -6 th gears
ENGINE	Isuzu 4HK1-TC turbocharged
	intercooled diesel
Displacement	5.2L (317 in. ³)
Engine Power	215 hp @ 2,500 rpm
Engine Torque	452 lb.-ft. @ 1,850 rpm
OIL LEVEL INDICATOR	Dash-mounted oil level
	check switch and light
LIMITED SLIP DIFFERENTIAL	Optional
ALTERNATOR	140-amp
BATTERIES	2 Maintenance-Free
	750-CCA
TIRES LRR (Low Rolling Resistance)	225/70R19.5F (12-pr) Standard
STEERING	Integral Hydraulic Power
STEERING COLUMN	Tilt and Telescopic
FUEL TANK	
Standard	30 gal. in-rail
FUEL/WATER SEPARATOR	Dual fuel filter with dash
	mounted indicator light

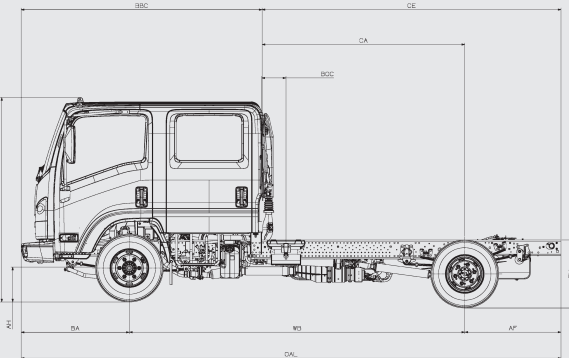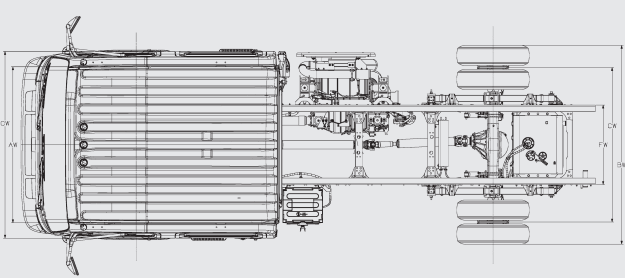


NRR DIESEL CREW CAB									
Wheelbase (in.)	Cab to Axle (in.)	Cab to End of Frame (in.)	Back of Cab (in.)	Overall Length (in.)	Overall Width (in.)	Axle Width (in.)	Overall Height (in.)	Body Length (ft.)	
150.0	88.5	131.6	5.3	241.5	81.3	65.6	92.4	12	
176.0	114.5	157.6	5.3	267.5	81.3	65.6	92.4	16	



ISUZU LOW CAB FORWARD DESIGN; BENEFITS EVERY OWNER CAN APPRECIATE

COMPARED TO CONVENTIONAL CAB TRUCKS, VANS AND CUTAWAYS, THE ISUZU LOW CAB FORWARD DESIGN ACCOMMODATES BODIES 10-24 FT. AND DELIVERS:

- Lower cost of ownership
- More available cargo space on the same wheelbase
- Durable diesel and gas powertrains with exceptional B10 ratings and high-mileage design lives
- Easy access to the engine compartment with a tilt-cab design
- Remarkable maneuverability with 49.5 degree wheel-cut angle for tighter turning
- Easy entry and exit with 85 degree door swing, grab handles, and entry step
- Outstanding visibility allowing you to see the ground within 8 ft. in front of truck
- Better fuel economy
- GVWRs from 12,000 to 19,500 lbs.
- Multiple powertrain options:
 - 5.2L diesel engine
 - Gas engine (CNG or LPG Capable)

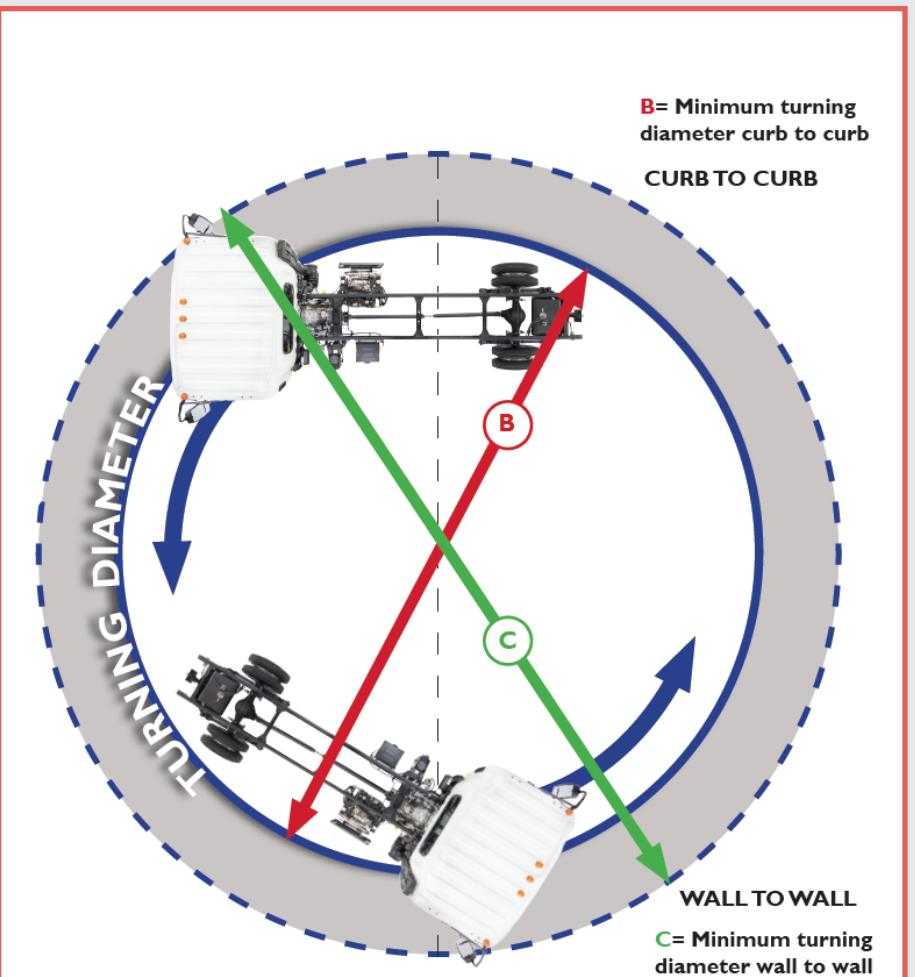

OPTIONAL FEATURES

DESIGNED TO MAXIMIZE COMFORT, EFFICIENCY
AND PRODUCTIVITY



SUSPENSION DRIVER SEAT



HEATED REMOTE CONTROL MIRRORS



VERTICAL EXHAUST



LOCKING DEF CAP



KEYLESS ENTRY



REMOTE MIRROR CONTROLS



AIR DEFLECTOR



SEAT COVERS SHOWN



ADDITIONAL FUEL TANK