FN330

FUSO

Easy-going personality. Hard-working design.

5





2005 MITSUBISHI FUSO



2005 MITSUBISHI FUSO







FM330: Strength your company can build on.


The largest payloads call for stronger frames, big power and lots of torque. Mitsubishi Fuso's FM330 model offers all three in abundance. Its rugged ladder-style frame with web-mounted crossmembers can handle bodies up to 28'. Its fuel-injected, intercooled, turbocharged 6-cylinder diesel engine delivers day-in day-out dependability and is easy to maintain. The FM330's cab is most accommodating with a 6-way adjustable driver's suspension seat, tilt/telescoping steering wheel, superior wide-angle visibility and a fully trimmed interior that's exceptionally roomy and quiet. Mitsubishi Fuso cabovers work harder for your business. And the FM330's productivity comes up big, every time.

 Available Allison[®] 6-speed automatic transmission with improved shifter

- Open-grate steps for safe entry/exit
- Contoured, color-coordinated front bumper
- Fixed console between seats with cup holders





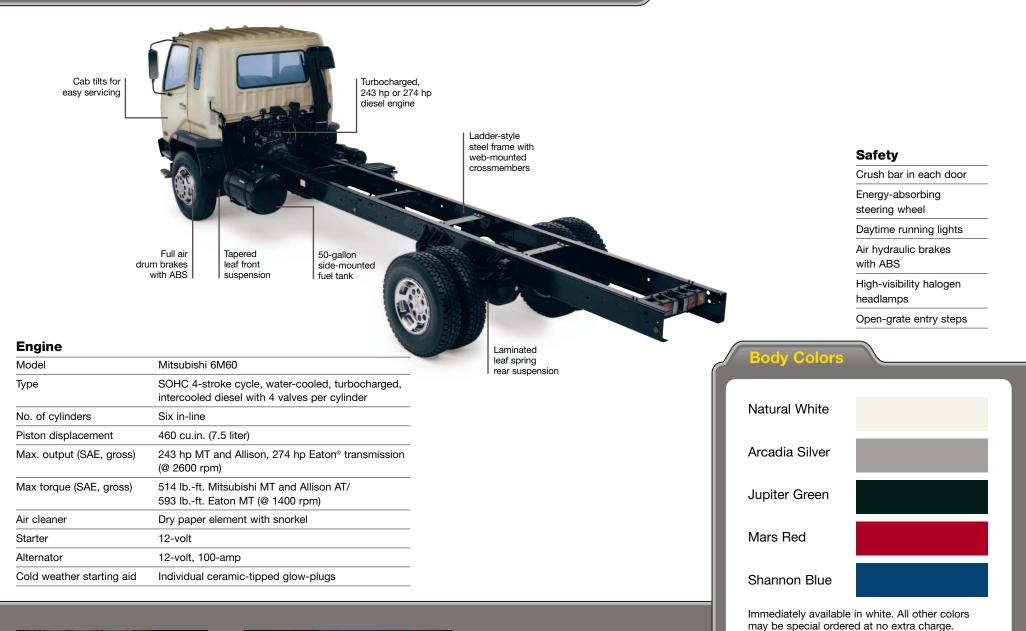






Blue and Gray Cloth



FM330 Specifications

| Chassis | | | | | | |
|-----------------------------|---|--|--|--|--|--|
| Clutch | Cerametallic | | | | | |
| Clutch size | 15" | | | | | |
| Transmission | | | | | | |
| Standard transmission | Mitsubishi 6-speed Direct MT | | | | | |
| Optional transmissions | Allison [®] MD 3060 Electronic 6-speed OD AT | | | | | |
| | or Eaton [®] 9-speed Direct MT | | | | | |
| Estimated top speed (mph) | 74 Mitsubishi MT/67 Allison AT/77 Eaton MT | | | | | |
| Axles | | | | | | |
| Front | Reverse Elliot, I-beam type, 11,905-lb. capacity | | | | | |
| Rear | Full floating type, 22,485-lb. capacity | | | | | |
| Final reduction gear | Single-reduction hypoid gear | | | | | |
| Ratio | 5.857 Mitsubishi MT/6.666 Allison AT/4.222 Eaton MT | | | | | |
| Curb weight base model | 10,220 lb. (Eaton transmission only) | | | | | |
| Turning diameter (short WB) | 43.4 ft. | | | | | |
| Tires (premium) | Single front, dual rear | | | | | |
| Size | 11R22.5 14PR Highway/Traction | | | | | |
| Disc wheel | 22.5" x 7.5"/8-lug | | | | | |
| Stooring | | | | | | |
| Steering | Ball-nut-type with integral-type hydraulic power booster Tilt/telescoping steering column with steering lock | | | | | |
| Cruise control | Standard | | | | | |
| Windows/door locks | Power | | | | | |
| Suspension | | | | | | |
| Front | Tapered leaf springs | | | | | |
| Rear | Laminated leaf springs | | | | | |
| Brakes | | | | | | |
| Service | Full air drum with ABS | | | | | |
| Parking | Spring brakes on rear axle | | | | | |
| Exhaust | Air actuated | | | | | |
| Frame | | | | | | |
| Туре | Ladder/straight | | | | | |
| Section modulus | 16.96 cu.in. | | | | | |
| Yield strength | 51,200 psi | | | | | |
| RBM per rail | 868,352 lbin. | | | | | |
| Height/width | 42.3"/33.1" | | | | | |
| Fuel tank | 50-gallon side mount | | | | | |
| Electrical system | Two 12-volt, maintenance-free batteries – 799 CCA EA | | | | | |
| Vehicle safety | Energy-absorbing steering wheel, crush bars in doors, daytime running lights and ABS standard | | | | | |

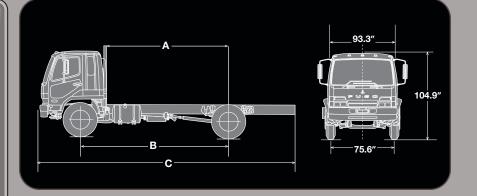

Dimensions

| A. Usable cab to rear | axle | 109. | 6" | 146. | 7" | 164.8 | B" | 183.3 | 8" | 204.1" |
|------------------------|------------|-------|-----|------|-----|-------|-----|-------|----|--------|
| B. Wheelbase | Eaton only | /144. | 9" | 181. | 9" | 200. | 0" | 218.5 | 5" | 239.4" |
| C. Overall length (end | of frame) | 260. | 8" | 312. | 8" | 339.0 | 6" | 367.1 | " | 408.5" |
| Body size accommo | dated | 14' | 16' | 18' | 20' | 22' | 24' | 26' | 28 | |

Weight (lb.)*

| GVWR (lb.)/GAWR (lb.) | 32,900 | Front 11,700 | Rear 21,200 |
|----------------------------------|----------|-------------------|-----------------------|
| GCWR (lb.) MT/AT | 48,000 M | lit MT and Alliso | on AT/55,100 Eaton MT |
| Max. body-payload capacity (lb.) | 22,680 | | |

*Weight approximate. See dealer for details.



MITSUBISHI FUSO TRUCK OF AMERICA, Inc.

2015 Center Square Road Logan Twp., NJ 08085

For the dealer nearest you, or for more information, visit our web site at: www.mitfuso.com

Vehicle specifications are subject to change without notice. Photos and descriptions included on this spec sheet may vary in comparison to actual vehicle models.

Allison is a registered trademark of General Motors Corporation. Eaton is a registered trademark of Eaton Corporation.

PRINTED IN THE U.S.A. ON RECYCLED AND RECYCLABLE PAPER 6/04. ©2004 MITSUBISHI FUSO TRUCK OF AMERICA, Inc.