

MITSUBISHI FUSO



FE145
CREW CAB

MOST SPACIOUS:
4 DOORS AND
ROOM FOR **7**.





FE145 CREW CAB SPECIFICATIONS

THE INDUSTRY'S MOST DEPENDABLE CABOVERS carry the industry's best warranty — ours. It combines three-part protection for your FE investment. That includes limited 3-Year vehicle bumper-to-bumper/unlimited mileage; limited 4-Year warranty against rust-through, and a 5-Year/175,000-Mile limited Powertrain warranty that also covers bolt-ons such as turbochargers, starter motors and alternators. See your dealer for complete details on Mitsubishi Fuso's best-in-industry warranty.



CHASSIS

Transmission	Standard	Aisin Electronic 6-speed OD AT
	Optional	n/a
	Estimated top speed (mph)	75
Axles	Front	Reverse Elliot, I-beam type, 5,510-lb. capacity
	Rear	Full floating type, 9,920-lb. capacity
Final reduction gear	Type	Single-reduction hypoid
	Ratio	5.285
Curb weight base model	6,435 lb. (est.)	
Turning diameter	48.2 ft.	
Tires (premium)	Single front, dual rear	
	Size	215/85R16 10PR All-season all positions
Disc wheel	16" x 6"/6-lug	
Steering	Ball-nut-type with integral-type hydraulic power booster	
	Tilt/telescoping steering column with steering lock	
Windows/door locks	Manual	
Suspension	Front	Laminated leaf springs with shock absorbers and stabilizer bar
	Rear	Laminated leaf springs with shock absorbers and stabilizer bar
Brakes	Service	Dual-caliper disc, hydraulic-type w/ vacuum servo assist w/ ABS
	Parking	Drum/driveline, internal expanding shoe
	Exhaust	Vacuum actuated
Frame	Type	Ladder/tapered
	Section modulus	8.45 cu. in.
	Yield strength	44,000 psi
	RBM per rail	371,800 lb.-in.
Fuel tank	33-gallon side mount	
Electrical system	Two 12-volt, maintenance-free batteries – 799 CCA each	
Vehicle safety	Energy-absorbing steering wheel, crush bars in doors, daytime running lights and ABS standard	

MITSUBISHI FUSO

SAFETY

Crush bar in front doors

Energy-absorbing steering wheel

Daytime running lights

Dual-caliper disc brakes with ABS, all wheels

High-visibility halogen headlamps

Covered, open-grate entry steps

“Wet arm” 3-speed windshield wipers

Forward swing doors for easy, safe entry



Storage area under rear seats



Dash-mounted shifter maximizes leg room




Comfortable cab with ample room for 7



Doghouse engine access under front seats

BODY COLORS



Natural White



Jupiter Green



Mars Red



Shannon Blue

All models are available immediately in white. Other colors may be special ordered at no extra charge.


FABRIC STYLE



Blue Vinyl

ENGINE

Model	Mitsubishi 4M50
Type	DOHC 4-stroke cycle, water-cooled, turbocharged, intercooled diesel with 4 valves per cylinder and dual balance shafts
No. of cylinders	Four in-line
Piston displacement	299.0 cu. in. (4.9 liter)
Max. output (SAE, gross)	185 hp @ 2700 rpm
Max. torque (SAE, gross)	391 lb.-ft. @ 1600 rpm
Air cleaner	Dry paper element with snorkel
Starter	12-volt
Alternator	12-volt, 100-amp
Cold weather starting aid	Individual ceramic-tipped glow-plugs

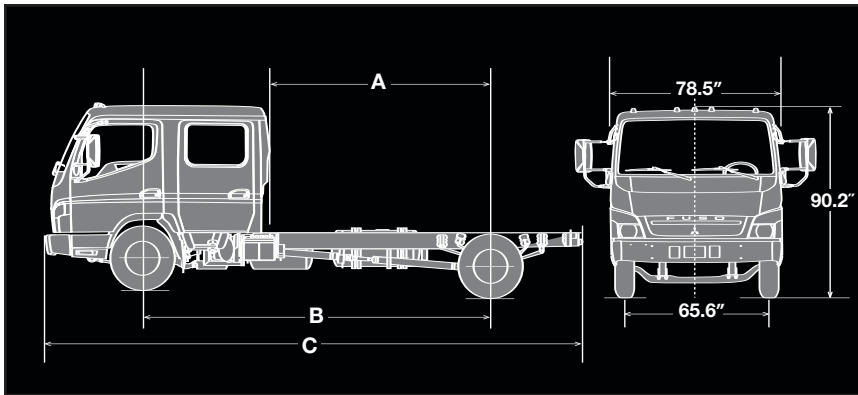

DIMENSIONS

A. Usable cab to rear axle	103.4"
B. Wheelbase	165.4"
C. Overall length (end of frame)	254.3"
Body size accommodated	14' 16'

WEIGHT (LB.)*

GVWR/GAWR	14,500	Front 5,360	Rear 9,880
GCWR	19,503		
Max. body-payload capacity	8,065		

*Weight approximate. See dealer for details.



MITSUBISHI FUSO
TRUCK OF AMERICA, Inc.
2015 Center Square Road
Logan Township, NJ 08085

For the dealer nearest you,
or for more information,
visit our web site at:
www.mitfuso.com



Vehicle specifications are subject to change without notice. Photos and descriptions included in this spec sheet may vary in comparison to actual vehicle models.
For warranty limitations and details, see your local dealer. PRINTED IN THE U.S.A. ON RECYCLED AND RECYCLABLE PAPER 4/08. ©2008 MITSUBISHI FUSO TRUCK OF AMERICA, Inc.