

MITSUBISHI FUSO



FG140_{4X4}

IT'S GOT YOUR
DRIVE AT ALL
FOUR WHEELS.





FG140 4X4 SPECIFICATIONS

THE INDUSTRY'S MOST DEPENDABLE CABOVERS carry the industry's best warranty — ours. It combines three-part protection for your FG investment. That includes limited 3-Year vehicle bumper-to-bumper/unlimited mileage; limited 4-Year warranty against rust-through, and a 5-Year/175,000-Mile limited Powertrain warranty that also covers bolt-ons such as turbochargers, starter motors and alternators. See your dealer for complete details on Mitsubishi Fuso's best-in-industry warranty.



CHASSIS

Clutch	Type Size	Organic 12.8"
Transmission	Standard Optional Estimated top speed (mph)	Mitsubishi 5-speed OD MT w/2-speed transfer case n/a 68
Axles	Front Rear	Full floating type, 5,730-lb. capacity Full floating type, 9,480-lb. capacity
Final reduction gear	Type Ratio	Single-reduction hypoid 4.875 MT
Curb weight base model	6,035 lb. (est.)	
Turning diameter	46.0 ft.	
Tires (premium)	Single front, dual rear Size	235/85R16 10PR Traction all positions
Disc wheel	16" x 6"/6-lug	
Steering	Ball-nut-type with integral-type hydraulic power booster Tilt/telescoping steering column with steering lock	
Windows/door locks	Power	
Suspension	Front Rear	Laminated leaf springs with shock absorbers Laminated leaf springs with shock absorbers
Brakes	Service Parking Exhaust	Drum, hydraulic-type w/ vacuum servo assist w/ ABS Drum/driveline, internal expanding shoe Vacuum actuated
Frame	Type Section modulus Yield strength RBM per rail Height/width	Ladder/drop/tapered 6.95 cu. in. 44,000 psi 305,800 lb.-in. 32.4"/29.5"
Fuel tank	33-gallon side mount	
Electrical system	Two 12-volt, maintenance-free batteries – 799 CCA each	
Vehicle safety	Energy-absorbing steering wheel, crush bars in doors, daytime running lights and ABS standard	

MITSUBISHI FUSO



3-speed wet arm
windshield wipers



Dash-mounted shifter
maximizes legroom

SAFETY

Crush bar in each door

Energy-absorbing steering wheel

Daytime running lights

ABS hydraulic, self-adjusting drum
brakes, all wheels

High-visibility halogen headlamps

Covered, open-grate entry steps

“Wet arm” 3-speed windshield wipers

Forward swing doors for easy, safe entry



Folding-seat workstation
plus added storage.




Covered,
open-grate
front steps
stay cleaner

BODY COLORS



Arcadia Silver



Natural White



Jupiter Green



Mars Red



Shannon Blue

All models are available immediately in white.
Other colors may be special ordered at no extra charge.


ENGINE

Model	Mitsubishi 4M50
Type	DOHC 4-stroke cycle, water-cooled, turbocharged, intercooled diesel
No. of cylinders	Four in-line
Piston displacement	299.0 cu. in. (4.9 liter)
Max. output (SAE, gross)	155 hp @ 2700 rpm
Max. torque (SAE, gross)	347 lb.-ft. @ 1600 rpm
Air cleaner	Dry paper element with snorkel
Starter	12-volt
Alternator	12-volt, 100-amp
Cold weather starting aid	Individual ceramic-tipped glow-plugs

FABRIC STYLE



Blue and Gray
Cloth

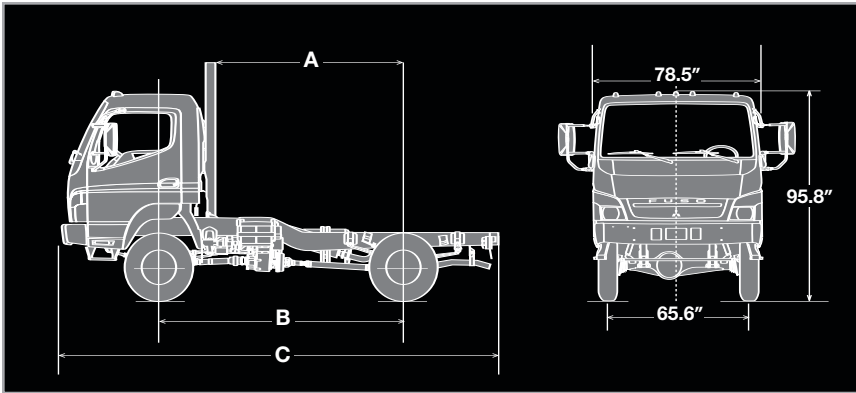

DIMENSIONS

A. Usable cab to rear axle	108.5"
B. Wheelbase	138.2"
C. Overall length (end of frame)	225.0"
Body size accommodated	14' 16'

WEIGHT (LB.)*

GVWR/GAWR	14,050	Front 5,730	Rear 9,480
GCWR	17,045		
Max. body-payload capacity	8,015		

*Weight approximate. See dealer for details.



MITSUBISHI FUSO
TRUCK OF AMERICA, Inc.
2015 Center Square Road
Logan Township, NJ 08085

For the dealer nearest you,
or for more information,
visit our web site at:
www.mitfuso.com



Vehicle specifications are subject to change without notice. Photos and descriptions included in this spec sheet may vary in comparison to actual vehicle models.
For warranty limitations and details, see your local dealer. PRINTED IN THE U.S.A. ON RECYCLED AND RECYCLABLE PAPER 4/08. ©2008 MITSUBISHI FUSO TRUCK OF AMERICA, Inc.