

FE



SPECIFICATIONS

WEIGHT (lbs.)

Max GVWR	11,600
Front	4,670
Rear	8,600
Body/Payload	Up to 6,650

DIMENSIONS (in.)

Wheelbase	108.3/131.9/148.0
Usable cab to rear axle	83.1/106.7/122.9
Overall length (End of frame)	192.3/215.7/231.9



ENGINE

Model	Mitsubishi 4D34-2AT3A
Type	4-stroke cycle, watercooled, direct injection, turbocharged, intercooled diesel
No. of cylinders	Four in-line
Piston displacement	238.0 cu. in. (3.9 liters)
Max. output (SAE, gross)	135 hp/3,000 rpm
Max. torque (SAE, gross)	253 lb.ft./1,800 rpm
Air cleaner	Dry paper element with snorkel and rain cap
Starter	12-volt
Alternator	12-volt, 80 amp.


CHASSIS

Clutch		Hydraulic control, 11.8 in., single dry plate
Transmission (Automatic option)		5 forward and 1 reverse speed, 2nd to 5th synchromesh, 1st and reverse constant mesh gears
	Ratio: manual	5.380/3.028/1.700/1.000/0.722, reverse 5.380
	Ratio: automatic	3.068/1.570/1.000/0.724, reverse 2.625
Axle	Front	Reverse Elliot, I-beam-type, 5,290 lbs. capacity
	Rear	Full-floating-type, 9,480 lbs. capacity
Final reduction gear		Single-reduction hypoid gear
	Ratio	5.714 (manual/automatic)
Tires		Single front steer, dual rear traction
	Size	LT215/85R16D (8 PR)
Steering		Ball-nut-type with integral-type hydraulic power booster. Telescopic and tilt steering column with steering lock
Suspension	Front	Laminated leaf springs with shock absorbers and stabilizer bar
	Rear	Laminated leaf springs with shock absorbers and stabilizer bar
Brakes	Service	Hydraulic with vacuum servo assist, front disc, self-adjusting rear drum
	Parking	Internal expanding shoe-type
Fuel tank		33 gallons
Electrical system		Two 12-volt, maintenance-free batteries
Cab		All-steel, tilt cab

FE

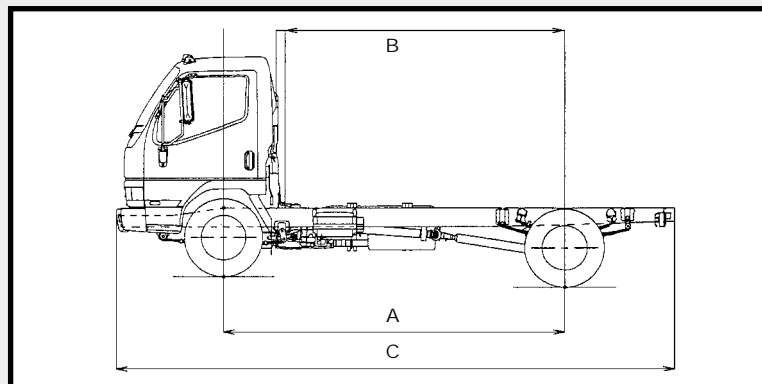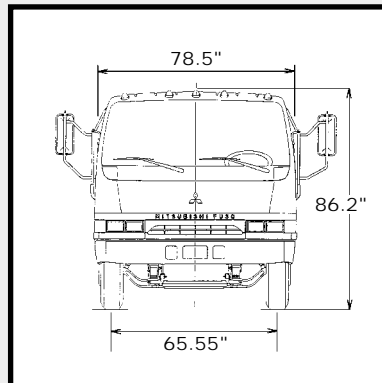

A. Wheelbase (in.)	108.3/131.9/148.0
B. Usable cab to rear axle (in.)	83.1/106.7/122.9
C. Overall length (in.)	192.3/215.7/231.9

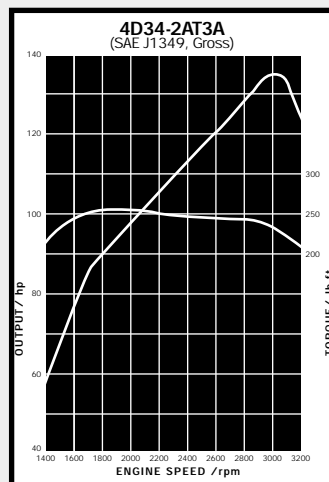

MITSUBISHI FUSO
TRUCK OF AMERICA, Inc.

P.O. Box 464, 100 Center Square Road
Bridgeport, NJ 08014

NOT AVAILABLE IN CALIFORNIA

Vehicle specifications are subject to
change without notice.

Photos and descriptions may vary in
comparison to actual vehicle models.

