

FK



SPECIFICATIONS

WEIGHT (LBS.)

Max GVWR	23,000
Front	7,200
Rear	15,800
Body/Payload	Up to 15,010

DIMENSIONS (IN.)

Wheelbase	163.8/175.6 (MT only) 187.4/200.8 (MT/AT)
Usable cab to rear axle	128.4/140.3/152.1/165.5
Overall length (End of frame)	285.2/302.4/319.2/341.3

ENGINE



Model	Mitsubishi 6D16-2AT3 (MT) 6D16-2AT4 (AT)
Type	4-stroke cycle, watercooled, direct injection, turbocharged, intercooled diesel
No. of cylinders	Six in-line
Piston displacement	460.3 cu. in. (7.5 liters)
Max. output (SAE, gross)	200 hp/2,600 rpm (MT) 190 hp/2,600 rpm (AT)
Max. torque (SAE, gross)	429 lb.ft./1,600 rpm (MT) 408 lb.ft./1,600 rpm (AT)
Air cleaner	Dry paper element with snorkel and rain cap
Starter	12-volt
Alternator	12-volt, 80 amp.

CHASSIS



Clutch		Hydraulic control, coil spring, 13.8 in. single dry cerametallic disc
Transmission (Automatic option)		5 forward and 1 reverse speed, 2nd to 5th synchromesh, 1st and reverse constant mesh gears
	Ratio: manual	6.875/4.189/2.460/1.542/1.000, reverse 6.875
	Ratio: automatic	(Allison AT542)* 3.454/2.253/1.407/1.000, reverse 5.024
Axle	Front	Reverse Elliot, I-beam-type, 7,275 lbs. capacity
	Rear	Full-floating-type, 16,975 lbs. capacity
Final reduction gear		Single-reduction hypoid gear
	Ratio	4.444 (MT) 4.625 (AT)
Tires		Single front, dual rear
	Size	Premium 9R22.5 (12PR)
Steering		Ball-nut-type with integral-type hydraulic power booster. Telescopic and tilt steering column with steering lock
Suspension	Front	Laminated leaf springs with shock absorbers
	Rear	Laminated leaf springs
Brakes	Service	Air-over hydraulic, self-adjusting air dryer standard (exhaust brake standard except automatic)
	Parking	Internal expanding-type on propeller shaft
Fuel tank		50-gallon tank and fuel/water separator (standard)
Electrical system		Two 12-volt, maintenance-free batteries
Cab		Tilt cab

*Allison does not approve the AT542 Transmission for use in refuse packers or one-way rental operations.

FK

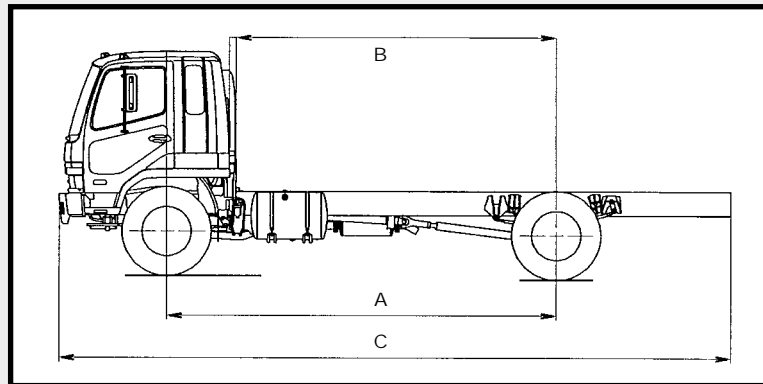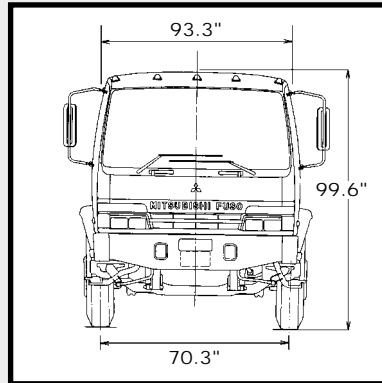

A. Wheelbase (in.)	163.8/175.6 (MT only) 187.4/200.8 (MT/AT)
B. Usable cab to rear axle (in.)	128.4/140.3/152.1/165.5
C. Overall length (in.)	285.2/302.4/319.2/341.3

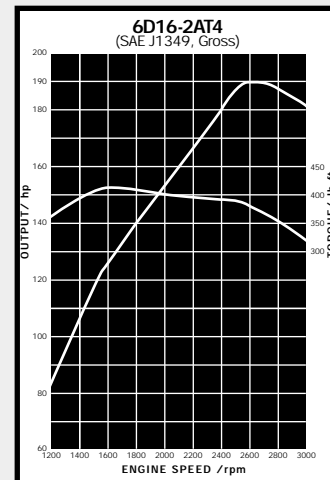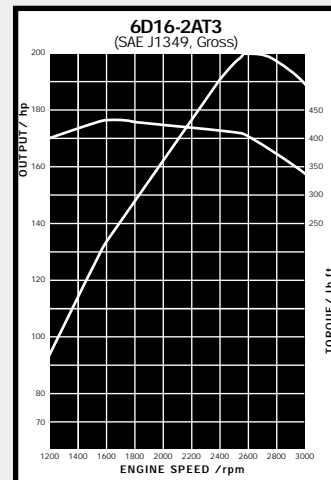

MITSUBISHI FUSO
TRUCK OF AMERICA, Inc.

P.O. Box 464, 100 Center Square Road
Bridgeport, NJ 08014

Vehicle specifications are subject to
change without notice.

Photos and descriptions may vary in
comparison to actual vehicle models.

