

FM•HR



1998



SPECIFICATIONS

WEIGHT (LBS.)

Max GVWR		30,000
	Front	10,640
	Rear	20,080
Body/Payload		Up to 20,620

DIMENSIONS (IN.)

Wheelbase	181.9 (MT only) 200.0/218.5/230.3 (MT/AT)
Usable cab to rear axle	146.6/164.7/183.2/195.0
Overall length (End of frame)	313.8/340.6/368.1/390.6



ENGINE

Model	Mitsubishi 6D16-2AT3 (MT) 6D16-2AT4 (AT)
Type	4-stroke cycle, watercooled, direct injection, turbocharged, intercooled diesel
No. of cylinders	Six in-line
Piston displacement	460.3 cu. in. (7.5 liters)
Max. output (SAE, gross)	200 hp/2,600 rpm (MT) 190 hp/2,600 rpm (AT)
Max. torque (SAE, gross)	429 lb.ft./1,600 rpm (MT) 408 lb.ft./1,600 rpm (AT)
Air cleaner	Dry paper element with snorkel and rain cap
Starter	12-volt
Alternator	12-volt, 80 amp.

CHASSIS

Clutch		Hydraulic control, coil spring 13.8 in. single cerametallic disc
Transmission (Automatic option)		6 forward and 1 reverse speed, 2nd to 6th synchromesh, 1st and reverse constant mesh gears
	Ratio: 6-speed OID	6.875/4.189/2.460/1.542/1.000/0.786, reverse 6.875
	Ratio: automatic	(Allison AT545) 3.454/2.253/1.407/1.000, reverse 5.571
Axle	Front	Reverse Elliot, I-beam-type, 10,640 lbs. capacity
	Rear	Full-floating-type, 20,080 lbs. capacity
Final reduction gear		Single-reduction hypoid gear
	Ratio	6.166 (MT) 5.571 (AT)
Tires		Single front, dual traction rear
	Size	Premium 11R22.5 (14PR)
Steering		Ball-nut-type with integral-type hydraulic power booster. Telescopic and tilt steering column with steering lock
Suspension	Front	Laminated leaf springs with shock absorbers
	Rear	Laminated leaf springs
Brakes	Service	Air-over hydraulic, self-adjusting air dryer standard (exhaust brake standard except automatic)
	Parking	Internal expanding-type on propeller shaft
Fuel tank		50-gallon tank and fuel/water separator (standard)
Electrical system		Two 12-volt, maintenance-free batteries
Cab		Tilt cab

FM•HR

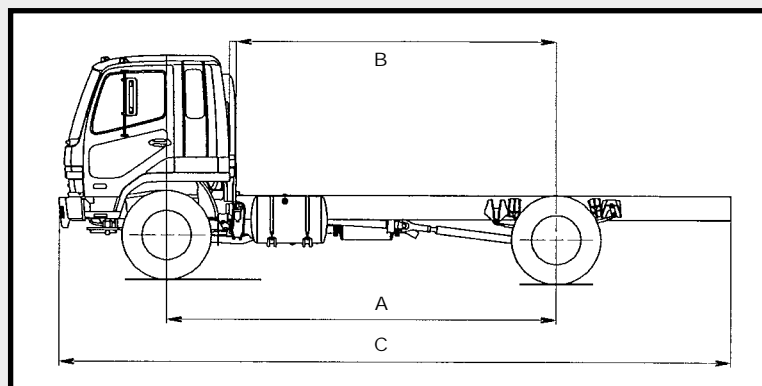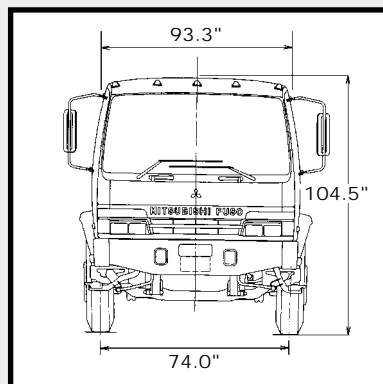

A. Wheelbase (in.)	181.9 (MT only) 200.0/218.5/230.3 (MT/AT)
B. Usable cab to rear axle (in.)	146.6/164.7/183.2/195.0
C. Overall length (in.)	313.8/340.6/368.1/390.6

MITSUBISHI FUSO
TRUCK OF AMERICA, Inc.

P.O. Box 464, 100 Center Square Road
Bridgeport, NJ 08014

Vehicle specifications are subject to
change without notice.

Photos and descriptions may vary in
comparison to actual vehicle models.

