

# FE·SP



1998



## SPECIFICATIONS

### WEIGHT (LBS.)

Max GVWR	14,500
Front	5,360
Rear	9,880
Body/Payload	Up to 9,450

### DIMENSIONS (IN.)

Wheelbase	108.3/131.9/148.0
Usable cab to rear axle	83.1/106.7/122.9
Overall length (End of frame)	192.3/215.7/231.9



### ENGINE

Model	Mitsubishi 4D34-2AT3B
Type	4-stroke cycle, watercooled, direct injection, turbocharged, intercooled diesel
No. of cylinders	Four in-line
Piston displacement	238.0 cu. in. (3.9 liters)
Max. output (SAE, gross)	145 hp/2,900 rpm
Max. torque (SAE, gross)	275 lb.ft./1,600 rpm
Air cleaner	Dry paper element with snorkel and rain cap
Starter	12-volt
Alternator	12-volt, 80 amp.


### CHASSIS

Clutch		Hydraulic control, 11.8 in., single dry plate
Transmission (Automatic option)		5 forward and 1 reverse speed, 2nd to 5th synchromesh, 1st and reverse constant mesh gears
	Ratio: manual	5.380/3.028/1.700/1.000/0.722, reverse 5.380
	Ratio: automatic	2.784/1.544/1.000/0.694, reverse 2.275
Axle	Front	Reverse Elliot, I-beam-type, 5,510 lbs. capacity
	Rear	Full-floating-type, 9,980 lbs. capacity
Final reduction gear		Single-reduction hypoid gear
	Ratio	5.714 (manual/automatic)
Tires		Single front steer, dual rear traction
	Size	LT215/85R16E (10 PR)
Steering		Ball-nut-type with integral-type hydraulic power booster. Telescopic and tilt steering column with steering lock
Suspension	Front	Super Heavy-Duty laminated leaf springs with shock absorbers and stabilizer bar
	Rear	Super Heavy-Duty laminated leaf springs with shock absorbers and stabilizer bar
Brakes	Service	Hydraulic with vacuum servo assist, four-wheel disc
	Parking	Internal expanding shoe-type
Fuel tank		33 gallons
Electrical system		Two 12-volt, maintenance-free batteries
Cab		All-steel, tilt cab

# FE·SP

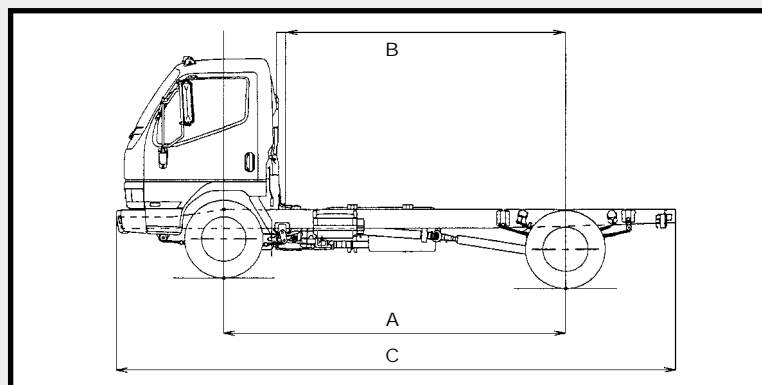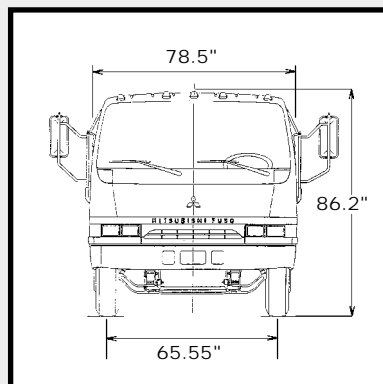

A. Wheelbase (in.)	108.3/131.9/148.0
B. Usable cab to rear axle (in.)	83.1/106.7/122.9
C. Overall length (in.)	192.3/215.7/231.9

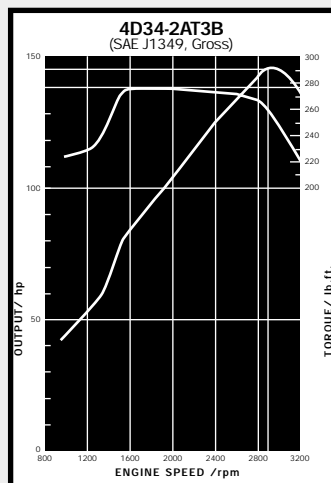

MITSUBISHI FUSO  
TRUCK OF AMERICA, Inc.

P.O. Box 464, 100 Center Square Road  
Bridgeport, NJ 08014

Vehicle specifications are subject to  
change without notice.

Photos and descriptions may vary in  
comparison to actual vehicle models.

