SPECIFICATIONS



WEIGHT (LBS.)

Max GVWR		32,900	
	Front	11,700	
	Rear	21,200	
Body/Payload		Up to 22,890	

DIMENSIONS (IN.)

Wheelbase	181.9/200.0/218.5/230.3
Usable cab to rear axle	146.6/164.7/183.2/195.0
Overall length (End of frame)	313.8/340.6/368.1/390.6


ENGINE


Mitsubishi 6D16-2AT3
4-stroke cycle, watercooled, direct injection,
turbocharged, intercooled diesel
Six in-line
460.3 cu. in. (7.5 liters)
200 hp/2,600 rpm
429 lb.ft./1,600 rpm
Dry paper element with snorkel and rain cap
12-volt
12-volt, 80 amp.

CHASSIS

Clutch		Hydraulic control, coil spring 13.8 in., single cerametallic disc
Transmission		6 forward and 1 reverse speed, 2nd to 6th synchromesh,
		1st and reverse constant mesh gears
	Ratio: 6-speed OID	6.875/4.189/2.460/1.542/1.000/0.786, reverse 6.875
Axle	Front	Reverse Elliot, I-beam-type, 11,905 lbs. capacity
	Rear	Full-floating-type, 22,485 lbs. capacity
Final reduction gear		Single-reduction hypoid gear
	Ratio	6.166 (6-speed)
Tires		Single front, dual rear
	Size	Premium 11R22.5 (14PR)
Wheel		7.50x22.5-162-12t, 10-stud, 1-piece disc wheel
Steering		Ball-nut-type with integral-type hydraulic power booster.
		Telescopic and tilt steering column with steering lock
Suspension	Front	Laminated leaf springs with shock absorbers
	Rear	Laminated leaf springs
Spring capacity	Front	11,900
	Rear	23,810
Brakes	Service	Full air, air dryer standard, auto slack adjusters
		(exhaust brake standard)
	Parking	Spring-loaded-type on rear wheels
Fuel tank		50-gallon tank and fuel/water separator (standard)
Electrical system		Two 12-volt, maintenance-free batteries
Cab		Tilt cab

FM·SR



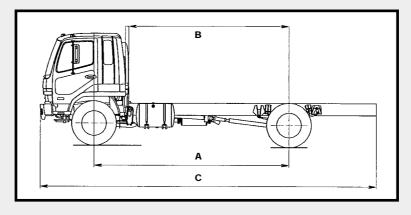

- TRUCK OF AMERICA, Inc.

MITSUBISHI FUSO

P.O. Box 464, 100 Center Square Road Bridgeport, NJ 08014

Vehicle specifications are subject to change without notice.

Photos and descriptions may vary in comparison to actual vehicle models.

MITSUBISHI **FUSO**

- A. Wheelbase (in.)
- **B.** Usable cab to rear axle (in.) 146.6/164.7/183.2/195.0
- C. Overall length (in.)

181.9/200.0/218.5/230.3

313.8/340.6/368.1/390.6

