



FM·SP



1 9 9 9

SPECIFICATIONS

Weight (lbs.)

| | |
|---------------------|--------------|
| Max GVWR | 32,900 |
| Front | 11,700 |
| Rear | 21,200 |
| Body/Payload | Up to 22,670 |

Dimensions (in.)

| | |
|--------------------------------------|-------------------------|
| Wheelbase | 181.9/200.0/218.5/239.4 |
| Usable cab to rear axle | 146.6/164.7/183.2/203.7 |
| Overall length (End of frame) | 313.8/340.6/368.1/409.5 |

Engine

| | |
|---------------------------------|---|
| Model | Mitsubishi 6D16-2AT2 |
| Type | 4-stroke cycle, watercooled, direct injection, turbocharged, intercooled diesel |
| No. of cylinders | Six in-line |
| Piston displacement | 460.3 cu. in. (7.5 liters) |
| Max. output (SAE, gross) | 230 hp/2,600 rpm |
| Max. torque (SAE, gross) | 521 lb.ft./1,600 rpm |
| Air cleaner | Dry paper element with snorkel and rain cap |
| Starter | 12-volt |
| Alternator | 12-volt, 80-amp |

Chassis

| | |
|-----------------------------|--|
| Clutch | Hydraulic control, coil spring 15.0 in., single cerametallic disc |
| Transmission | 6 forward and 1 reverse speed, 2nd to 6th synchromesh, 1st and reverse constant mesh gears (10-speed optional) |
| Ratio: 6-speed | 8.064/5.443/3.064/1.824/1.321/1.000, reverse 7.354 |
| Ratio: 10-speed | (10.060/7.767) (5.894/4.551) (3.466/2.676) (2.055/1.587)(1.295/1.000) reverse (10.002/7.722) |
| Axle | Front Reverse Elliot, I-beam-type, 11,905 lbs. capacity |
| Rear | Full-floating-type, 22,485 lbs. capacity |
| Final reduction gear | Single-reduction hypoid gear |
| Ratio | 4.625 (6 and 10 speed) |
| Tires | Single front, dual rear |
| Size | Premium 11R22.5 (14PR) |
| Steering | Ball-nut-type with integral-type hydraulic power booster. Telescopic and tilt steering column with steering lock |
| Suspension | Front Laminated leaf springs with shock absorbers |
| Rear | Laminated leaf springs |
| Spring capacity | Front 11,900 |
| Rear | 23,810 |
| Brakes | Service Full air, air dryer standard, auto slack adjusters with anti-lock (exhaust brake standard) |
| Parking | Spring-loaded-type on rear wheels |
| Fuel tank | 50-gallon tank and fuel/water separator (standard) |
| Electrical system | Two 12-volt, maintenance-free batteries |
| Cab | Tilt cab |



FM•SP


MITSUBISHI FUSO TRUCK
OF AMERICA, Inc.
P.O. Box 464
100 Center Square Road
Bridgeport, NJ 08014

For the dealer nearest you,
or for more information, write
or call: 1 (800) 648-3876

Or visit our web site at
<http://www.mitfuso.com>

Vehicle specifications are subject to change
without notice. Photos and descriptions included
in this brochure may vary in comparison to
actual vehicle models.

♻️ PRINTED IN THE U.S.A. ON RECYCLED AND
RECYCLABLE PAPER 4/98. ©1998 MITSUBISHI FUSO
TRUCK OF AMERICA, INC.

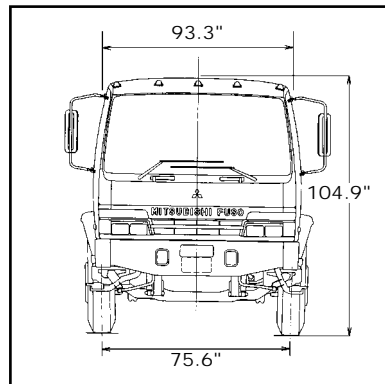

- A. Wheelbase (in.)
181.9/200.0/218.5/239.4
- B. Usable cab to rear axle (in.)
146.6/164.7/183.2/203.7
- C. Overall length (in.)
313.8/340.6/368.1/409.5

