

## SPECIFICATIONS

### Weight (lbs.)

<b>Max. GVWR</b>	23,000
Front	7,900
Rear	15,800
<b>Body/Payload</b>	Up to 14,785

### Dimensions (in.)

<b>Wheelbase</b>	163.8/175.6 (MT only) 187.4/200.8 (MT/AT)
<b>Usable cab to rear axle</b>	128.4/140.3/152.1/165.5
<b>Overall length (End of frame)</b>	285.2/302.4/319.2/341.3

### Engine

<b>Model</b>	Mitsubishi 6D16-3AT3
<b>Type</b>	4-stroke cycle, watercooled, direct injection, turbocharged, intercooled diesel
<b>No. of cylinders</b>	Six in-line
<b>Piston displacement</b>	460.3 cu. in. (7.5 liters)
<b>Max. output (SAE, gross)</b>	200 hp/2,600 rpm
<b>Max. torque (SAE, gross)</b>	434 lb.ft./1,600 rpm
<b>Air cleaner</b>	Dry paper element with snorkel and rain cap
<b>Starter</b>	12-volt
<b>Alternator</b>	12-volt, 100-amp

### Chassis

<b>Clutch</b>	Hydraulic control, coil spring, 13.8 in. single dry cerametallic disc
<b>Transmission (Automatic option)</b>	6 forward and 1 reverse speed, 2nd to 6th synchromesh, 1st and reverse constant mesh gears
Ratio: manual	6.875/4.189/2.460/1.542/1.000/0.786, reverse 6.875
Ratio: automatic	(Allison AT542)* 3.454/2.253/1.407/1.000, reverse 5.024
<b>Axle</b>	Front Reverse Elliot, I-beam-type, 9,920 lbs. capacity
Rear	Full-floating-type, 16,975 lbs. capacity
<b>Final reduction gear</b>	Single-reduction hypoid gear
Ratio	4.857 (MT) 4.625 (AT)
<b>Tires</b>	Single front, dual rear traction
Size	Premium 9R22.5 (12PR)
<b>Steering</b>	Ball-nut-type with integral-type hydraulic power booster. Telescopic and tilt steering column with steering lock
<b>Suspension</b>	Front Laminated leaf springs with shock absorbers
Rear	Laminated leaf springs
<b>Brakes</b>	Service Air-over hydraulic, self-adjusting with anti-lock, air dryer standard (exhaust brake standard on MT only)
Parking	Internal expanding-type on propeller shaft
<b>Fuel tank</b>	50-gallon tank and fuel/water separator (standard)
<b>Electrical system</b>	Two 12-volt, maintenance-free batteries
<b>Vehicle safety</b>	Energy-absorbing steering wheel, crush bars in doors, daytime running lights and ABS standard

\*Allison does not approve the AT542 Transmission for use in refuse packers or one-way rental operations.

FK



2 0 0 0



# FK


MITSUBISHI FUSO TRUCK  
OF AMERICA, Inc.  
P.O. Box 464  
100 Center Square Road  
Bridgeport, NJ 08014

For the dealer nearest you,  
or for more information, write  
or call: 1 (800) 648-3876

Or visit our web site at  
<http://www.mitfuso.com>

Vehicle specifications are subject to change  
without notice. Photos and descriptions included  
in this brochure may vary in comparison to  
actual vehicle models.

♻️ PRINTED IN THE U.S.A. ON RECYCLED AND  
RECYCLABLE PAPER 7/99. ©1999 MITSUBISHI FUSO  
TRUCK OF AMERICA, Inc.

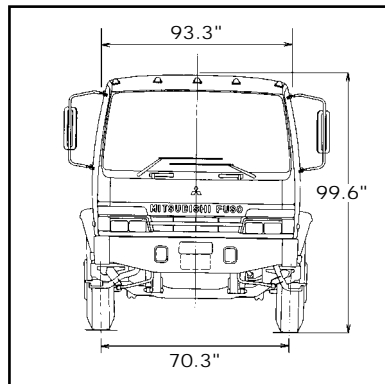

- A. Wheelbase (in.)  
163.8/175.6 (MT only) 187.4/200.8 (MT/AT)
- B. Usable cab to rear axle (in.)  
128.4/140.3/152.1/165.5
- C. Overall length (in.)  
285.2/302.4/319.2/341.3

