



SPECIFICATIONS

Weight (lbs.)

Max. GVWR		14,500
	Front	5,360
	Rear	9,880
Body/Payload		Up to 9,390*

Dimensions (in.)

Wheelbase	108.3/131.9/148.0/165.4
Usable cab to rear axle	83.1/106.7/122.9/146.8
Overall length (End of frame)	192.3/215.7/232.1/251.4

Engine

Model	Mitsubishi 4D34-3AT3B (145 hp)/ 4M50T2 (175 hp)
Type	4-stroke cycle, watercooled, direct injection, turbocharged, intercooled diesel
No. of cylinders	Four in-line
Piston displacement	238.0 cu. in., 3.9 liters (145 hp)/299.0 cu. in., 4.9 liters (175 hp)
Max. output (SAE, gross)	145 hp@2,900 rpm/175 hp@2,700 rpm
Max. torque (SAE, gross)	275 lb.ft.@1,600 rpm/347 lb.ft.@1,800 rpm
Air cleaner	Dry paper element with snorkel and rain cap
Starter	12-volt
Alternator	12-volt, 100-amp

Chassis

Clutch		Hydraulic control, 11.8 in., single dry plate
Transmission		5 forward and 1 reverse speed, 2nd to 5th synchromesh, 1st and reverse constant mesh gears (145 hp) 4-speed automatic (175 hp)
	Ratio: manual	5.380/3.028/1.700/1.000/0.722, reverse 5.380
	Ratio: automatic	3.018/1.548/1.000/0.703, reverse 2.678
Axle	Front	Reverse Elliot, I-beam-type, 5,510 lbs. capacity
	Rear	Full-floating-type, 9,920 lbs. capacity
Final reduction gear		Single-reduction hypoid gear
	Ratio	5.714 (manual/automatic)
Tires		Single front highway, dual rear traction
	Size	LT215/85R16E (10 PR)
Steering		Ball-nut-type with integral-type hydraulic power booster. Telescopic and tilt steering column with steering lock
Suspension	Front	Super Heavy-duty laminated leaf springs with shock absorbers and stabilizer bar
	Rear	Super Heavy-duty laminated leaf springs with shock absorbers and stabilizer bar
Brakes	Service	Hydraulic with vacuum servo assist, ABS dual-caliper four-wheel disc brakes with exhaust brake
	Parking	Internal expanding shoe-type
Fuel tank		33 gallons
Electrical system		Two 12-volt, maintenance-free batteries
Vehicle safety		Energy-absorbing steering wheel, crush bars in doors, daytime running lights and ABS standard

*Weight approximate. See dealer for complete details.

FE·SP



2 0 0 1




FE·SP

MITSUBISHI FUSO TRUCK
OF AMERICA, Inc.
P.O. Box 464
100 Center Square Road
Bridgeport, NJ 08014

For the dealer nearest you,
or for more information,
call: 877-202-9650

Or visit our web site at:
www.mitfuso.com

Vehicle specifications are subject to change
without notice. Photos and descriptions included
in this brochure may vary in comparison to
actual vehicle models.

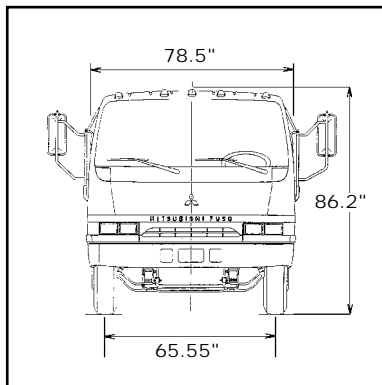

- A. Wheelbase (in.)
108.3/131.9/148.0/165.4
- B. Usable cab to rear axle (in.)
83.1/106.7/122.9/146.8
- C. Overall length (in.)
192.3/215.7/232.1/251.4

