

S P E C I F I C A T I O N S

Weight (lbs.)

| Max. GVWR | | 12,000 | |
|--------------|-------|-------------|--|
| | Front | 5,510 | |
| | Rear | 8,600 | |
| Body/Payload | | Up to 6,520 | |

Dimensions (in.)


| Wheelbase | 109.4/133.1 | | | |
|-------------------------------|-------------|--|--|--|
| Usable cab to rear axle | 83.7/107.3 | | | |
| Overall length (End of frame) | 193.5/217.1 | | | |

Engine

| Model | Mitsubishi 4D34-3AT3A |
|--------------------------|--|
| Туре | 4-stroke cycle, watercooled, direct injection, turbocharged, intercooled diesel |
| No. of cylinders | Four in-line |
| Piston displacement | 238.0 cu. in. (3.9 liters) |
| Max. output (SAE, gross) | 145 hp@2,900 rpm |
| Max. torque (SAE, gross) | 275 lb.ft.@1,600 rpm |
| Air cleaner | Dry paper element with snorkel and rain cap |
| Starter | 12-volt |
| Alternator | 12-volt, 100-amp |


Chassis

| Chassis | | |
|-------------------|------------------|---|
| Clutch | | Hydraulic control, 11.8 in., single dry plate |
| Transmission | | 5 forward and 1 reverse speed, 2nd to 5th synchromesh, 1st and reverse constant mesh gears 4-speed automatic (133.1 wheelbase only) |
| | Ratio: manual | 5.380/3.028/1.700/1.000/0.722, reverse 5.380 |
| | Ratio: automatic | 3.018/1.548/1.000/0.703, reverse 2.678 |
| | Transfer case | 2-speed, low 1.987, high 1.090 |
| Axles | Front | Single-reduction hypoid gear |
| | Ratio | 5.714 |
| | Rear | Single-reduction hypoid gear |
| | Ratio | 5.714 (limited slip differential opt.) |
| Tires | | Single front traction, dual rear traction |
| | Size | 7.50 R16E traction (10 PR) |
| Wheel | | 6Kx16-127-9t, 5-stud, 1-piece disc wheel |
| Steering | | Ball-nut-type with integral-type hydraulic power booster. Telescopic and tilt steering column with steering lock |
| Suspension | Front | Heavy-duty laminated leaf springs with shock absorbers |
| | Rear | Heavy-duty laminated leaf springs with shock absorbers |
| Brakes | Service | Hydraulic with vacuum servo assist ABS, self-adjusting drum all around, with exhaust brake |
| | Parking | Internal expanding shoe-type |
| Fuel tank | | 33 gallons |
| Electrical system | | Two 12-volt, maintenance-free batteries |
| Vehicle safety | | Energy-absorbing steering wheel, crush bars in doors, daytime running lights and ABS standard |



2 0 0 1







A. Wheelbase (in.) 109.4/133.1

B. Usable cab to rear axle (in.) 83.7/107.3

C. Overall length (in.) 193.5/217.1

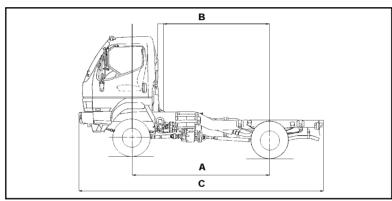





MITSUBISHI FUSO TRUCK OF AMERICA, Inc. P.O. Box 464 100 Center Square Road Bridgeport, NJ 08014

For the dealer nearest you, or for more information, call: 877-202-9650

Or visit our web site at: www.mitfuso.com

NOT AVAILABLE IN CALIFORNIA

Vehicle specifications are subject to change without notice. Photos and descriptions included in this brochure may vary in comparison to actual vehicle models.

 PRINTED IN THE U.S.A. ON RECYCLED AND RECYCLABLE PAPER 6/00. ©2000 MITSUBISHI FUSO TRUCK OF AMERICA, Inc.