



## SPECIFICATIONS

### Weight (lbs.)

|              |              |
|--------------|--------------|
| Max. GVWR    | 30,000       |
| Front        | 10,640       |
| Rear         | 20,080       |
| Body/Payload | Up to 20,490 |

### Dimensions (in.)

|                               |   |
|-------------------------------|---|
| Wheelbase                     | 181.9 (MT only)/200.0/218.5/239.4 (MT/AT) |
| Usable cab to rear axle       | 146.7/164.8/183.3/204.1                   |
| Overall length (End of frame) | 313.8/340.6/368.1/409.4                   |

### Engine

|                          |   |
|--------------------------|---|
| Model                    | Mitsubishi 6D16-3AT3  |
| Type                     | 4-stroke cycle, watercooled, direct injection, turbocharged, intercooled diesel |
| No. of cylinders         | Six in-line   |
| Piston displacement      | 460.3 cu. in. (7.5 liters)  |
| Max. output (SAE, gross) | 200 hp@2,600 rpm  |
| Max. torque (SAE, gross) | 434 lb.ft.@1,600 rpm  |
| Air cleaner              | Dry paper element with snorkel and rain cap                                     |
| Starter                  | 12-volt   |
| Alternator               | 12-volt, 100-amp  |

### Chassis

|                                 |   |
|---------------------------------|---|
| Clutch                          | Hydraulic control, coil spring 13.8 in. single cerametallic disc  |
| Transmission (Automatic option) | 6 forward and 1 reverse speed, 2nd to 6th synchromesh, 1st and reverse constant mesh gears                        |
| Ratio: manual                   | 6.875/4.189/2.460/1.542/1.000/0.786, reverse 6.875  |
| Ratio: automatic                | (Allison AT545) 3.454/2.253/1.407/1.000, reverse 5.024  |
| Axle                            | Front Reverse Elliot, I-beam-type, 10,800 lbs. capacity   |
| Rear                            | Full-floating-type, 20,080 lbs. capacity  |
| Final reduction gear            | Single-reduction hypoid gear  |
| Ratio                           | 6.166 (MT) 5.571 (AT)   |
| Tires                           | Single front highway, dual rear traction  |
| Size                            | Premium 11R22.5 (14PR)  |
| Steering                        | Ball-nut-type with integral-type hydraulic power booster. Telescopic and tilt steering column with steering lock  |
| Suspension                      | Front Laminated leaf springs with shock absorbers   |
| Rear                            | Laminated leaf springs  |
| Brakes                          | Service Air-over hydraulic, self-adjusting with anti-lock, air dryer standard (exhaust brake standard on MT only) |
| Parking                         | Internal expanding-type on propeller shaft  |
| Fuel tank                       | 50-gallon tank and fuel/water separator (standard)  |
| Electrical system               | Two 12-volt, maintenance-free batteries   |
| Vehicle safety                  | Energy-absorbing steering wheel, crush bars in doors, daytime running lights and ABS standard                     |

# FM·HR



2 0 0 1




# FM•HR

MITSUBISHI FUSO TRUCK  
OF AMERICA, Inc.  
P.O. Box 464  
100 Center Square Road  
Bridgeport, NJ 08014

For the dealer nearest you,  
or for more information,  
call: 877-202-9650

Or visit our web site at:  
[www.mitfuso.com](http://www.mitfuso.com)

Vehicle specifications are subject to change  
without notice. Photos and descriptions included  
in this brochure may vary in comparison to  
actual vehicle models.

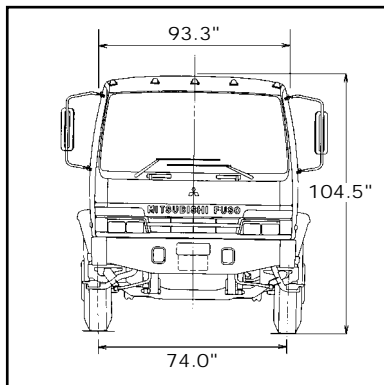

- A. Wheelbase (in.)  
181.9 (MT only)/200.0/218.5/239.4 (MT/AT)
- B. Usable cab to rear axle (in.)  
146.7/164.8/183.3/204.1
- C. Overall length (in.)  
313.8/340.6/368.1/409.4

