



## SPECIFICATIONS

# FM•SR



2 0 0 1

### Weight (lbs.)

<b>Max. GVWR</b>		32,900
	Front	11,700
	Rear	21,200
<b>Body/Payload</b>		Up to 22,915

### Dimensions (in.)

<b>Wheelbase</b>	181.9/200.0/218.5/239.4
<b>Usable cab to rear axle</b>	146.7/164.8/183.3/204.1
<b>Overall length (End of frame)</b>	313.8/340.6/368.1/409.4

### Engine

<b>Model</b>	Mitsubishi 6D16-3AT3
<b>Type</b>	4-stroke cycle, watercooled, direct injection, turbocharged, intercooled diesel
<b>No. of cylinders</b>	Six in-line
<b>Piston displacement</b>	460.3 cu. in. (7.5 liters)
<b>Max. output (SAE, gross)</b>	200 hp@2,600 rpm
<b>Max. torque (SAE, gross)</b>	434 lb.ft.@1,600 rpm
<b>Air cleaner</b>	Dry paper element with snorkel and rain cap
<b>Starter</b>	12-volt
<b>Alternator</b>	12-volt, 100-amp

### Chassis

<b>Clutch</b>		Hydraulic control, coil spring 13.8 in., single cerametallic disc
<b>Transmission</b>		6 forward and 1 reverse speed, 2nd to 6th synchromesh, 1st and reverse constant mesh gears
	Ratio: manual	6.875/4.189/2.460/1.542/1.000/0.786, reverse 6.875
<b>Axle</b>	Front	Reverse Elliot, I-beam-type, 11,905 lbs. capacity
	Rear	Full-floating-type, 22,485 lbs. capacity
<b>Final reduction gear</b>		Single-reduction hypoid gear
	Ratio	6.166
<b>Tires</b>		Single front highway, dual rear traction
	Size	Premium 11R22.5 (14PR)
<b>Wheel</b>		7.50x22.5-162-13t, 8 stud, 1-piece disc wheel
<b>Steering</b>		Ball-nut-type with integral-type hydraulic power booster. Telescopic and tilt steering column with steering lock
<b>Suspension</b>	Front	Laminated leaf springs with shock absorbers
	Rear	Laminated leaf springs
<b>Brakes</b>	Service	Full air, air dryer standard, auto slack adjusters with anti-lock (exhaust brake standard)
	Parking	Spring-loaded-type on rear wheels
<b>Fuel tank</b>		50-gallon tank and fuel/water separator (standard)
<b>Electrical system</b>		Two 12-volt, maintenance-free batteries
<b>Vehicle safety</b>		Energy-absorbing steering wheel, crush bars in doors, daytime running lights and ABS standard




# FM•SR

MITSUBISHI FUSO TRUCK  
OF AMERICA, Inc.  
P.O. Box 464  
100 Center Square Road  
Bridgeport, NJ 08014

For the dealer nearest you,  
or for more information,  
call: 877-202-9650

Or visit our web site at:  
[www.mitfuso.com](http://www.mitfuso.com)

Vehicle specifications are subject to change  
without notice. Photos and descriptions included  
in this brochure may vary in comparison to  
actual vehicle models.

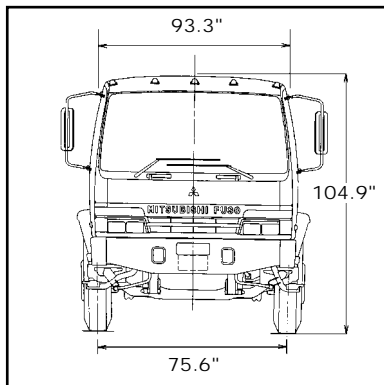

- A. Wheelbase (in.)  
181.9/200.0/218.5/239.4
- B. Usable cab to rear axle (in.)  
146.7/164.8/183.3/204.1
- C. Overall length (in.)  
313.8/340.6/368.1/409.4

