

# FE-SP

## SPECIFICATIONS



### Weight (lbs.)

<b>Max. GVWR</b>		14,500
	Front	5,360
	Rear	9,880
<b>Body/Payload</b>		Up to 9,155*

### Dimensions (in.)

<b>Wheelbase</b>	108.3/131.9/148.0/165.4
<b>Usable cab to rear axle</b>	83.1/106.7/122.9/142.3
<b>Overall length (End of frame)</b>	192.3/215.7/232.1/251.4

### Engine

<b>Model</b>	Mitsubishi 4D34-3AT3B (145 hp)/ 4M50-1AT2 (175 hp)
<b>Type</b>	4-stroke cycle, watercooled, direct injection, turbocharged, intercooled diesel
<b>No. of cylinders</b>	Four in-line
<b>Piston displacement</b>	238.0 cu. in., 3.9 liters (145 hp)/299.0 cu. in., 4.9 liters (175 hp)
<b>Max. output (SAE, gross)</b>	145 hp@2,900 rpm/175 hp@2,700 rpm
<b>Max. torque (SAE, gross)</b>	275 lb.ft.@1,600 rpm/347 lb.ft.@1,800 rpm
<b>Air cleaner</b>	Dry paper element with snorkel and rain cap
<b>Starter</b>	12-volt
<b>Alternator</b>	12-volt, 100-amp

### Chassis

<b>Clutch</b>		Hydraulic control, 11.8 in., single dry plate
<b>Transmission</b>		5 forward and 1 reverse speed, 2nd to 5th synchromesh, 1st and reverse constant mesh gears (145 hp) 4-speed automatic (175 hp)
	Ratio: manual	5.380/3.028/1.700/1.000/0.722, reverse 5.380
	Ratio: automatic	3.018/1.548/1.000/0.703, reverse 2.678
<b>Axle</b>	Front	Reverse Elliot, I-beam-type, 5,510 lbs. capacity
	Rear	Full-floating-type, 9,920 lbs. capacity
<b>Final reduction gear</b>		Single-reduction hypoid gear
	Ratio	5.714 (manual/automatic)
<b>Tires (Premium)</b>		Single front highway, dual rear traction
	Size	LT215/85R16E (10 PR)
<b>Steering</b>		Ball-nut-type with integral-type hydraulic power booster. Telescopic and tilt steering column with steering lock
<b>Suspension</b>	Front	Super Heavy-duty laminated leaf springs with shock absorbers and stabilizer bar
	Rear	Super Heavy-duty laminated leaf springs with shock absorbers and stabilizer bar
<b>Brakes</b>	Service	Hydraulic with vacuum servo assist, ABS dual-caliper four-wheel disc brakes with exhaust brake
	Parking	Internal expanding shoe-type
<b>Fuel tank</b>		33 gallons
<b>Electrical system</b>		Two 12-volt, maintenance-free batteries
<b>Vehicle safety</b>		Energy-absorbing steering wheel, crush bars in doors, daytime running lights and ABS standard

\*Weight approximate. See dealer for complete details.




# 2002


# FE-SP

## 2002

### SPECIFICATIONS

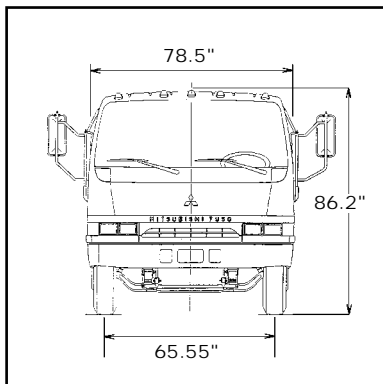

- A. Wheelbase (in.)  
108.3/131.9/148.0/165.4
- B. Usable cab to rear axle (in.)  
83.1/106.7/122.9/142.3
- C. Overall length (in.)  
192.3/215.7/232.1/251.4


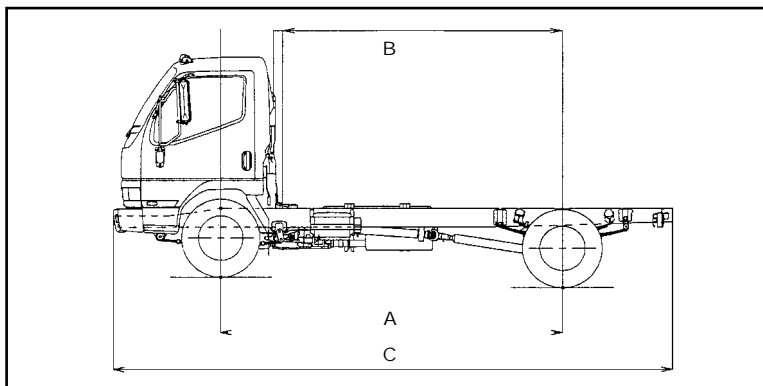


MITSUBISHI FUSO TRUCK  
OF AMERICA, Inc.  
P.O. Box 464  
100 Center Square Road  
Bridgeport, NJ 08014

For the dealer nearest you,  
or for more information,  
call: 877-202-9650

Or visit our web site at:  
[www.mitfuso.com](http://www.mitfuso.com)

Vehicle specifications are subject to change  
without notice. Photos and descriptions included  
in this brochure may vary in comparison to  
actual vehicle models.

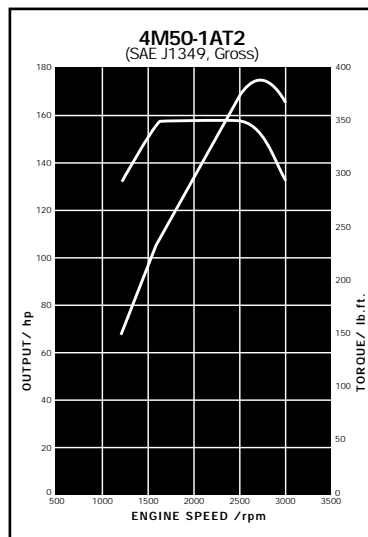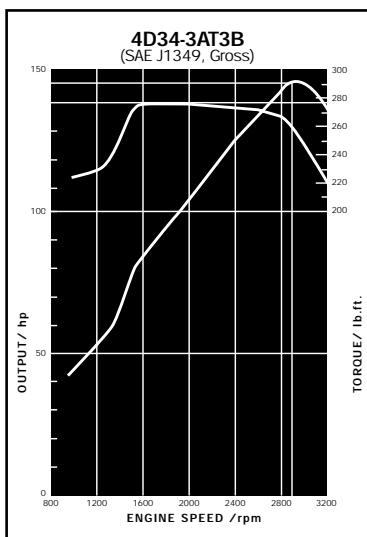

♻️ PRINTED IN THE U.S.A. ON RECYCLED AND  
RECYCLABLE PAPER 8/01. ©2001 MITSUBISHI FUSO  
TRUCK OF AMERICA, Inc.