

SPECIFICATIONS

Weight (lbs.)

Weight (lbs.)		
Max. GVWR		12,000
	Front	4,850
Rear		8,600
Body/Payload		Up to 6,975*
Dimensions (in	.)	
Wheelbase		108.3/131.9/148.0
Usable cab to rear axle		83.1/106.7/122.9
Overall length (End of frame)		192.3/215.7/232.1
Engine		
Model		Mitsubishi 4D34-3AT3B
Туре		4-stroke cycle, watercooled, direct injection, turbocharged, intercooled diesel
No. of cylinders		Four in-line
Piston displacement		238.0 cu. in. (3.9 liters)
Max. output (SAE, gross)		145 hp@2,900 rpm
Max. torque (SAE, gross)		275 lb.ft.@1,600 rpm
Air cleaner		Dry paper element with snorkel and rain cap
Starter		12-volt
Alternator		12-volt, 100-amp
Chassis		
Clutch		Hydraulic control, 11.8 in., single dry plate
Transmission (Automatic option)		5 forward and 1 reverse speed, 2nd to 5th synchromesh, 1st and reverse constant mesh gears
	Ratio: manual	5.380/3.028/1.700/1.000/0.722, reverse 5.380
	Ratio: automatic	3.018/1.548/1.000/0.703, reverse 2.678
Axle	Front	Reverse Elliot, I-beam-type, 5,290 lbs. capacity
	Rear	Full-floating-type, 9,480 lbs. capacity
Final reduction gear Ratio		Single-reduction hypoid gear
		5.714 (manual/automatic)
Tires (Premium)		Single front highway, dual rear traction
	Size	LT215/85R16E (10 PR)
Steering		Ball-nut-type with integral-type hydraulic power booster. Telescopic and tilt steering column with steering lock
Suspension	Front	Laminated leaf springs with shock absorbers and stabilizer ba
	Rear	Laminated leaf springs with shock absorbers and stabilizer ba
Brakes	Service	Hydraulic with vacuum servo assist, ABS dual-caliper front disc and self-adjusting rear drum with exhaust brake
	Parking	Internal expanding shoe-type
Fuel tank		33 gallons
Electrical system		Two 12-volt, maintenance-free batteries
Vehicle safety		Energy-absorbing steering wheel, crush bars in doors, daytime running lights and ABS standard




2002


*Weight approximate. See dealer for complete details.


2002

SPECIFICATIONS



- **A. Wheelbase (in.)** 108.3/131.9/148.0
- **B. Usable cab to rear axle (in.)** 83.1/106.7/122.9
- C. Overall length (in.)
- 192.3/215.7/232.1

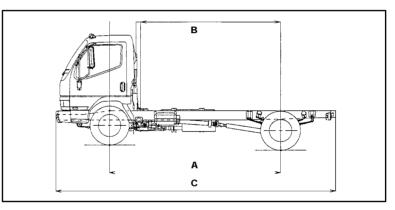



MITSUBISHI FUSO TRUCK OF AMERICA, Inc. P.O. Box 464 100 Center Square Road Bridgeport, NJ 08014

For the dealer nearest you, or for more information, call: **877-202-9650**

Or visit our web site at: www.mitfuso.com

NOT AVAILABLE IN CALIFORNIA

Vehicle specifications are subject to change without notice. Photos and descriptions included in this brochure may vary in comparison to actual vehicle models.

♥ PRINTED IN THE U.S.A. ON RECYCLED AND RECYCLABLE PAPER 8/01. ©2001 MITSUBISHI FUSO TRUCK OF AMERICA, Inc. tsubishi <u>Fuso</u>