FM-SR



SPECIFICATIONS


Weight (lbs.)

Max. GVWR		32,900
	Front	11,700
	Rear	21,200
Body/Payload		Up to 22,760
Dimensions (ir	n.)	
Wheelbase		181.9/200.0/218.5/239.4
Usable cab to rear axle		146.7/164.8/183.3/204.1
Overall length (End of frame)		340.6/368.1/409.4
Engine		
Model		Mitsubishi 6D16-3AT3
Туре		4-stroke cycle, watercooled, direct injection, turbocharged, intercooled diesel
No. of cylinders		Six in-line
Piston displacement		460.3 cu. in. (7.5 liters)
Max. output (SAE, gross)		200 hp@2,600 rpm
Max. torque (SAE, gross)		434 lb.ft.@1,600 rpm
Air cleaner		Dry paper element with snorkel and rain cap
Starter		12-volt
Alternator		12-volt, 100-amp
Chassis		
Clutch		Hydraulic control, coil spring 13.8 in., single cerametallic dis
Transmission		6 forward and 1 reverse speed, 2nd to 6th synchromesh, 1st and reverse constant mesh gears
	Ratio: manual	6.875/4.189/2.460/1.542/1.000/0.786, reverse 6.875
Axle	Front	Reverse Elliot, I-beam-type, 11,905 lbs. capacity
	Rear	Full-floating-type, 22,485 lbs. capacity
Final reduction gear		Single-reduction hypoid gear
	Ratio	6.166
Tires (Premium)		Single front highway, dual rear traction
	Size	Premium 11R22.5 (14PR)
Wheel		7.50x22.5-162-13t, 8 stud, 1-piece disc wheel
Steering		Ball-nut-type with integral-type hydraulic power booster. Telescopic and tilt steering column with steering lock
Suspension	Front	Laminated leaf springs with shock absorbers
	Rear	Laminated leaf springs
Brakes	Service	Full air, air dryer standard, auto slack adjusters with anti-locl (exhaust brake standard)
	Parking	Spring-loaded-type on rear wheels
Fuel tank		50-gallon tank and fuel/water separator (standard)
Electrical system		Two 12-volt, maintenance-free batteries
Vehicle safety		Energy-absorbing steering wheel, crush bars in doors, daytime running lights and ABS standard



2002


FM-SR SPECIFICATIONS 2002




A. Wheelbase (in.) 181.9/200.0/218.5/239.4

B. Usable cab to rear axle (in.) 146.7/164.8/183.3/204.1

C. Overall length (in.) 340.6/368.1/409.4

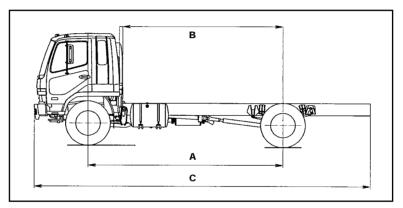



MITSUBISHI FUSO TRUCK OF AMERICA, Inc. P.O. Box 464 100 Center Square Road Bridgeport, NJ 08014

For the dealer nearest you, or for more information, call: 877-202-9650

Or visit our web site at: www.mitfuso.com

Vehicle specifications are subject to change without notice. Photos and descriptions included in this brochure may vary in comparison to actual vehicle models.

Set PRINTED IN THE U.S.A. ON RECYCLED AND RECYCLABLE PAPER 8/01. ©2001 MITSUBISHI FUSO TRUCK OF AMERICA, Inc.

FUSO