

FE-SP

SPECIFICATIONS



Weight (lbs.)

Max. GVWR		14,500
	Front	5,360
	Rear	9,880
Body/Payload		Up to 9,330*

Dimensions (in.)

Wheelbase	108.3/131.9/148.0/165.4
Usable cab to rear axle	83.1/106.7/122.9/142.3
Overall length (End of frame)	192.3/215.7/232.1/251.4

Engine

	145 hp	175 hp
Type	4-stroke cycle, watercooled, direct injection, turbocharged, intercooled diesel	
No. of cylinders	Four in-line	
Model	Mitsubishi 4D34-3AT3B	Mitsubishi 4M50-1AT2
Piston displacement	238.0 cu. in. (3.9 liters)	299.0 cu. in. (4.9 liters)
Max. output (SAE, gross)	145 hp@2,900 rpm	175 hp@2,700 rpm
Max. torque (SAE, gross)	275 lb.ft.@1,600 rpm	347 lb.ft.@1,800 rpm
Air cleaner	Dry paper element with snorkel and rain cap	
Starter	12-volt	
Alternator	12-volt, 100-amp	

Chassis


Clutch		Hydraulic control, 11.8 in., single dry plate	
Transmission		5 forward & 1 reverse speed 2nd to 5th synchromesh, 1st & reverse constant mesh gears	4-speed automatic
	Ratio	5.380/3.028/1.700/1.000/0.722, reverse 5.380	3.018/1.548/1.000/0.703, reverse 2.678
Axle	Front	Reverse Elliot, I-beam-type, 5,510 lbs. capacity	
	Rear	Full-floating-type, 9,920 lbs. capacity	
Final reduction gear		Single-reduction hypoid gear	
	Ratio	5.714 (manual), 5.285 (automatic)	
Tires (Premium)		Single front, dual rear	
	Size	LT215/85R16E (10 PR)	
Steering		Ball-nut-type with integral-type hydraulic power booster. Telescopic and tilt steering column with steering lock	
Suspension	Front	Super Heavy-duty laminated leaf springs with shock absorbers and stabilizer bar	
	Rear	Super Heavy-duty laminated leaf springs with shock absorbers and stabilizer bar	
Brakes	Service	Hydraulic with vacuum servo assist, ABS dual-caliper four-wheel disc brakes with exhaust brake	
	Parking	Internal expanding shoe-type	
Fuel tank		33 gallons	
Electrical system		Two 12-volt, maintenance-free batteries	
Vehicle safety		Energy-absorbing steering wheel, crush bars in doors, daytime running lights and ABS standard	

*Weight approximate. See dealer for complete details.

2004

FE-SP

SPECIFICATIONS

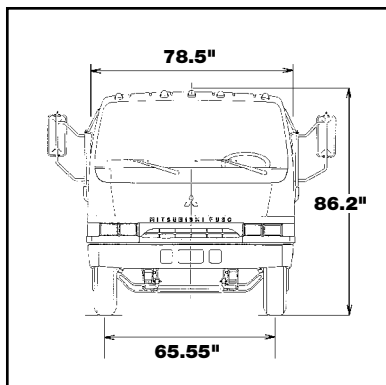

A. Wheelbase (in.)




108.3/131.9/148.0/165.4

B. Usable cab to rear axle (in.)

83.1/106.7/122.9/142.3

C. Overall length (in.)

192.3/215.7/232.1/251.4

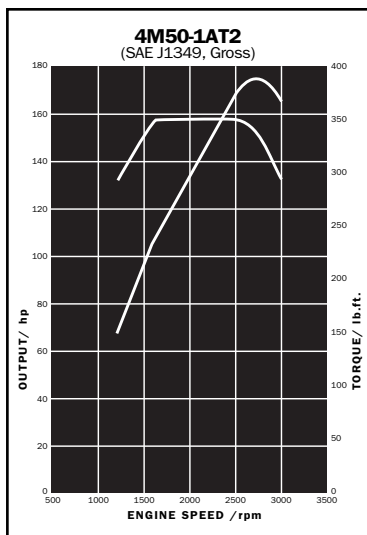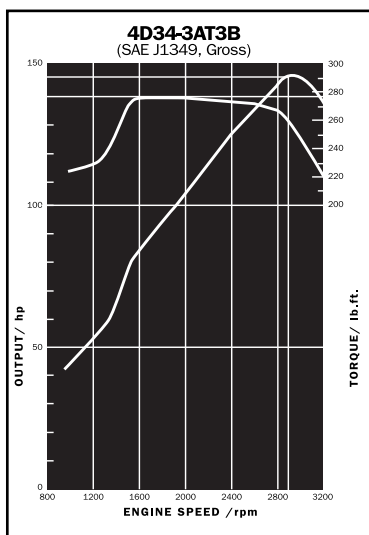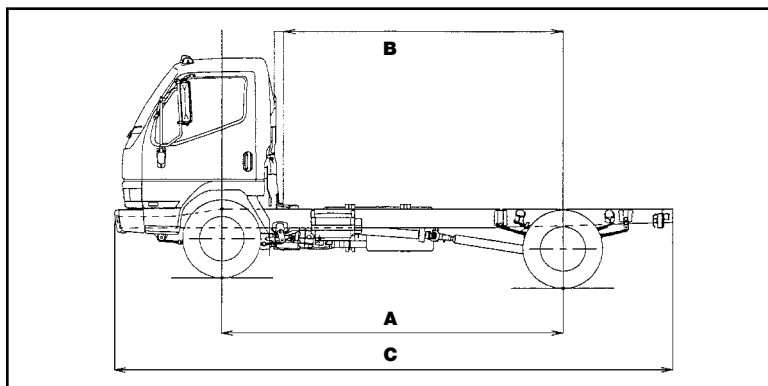

2004

MITSUBISHI FUSO
TRUCK OF AMERICA, Inc.
2015 Center Square Road
Logan Twp., NJ 08085

For the dealer nearest you,
or for more information,
call: **877-202-9650**

Or visit our web site at:
www.mitfuso.com

Vehicle specifications are subject to change without notice. Photos and descriptions included on this spec sheet may vary in comparison to actual vehicle models.

PRINTED IN THE U.S.A. ON RECYCLED AND RECYCLABLE PAPER 7/03. ©2003 MITSUBISHI FUSO TRUCK OF AMERICA, Inc.

MKT0404