## FG 4x4 SPECIFICATIONS





Weight (lbs.)	Model 639*	Model 649
Max. GVWR	12,000	14,050
Front	5,510	5,730
Rear	8,600	9,480
Body/Payload	Up to 6,255**	Up to 8,515**

### **Dimensions (in.)**

Wheelbase	133.1	109.4/133.1
Usable cab to rear axle	107.3	83.7/107.3
Overall length (End of frame)	217.1	193.5/217.1

### **Engine**

Model	Mitsubishi 4D34-3AT3A	
Туре	4-stroke cycle, watercooled, direct injection, turbocharged, intercooled diesel	
No. of cylinders	Four in-line	
Piston displacement	238.0 cu. in. (3.9 liters)	
Max. output (SAE, gross)	145 hp@2,900 rpm	
Max. torque (SAE, gross)	275 lb.ft.@1,600 rpm	
Air cleaner	Dry paper element with snorkel and rain cap	
Starter	12-volt	
Alternator	12-volt, 100-amp	

### **Chassis**


Clutch			Hydraulic control, 11.8 in., single dry plate	
Transmission		4-speed automatic	5-speed manual	
	Ratio	3.018/1.548/1.000/0.703, reverse 2.678	5.380/3.028/1.700/1.009/ 0.722, reverse 5.380	
	Transfer case	2-speed, low 1.987, high 1.090		
Axles	Front	Single-reduction hypoid gear		
	Ratio	5.714		
	Rear	Single-reduction hypoid gear		
	Ratio	5.714 (limited slip differential optional)		
Tires (Premium)		Single front, dual rear		
	Size	LT235/85R16 (10 PR)		
Wheel		6Kx16-135-9t, 6-stud, 1-piece disc wheel		
Steering		Ball-nut-type with integral-type hydraulic power booster. Telescopic and tilt steering column with steering lock		
Suspension	Front	Heavy-duty laminated leaf springs with shock absorbers		
Rear Heavy-duty laminated		Heavy-duty laminated leaf spri	eaf springs with shock absorbers	
Brakes	Service	Hydraulic with vacuum servo assist ABS, self-adjusting drum all around, with exhaust brake Internal expanding shoe-type		
	Parking			
Fuel tank		33 gallons		
Electrical system		Two 12-volt, maintenance-free batteries		
Vehicle safety	Energy-absorbing steering wheel, crush bars in doors, daytime running lights and ABS standard			

<sup>\*</sup>Not available in California.

<sup>\*\*</sup>Weight approximate. See dealer for complete details.

### CIFICATIONS







A. Wheelbase (in.)

109.4/133.1

B. Usable cab to rear axle (in.) 83.7/107.3

C. Overall length (in.) 193.5/217.1

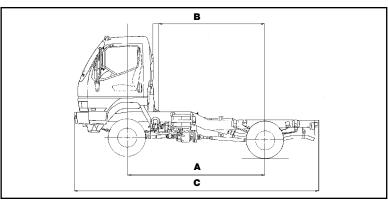



# 2004

**MITSUBISHI FUSO** TRUCK OF AMERICA, Inc. 2015 Center Square Road Logan Twp., NJ 08085

For the dealer nearest you, or for more information. call: 877-202-9650

Or visit our web site at: www.mitfuso.com

Vehicle specifications are subject to change without notice. Photos and descriptions included on this spec sheet may vary in comparison to actual vehicle models.

PRINTED IN THE U.S.A. ON RECYCLED AND RECYCLABLE PAPER 7/03. ©2003 MITSUBISHI FUSO TRUCK OF AMERICA, Inc.

MKT0406