

Sprinter Cargo Van

## Room to work. Room to grow.





Get more out of your business with the new Mercedes-Benz Sprinter Cargo Van.
Offering Best-In-Class¹ payload capacity of up to 5,375 lbs., Best-In-Class¹ cargo capacity of up to 547 cu. ft., Best-In-Class¹ rear and side door opening areas and Best-In-Class¹ standing height of 6'4", the Sprinter Cargo Van, with unibody construction, gives you more to haul more.

Powered by a new 3.0 liter V6 turbo<sup>2</sup> with BlueTEC SCR diesel technology, the Sprinter delivers incredible fuel economy and impressive power from one of the world's cleanest diesel engines. Add in state-of-the-art safety features

like Adaptive ESP® with Load Adaptive Control & Roll Over Mitigation, ESP® Trailer Stability Assist³ and our unique Cargo Protection load-securing & lashing system, and you've got a van designed to work smarter for you courtesy of the world leader in commercial vehicles.

To find a Sprinter dealer near you, go to MBSprinterUSA.com.


## Mercedes-Benz





## Sprinter Cargo Van

- ▶ 2 wheelbases, 3 body lengths, 2 cargo area heights, 3 Gross Vehicle Weight classes
- ▶ Class-leading cargo volume (318 to 547 cu ft) in the full size van class
- ► Class-leading payload (2,872 to 5,375 lbs)
- ▶ Class-leading cargo area height (up to 76.4 inches)
- ▶ Loading length up to 185 inches
- ▶ Towing capacity up to 5,000 lbs and a tongue weight of 500 lbs

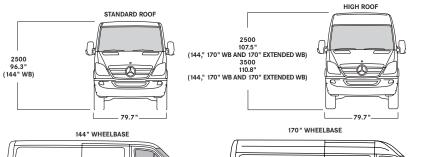



BlueTEC SCR Diesel engine with AdBlue®2

EPA / CARB 2010 Compliant

6-cylinder, V 72°

4 valves per cylinder

Displacement 2,987 cc

188 hp at 3,800 rpm

Rated torque 325 lb-ft at 1,400-2,400 rpm

Rear-wheel drive

5-speed automatic transmission

Fuel type: Ultra low sulfur diesel


Tank capacity 26.4 gallons


Electronically controlled direct injection with common rail

Turbocharger and intercooler function

Battery 12 V/100 Ah, alternator 220 A







	2500 STANDARD	2500 HIGH ROOF			3500 HIGH ROOF						
	144" WB	144" WB	170" WB	170" WB Ext	144	144" WB		170 " WB		170 " WB Ext	
Turning Diameter (ft) Wall To Wall	47.6	47.6	54.6	54.6	4	47.6 54.6 54.6		4.6			
Ground To Sliding Door Step - Side	20.2	20.2	19.9	19.9		22	2	1.2	21.2		
Load Height — Rear	27.6	27.6	27.4	27.2	3	1.1	30.9		3	0.9	
Door Opening height – Side	59.8	71.7	71.7	71.7	7	71.7 71.7		71.7			
Door Opening height – Rear	60.6	72.4	72.4	72.4	7	2.4	72.4		72.4		
Door Opening Width – Side	51.2	51.2	51.2	51.2	5	1.2	51.2		51.2		
Door Opening Width – Rear	61.6	61.6	61.6	61.6	6	1.6	61.6		61.6		
Cargo Bed Length	128.5	128.5	169.3	185	12	28.5	169.3		185		
Cargo Width at Wheelhouse	53.1	53.1	53.1	53.1	3	8.5	38.5		3	38.5	
Maximum Width at Floor	70.1	70.1	70.1	70.1	7	0.1	70.1		7	0.1	
Interior Height	65	76.4	76.4	76.4	7	6.4	76.4		7	76.4	
Cargo Volume (cu ft)	318	371	494	547	371		494		547		
Maximum Available GVWR (lb)	8,550	8,550	8,550	8,550	GVWR 9,990	GVWR 11,030 <sup>4</sup>	GVWR 9,990	GVWR 11,0304	GVWR 9,990	GVWR 11,030 <sup>4</sup>	
Base Curb Weight (lb)	5,081	5,148	5,545	5,678	5,666	5,655	6,085	6,074	6,196	6,185	
Maximum Payload (lb)	3,469	3,402	3,005	2,872	4,324	5,375	3,905	4,956	3,794	4,845	
Maximum Available GCWR (lb)	13,550	13,550	13,550	13,550	14,990	15,250	14,990	15,250	14,990	15,250	
Maximum Towing (lb)	5,000	5,000	5,000	5,000	5,000		5,000		5,000		
Fuel Tank Capacity (gal)	26.4	26.4	26.4	26.4	26.4		26.4		26.4		

Inches Unless Otherwise Noted

## Selected Optional Equipment Packages

ocicotca optional Equipment I dokages				
Accessory Package	Heavy Duty Front Axle Package			
Antitheft Alarm Package	Heavy Duty Suspension Packages I, II, III & IV High Performance Air Conditioning Package Interior Lighting Package			
Cargo Package				
Cold Climate Package				
Comfort Seating Package	Lighting Package	V		
Contractor Package	Mobility Prep Package			

PARKTRONIC Package		
Premium Package		
Rear Heating Packages I, II & III		
Trailer Hitch Package		
Walkthrough Package		
Window Packages I, II, III & IV		

Some specifications and features shown or mentioned in this brochure are optional and only available upon request at extra cost. Specifications are subject to change without notice.

Warning: the forces of a deploying air bag can cause serious or fatal injuries to a child under age 13. See operator's manual for additional warnings and information on air bags, seat belts and child seats.

<sup>&</sup>lt;sup>1</sup> Based on a comparison of the Automotive News classification of full size commercial vans.

<sup>&</sup>lt;sup>2</sup> Requires the use of ultra-low-sulfur diesel fuel. Mercedes-Benz Sprinters are approved to use B5 biodiesel (approved diesel fuel with a maximum 5% biodiesel content) in all BlueTEC engines. The only approved biodiesel content is one that both meets ASTM D6751 specifications and has the oxidation stability necessary to prevent deposit-/corrosion-related damages to the system (min. 6h, proven by EN14112 method). Please see your service station for further information. If the B5 biodiesel blend does not clearly indicate that it meets the above standards, please do not use it. The Mercedes-Benz New Vehicle Limited Warranty does not cover damage caused by non-Mercedes-Benz approved finel standards.

<sup>&</sup>lt;sup>3</sup> No system, regardless of how advanced, can overcome the laws of physics or correct careless driving. Please always wear your seat belt. Performance is limited by available traction, which snow, ice and other conditions can affect. Always drive carefully, consistent with conditions. Best performance in snow is obtained with winter tires. Read Operator's Manual before towing. In some states, aftermarket trailer brakes are required. See dealer for details.

<sup>&</sup>lt;sup>4</sup> Optional or part of an Option Package.