



CHEVROLET

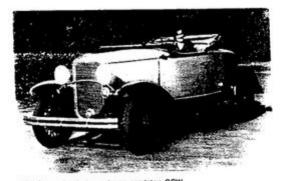

1931 Chevrolet, Independence, roadster, OCW

1931

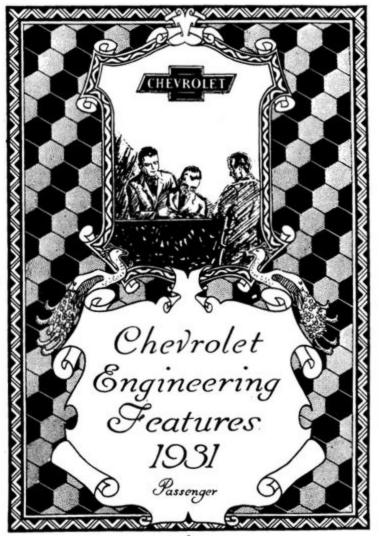

Introduction

This book of Chevrolet engineering features is compiled for the purpose of providing authorized persons in the Chevrolet orgamination with advance information concerning the 1931 models. This information is strictly confidential and is not intended for publication. Only such features as are new for 1931, or were added to the 1930 model late in the season, are described in detail.

The following data was collected somewhat in advance of production, and is up-to-date as of September 15, 1930. We revisions will be made in this book to cover subsequent changes. Complete specifications will be available later in different form.

> Chevrolet Motor Company Engineering Department September Fifteenth 1930

Cherrolet Engineering

The 1931 model, with its increased strength, greater beauty, increased comfort and remarkable performance, embodies the results of the same careful engineering which helped to make its many predecessors successful. Long before the 1930 model had been announced, engineering work on the 1931 model was commenced. With



such a background of engineering and testing, a thoroughly proven product is assured.

The twenty Chevrolet Engineers divide among them the various units of the car and truck. Often two or more are engaged in independent studies of the same unit. Then the engineer has assured himself


that his design represents the best result per dollar, it is released to the Chevrolet Experimental Laboratories.

These laboratories are housed in a separate building having

44,400 square feet of floor space. The experimental laboratory is equipped with the most modern precision machinery which is operated by 107 expert mechanics. Among these mechanics we may find expert tool makers, model builders, wood workers, trimmers, sheet metal workers and blacksmiths who are able to simulate by hand what will finally be produced in vast quantities by mammoth machines. Here facilities are also provided for extensive laboratory tests.



Dynamometers determine the power, torque, fuel consumption and other performance characteristics of the various units. Stroking machines often continue their steady hazzer, hazzer, hazzer at regular intervals through a given stroke hour after hour, subjecting frames, sales and wheels to gruelling tests to find their weak points or to prove their strength. Clutches are subjected to thousands of engagements by a special machine while all of the wear and noise characteristics may be studied in detail. The strobo-

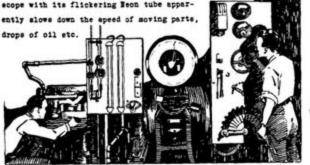


to permit the engineer to study their relative action under ideal conditions.

Thousands of interesting tests are conducted here while the engineers may study the performance of their designs and experiment with them until they function satisfactorily. Then the laboratory tests have been completed, the device is installed on care which are sent to the General Motors Proving Ground.

This wonderful outdoor laboratory, comprising 1,125 acres of hills and valleys, has every conceivable kind of road over which Chevrolet cars are tested day and night in winter and summer under the most gruelling conditions. Here Chevrolet engineers may again study the performance of their designs under road conditions. The Chevrolet test crew not only drives experimental and production cars and trucks over a million miles a year but also issues reports of their performance, repairs and adjustments in the most minute detail. Every drop of oil applied and



every individual bolt tightened is reported to all engineers daily. The engineers study these reports in detail and make fre-



quent inspections at the
Proving Ground. They often
drive the test cars themselves to check up on the
conditions reported. With
these well organized test
facilities, the Chevrolet
owner is assured of receiving a thoroughly engineered product which
has already been subjected to every condition it will be
celled upon to meet.

THE SHOP IN

At this stage of the development, the manufacturing departments are called into consultation. The men who will finally be charged with the responsibility for producing the vehicle in



quantities discuse the production possibilities with the engineers. The resulting decisions are incorporated in the final production drawings by a force of 98 draftsmen.

These drawings include definite specifications covering every minute detail: tiny chamfers, fillets, production limits, material specifications, heat treatment and assembly instructions. These drawings serve to guide the pattern makers, die makers, tool makers, mechanics, inspectors, assemblers and all others who have anything to do with the manufacture of Chewrolet products.



Antoni

With the release of the production drawings, the engineers' responsibility does not end. Often they journey into the field and study the performance in various parts of the country, or help the dealer organization to make proper adjustments to suit the peculiar local conditions. The engineers collect much useful

AC MARIEN

data on these trips among the dealers which they incorporate in subsequent experimental designs.

The existing co-operation between the engineering organization, the manufacturing organization and the field organization can have but one result: to produce a line of care and trucks

which satisfies the needs of Chevrolet customers and can be produced at the lowest possible cost.





New Features in the 1931 Models

FRANE

- 1. Longer wheelbase.
- 2. More rigid frame.
- 3. Heavier side rails.
- 4. Stronger front cross member Four rivets to lower flange
- 5. Stiffer rear engine support.
- 6. More rigid one-piece rear cross member.
- 7. Body brackets added.
- 8. Step hanger tie bar and fender well brace added.

EIHAUST SYSTEM

- 9. Improved welding of muffler.
- 10. Two-point, resilient mounting of muffler and pipes.

SPRING SHACKLES

- 11. Larger diameter shackle bolts and cold pressed side bars.
- 13. Secure shackle bolt nut lock.

FRONT AXLE

- 13. Stronger I beam.
- 14. Improved King pin lock.
- 15. Stronger steering arms.
- 16. Improved brake centralizer lock.

REAR AILE

17. Improved rear spring seats.



ENGINE

- 18. Smoother operation.
- 19. More rigid crankcase and cylinder block.
- 20. Rigid, cast clutch housing.
- 21. Stiffer crankshaft.
- 22. Broached type harmonic balancer.
- 23. Steel ring gear on flywheel.
- 24. More gasket clamping space between exhaust valves.
- 25. Cooler spark plugs.
- 26. Rubber boot on accelerating pump.
- 27. Stiffer rocker cover.
- 28. One-piece rocker cover gasket.
- 29. Increased piston ring pressure.
- 30. One-piece upset push rods.
- 31. Reduced forward water pump thrust.
- 32. Variable pitch valve springs.
- 33. Improved air cleaner combined with flame arrester.
- 34. Improved crankcase ventilator and oil filler.

CLUTCH

- 35. Ball bearing pilot.
- 36. Pivot mounted fork.
- 37. Improved pedal mounting.
- 38. Increased accessibility for inspection and lubrication.
- Moulded facings. Pressure plate machined and polished under pressure. Flywheel face polished.



- 40. Improved external mounting.
- 41. Second speed gears of nickel-molybdenum steel carburized.
- 42. Free gear shift.

STEERING MECHANISM

- 43. Worm and sector type steering gear.
- 44. Greater reduction ratio.
- 45. Roller bearing mounted worm.
- 46. Improved adjustment.
- 47. Rubber mast jacket bushing.
- 48. Three-spoke, rubber steering wheel.

RHETLS

49. Wire wheels standard equipment.

SEEET METAL

- 50. Improved front fender appearance.
- 51. Stronger front fender iron.
- 52. Forged, chrone-plated headlamp tie bar.
- 53. Improved radiator splash guard.
- 54. Stiffer hood with concealed side hinge.
- 55. Improved hood louvre appearance.
- 56. Chrome-plated bood catches and handles,
- 57. Wider, stiffer running boards with chrose-plated moulding.



- 58. Improved appearance of running board aprons.
- 59. Improved rear fender appearance.
- so. Improved rear cross member cover.
- 61. Larger, chrome-plated gasoline tank cap.

ELECTRICAL SYSTEM

- 62. Improved wiring harness.
- 63. Chrome-plated parabolic headlamps.
- 64. Chrome-plated cowl lamps on sport models.
- 65. Improved chrome-plated tail and stop lamps.
- 66. High-frequency, vibrator horn with chrome face plate.
- 67. Black Bakelite control buttons.
- 68. Improved oil gauge.
- 69. Improved gasoline gauge.
- 70. Anti-rattle Electrolock.
- 71. Improved windshield wiper.
- 72. Insulated windshield wiper pipe.

RADIATOR

- 73. Increased cooling capacity.
- 74. Improved appearance.
- 75. Can and spring type filler cap.
- 76. Chrome-plated radiator screen on sport models.

BODY

- 77. Longer and roomier.
- 78. Dropped sill.
- 79. Insulated dash and front floor mat.


- 80. Chrome-plated cowl moulding.
- 81. Fabrikoid door panels in open bodies.
- 82. Automatic windshield wiper on open models.
- 83. Weatherstripped doors on open bodies.
- 84. Oak top bows in natural finish on open bodies.
- 85. Top slat irons finished in body color on open bodies.
- 86. Pockets in both open body front doors.
- 87. Improved Roadster body design.
- 88. Improved top design on Roadster.
- 89. Sedan-type robe rail and foot rest in Phaeton.
- 90. Tonneau carpet in Phaeton.
- 91. Colored top fabric on open models.
- 92. Top boot standard equipment on Phaeton.
- 93. More confortable rumble seat on Sport Roadster.
- 94. Improved body panel design on closed bodies.
- 95. Pressed mouldings throughout closed bodies.
- 98. Marrower front pillar for better vision.
- 97. Increased windshield vision.
- 98. Improved body lines.
- 99. Concave window reveals.
- 100. Beaded instrument panel.
- 101. Barrower upper hinges on closed body doors.
- 103. Improved body hardware.
- 103. Both front Coach seats bucket type.
- 104. Tool compartment under front seats of Coach.
- 105. Additional row of buttons on front of seat cushions.
- 106. Optional trimming material.



- 107. Improved cab.
- 108. 157 inch, dual-wheel, heavy duty truck added to line.
- 109. Reinforced side rails on 131 inch trucks.
- 110. Stronger second cross member.
- 111. Stronger front axle.
- 113. Stronger rear axle shaft with larger bearings.
- 113. Four-shoe, internal rear brakes, 16 inches diameter.
- 114. Ten inch clutch.
- 115. Dual wheels on rear of 157 inch trucks.
- 116. Increased cooling capacity.


ACCESSORIES

- 117. Two-stage truck rear springs.
- 118. Improved fender well look.
- 119. Improved bumpers and fender guards.
- 120. Improved ornamental radiator cap.
- 121. Seat covers.
- 132. Burbank material tire cover.
- 123. Dash clock.




Frame

The frame assembly has been completely redesigned. The length is increased to provide a wheel base of 108 9/16 inches, over two inches longer than the 1930 model. The entire frame

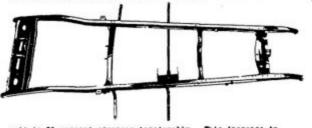

unit is 50 percent stronger torsionally. This increase in strength is accomplished by additional metal distributed at advantageous points to produce the maximum result.

The side rails of the frame have been increased in section as shown in the accompanying illustration. The upper and lower flanges are even wider at the front and rear cross members, providing extremely rigid attachment of those members. The holes in




the side rails are very carefully located to avoid localization of stresses. In the design of the side rails, as in all other frame members, the material is used to its greatest advantage, due consideration being given to manufacturing methods and economy.

THE OWNER OF THE OWNER OWN

FRONT CROSS MINER

The front cross member is very strong and rigid, blending from a modified double channel section at the center to a double "2" section at the ends. This member, which is widened toward its ends, is attached to the top flanges of the side rails by two rivets on each side and to the lower flanges by four rivets at each side. The side rail stress is greatly reduced by the introduction of these four rivets and by their judicious location.



REAR ENGINE SUPPORT

The rear engine support cross member is also improved in design. This member is made in three pieces. The major part is of double "2" section at the center, blending into a triangular flange at its outer ends, riveted to the webs of the side rails.



The wide stiffening flanges at the bottom are designed so as to protect the flywheel underpan by shielding it from flying stones and road obstructions. At the
points where the engine is supported, a
reinforcing bracket is introduced at each
side, fitting closely over the main member, being secured by five rivets. From
these points the brackets bend upward
to reach the upper flanges of the side

THE VEGILET

rails, flaring out to provide a rigid, two-rivet mounting at these points. This cross member contributes a considerable portion of the increased strength and rigidity to the frame. It effectively ties the front of the body by means of the front body mounting bolts which pass through the upper flanges of the side rails and the cross member brackets. Localization of stresses in the vicinity of the dash is avoided by the rear engine support cross member.

REAR CROSS MEMBER



The rear cross member has also been redesigned. It is a one-piece member, depressed at each side of its center to form supports for the gasoline tank. It is attached to the side rails by three rivets through the upper flanges at

each side. Four rivets on each side, two at the front and two at the rear, secure the rear cross member to the lower flanges of the side rails. The torsional strength of the frame at the rear end is increased 30 percent by this design. Separate brackets are riveted to the rear cross member to provide more rigid mountings for the fender guards and the gasoline tank cover.

BODY BRACKET

A sturdy stamped bracket extends outward beyond the frame to support the body more effectively. This helps to reduce both frame stresses and body deflections.

STEP HANGER TIE BAR

The front step hangers are connected by a channel section tie bar which also helps to support the battery. This additional tie reduces the vertical movement of the front fenders 75 percent. The relative motion of the radiator, headlamps and running board aprons is also reduced considerably. The additional support under the battery not only protects the battery from damage; but also reduces frame stresses due to the battery mounting.




Comparative Specifications


	1000	4004
Wheelbase	106 1/2	108 9/16
Side Rail - Stock Thickness	9/64	9/64
Depth	4 3/4	5
Flange Width	1 3/4	2 1/4
Front Gross Member Rivets to Lower Flange	4	8
Rear Engine Support	One piece	Three piece
Rear Cross Member Rivets to Lower Flange	6	8
Body Bracket	None	Stamped
Step Hanger Tie Bar	Yone	Channel- Section
Relative torsional rigidity of frame	100\$	150%.

Exhaust System


The muffler has been improved by the addition of a flange at the front end of the inner shell. This facilitates spot-welding and insures a secure joint between the inner shell and the front head. The welding of the baffle to the rear end of the inner shell is also made more secure by the addition of five lugs bent over the outside of the shell. By these means considerably more surface is available for welding at both ends.

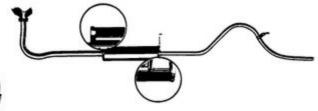

The exhaust pipe is secured to the manifold as heretofore, but the muffler and tail pipe are mounted on the frame by means of two brackets, one at the rear end of the muffler and another toward the rear end of the tail pipe. The forward bracket clamps the tail pipe to the muffler and is of sufficient length to lend some flexibility to the mounting. This relieves the strain on the flange mounting at the manifold considerably. The rear bracket is relatively rigid and holds the tail pipe in a position closer to the center of the car. In this new position interference with the shock absorber arm is avoided and the spring shackle is protected from the hot exhaust gases.



The front and rear springs have been changed during the 1930 season to incorporate clips of a different type. These clips are riveted to the spring leaves and are bent over the top of the leaves preventing excessive spreading.



The self-adjusting spring shackles have been refined and improved in design. The side bars are cold punched. By this method of manufacture shrinkage between operations and formation of scale, incident to hot forging, are avoided and greater accuracy is assured. The center bolt has been increased in diameter and is secured by an extra-thick nut which is locked against

rotation by a pressed steel lock plate having a hexagonal hole, fitting closely on the nut. The ears of the lock plate are bent over the edges of the shackle. This new design prevents loosening of the nut as well as stretching of the bolt and stripping of threads.

Comparative Specifications

19



Front Axle

The front axle I beam has been strengthened at its outer end. The stock added in the forging at this point prevents bending, twisting and deformation of the King pin holes. The King



pins have been strengthened by the elimination of the flat portion for looking purposes. The new look pin is designed so as
to provide a curved portion which fits
closely on the diameter of the King pin.
The look pin nut pulls these two surfaces
together, and the resulting friction prevents rotation and endwise motion of the

King pin. Both the steering arms have been increased in strength by the addition of metal around the attaching bolt bosses, both

of which are elongated. The rear boss has very heavy draft which also adde to the strength.

The front

brakes have proven so eatisfactory that no design changes have been made, with the exception of a more effective lock for the centralizer clamp bolts. The common lockwasher at this point is replaced by a special stamped lock.





Rear Axle

The third member of the rear axle is lengthened to agree with the increase in wheelbase.

The rear spring seats have been completely redesigned. The position of the "U" bolts is reversed. In the new design, these bolts straddle the springs and are parallel to the axle housing. This prevents distortion of the bored hole in the seat and cap and eliminates rattles due to excessive wear. The anchor plate



which is riveted to the axle housing to locate the spring seats transversely on same is rolled from channel section steel, providing a thrust surface having 50% greater area. Grooves are provided in the spring seat to conduct lubricant from the cap to the thrust surfaces of

the anchor plate. This adequate supply of lubrication combined with the enlarged thrust surface retards wear and prevents rattles.

Comparative Specifications

1931

Rear Spring U Bolt position

Parallel with axle

Rear Spring Seat Anchor Plate section Rectangular

Channel.



All of the improvements in the engine are in the nature of refinements which result in greater rigidity, emoothness and durability. The cylinder and case has been strengthened by the addition of ribs at advantageous points. On the manifold side a

horisontal rib 7/16 thick has been added rib very effectively

for a distance of five inches each side of the center. On the same eide a vertical rib has been added between cylinders #3 and #4. This ties the vertical wall

was adopted only

between the cylinders to the crankcase roof and the water jacket. The crankcase roof is increased in thickness which has considerable effect on the rigidity. The ribs at cylinders #3 and #4 have been extended downward to the crankcase roof.

On the valve side the ribs between cylinders #2 and #3 and between cylinders #4 and #5 have also been extended downward to the crankcase roof which is doubled in thickness on this side.

This rib structure after extensive tests which definitely proved the value of each added ounce of metal. Final tests show that the rigidity is increased 43 percent with an increase of only 1 1/2 percent in weight.

THE VALUE OF

The structure at the rear end of the cylinder and case in combination with the new cast clutch housing reduces rear bearing

deflection to a minimum. By means of the side ribs and the stiff flanges the rear bearing

load is transferred through the entire rear end structure, making use of the stiffening value of all of the walls and ribs.

CLUTCH HOUSING

The clutch housing is completely redesigned. It is made of cast iron, very effectively ribbed to minimize deflections. The sturdy forward flange bolts to the rear flange of the crankcase. The two upper bolts attach it to the cylinder



and case at the water jacket. Three dowel pins maintain accurate relation between the crankcase and the clutch housing. The bousing is inherently sturdy and lends itself to precision machining,

insuring

mus rigidity. Two strong pressed

steel brackets bolted securely to the housing mount on the frame cross member. Closure of the bottom of the clutch housing is effected by means of a threepiece underpan. Each of these

pieces is independently removable, permitting easy access to the clutch, flywheel and rear crankshaft bearing for adjustment and inspection.

CRANKSHAFT

The torsional and bending strength of the crankshaft has been increased by the addition of metal in the short arms. Thile the additional metal increases the weight very slightly, the effect on engine smoothness is considerable.



The harmonic balancer which was added early in the 1930 season has been simplified in design. This ingenious device is combined with the crankshaft pulley and consists of a small flyweight driven by the pulley on the crankshaft through relatively flexible driving members. Four pins riveted in the pulley act as the driving members. Multiple leaf springs on each side of the pins are retained in cavities broached in the flyweight. The weight is flexibly driven by the eight banks of five springs each.







Then the engine is running, any change in the velocity of the crankshaft is resisted by the action of the flyweight in the balancer. This resistance is manifested by a bending action in the four banks of springs driven by the pine. These springs then have a tendency to return to their normal position and in so doing tend to produce a bend in the four banks of springs on the opposite side of the pins. This cycle of operation, acting directly opposite to the crankshaft cycle dampens out the vibrations at the critical speed of the crankshaft.

PLYTHEEL

During the 1930 season a steel ring gear was added to the flywheel. This ring gear is made of high car-

welded. It is then normalized by heat treatment. After being carefully machined, the teeth are cut chamfered to facilitate engagement of the starter pinion. The entire ring gear is then hardened by heating to a high temperature and quenching in oil. The finished inside diameter of the ring gear is from .020 to .030 smaller than the

outside diameter of the machined shoulder on the flywheel. The ring gear is expanded, by heating to 400 degrees, sufficiently to permit assembly while hot. As the ring gear cools it contracts, shrinking onto the flywheel to form a permanent fit on same.

With this design breakage of flywheel teeth is minimized; and smooth, easy engagement of the starter pinion is assured.



CYLINDER HEADS

The cylinder head was improved during the 1930 season by providing more space for gasket seat between the combustion chan-



bere where exhaust valves are adjacent. This allows the gasket to squeeze out under pressure to a greater extent without being subjected to the hot gases. More effective seal-

ing and longer life result from this improvement.

SPARE PLUGS

The spark plugs have been changed to the "G-12" type. This type of plug provides for the same position of the spark gap as in the "G-14" type previously used, but the exposed portion of the porcelain is shorter.

This insures quicker transfer of heat from the points with consequent

reduction of plug temperature, which tends to increase plug life.

CARBURETOR



During the 1930 season a rubber boot was introduced at the top of the carburetor accelerating pump. The lower bead of this boot fits snugly over the accelerating pump body while the upper bead contracts into a groove in the pump plunger shaft. This effectively excludes water from the pump cylinder preventing freezing during cold weather.



VALVE ROCKER COVER

The design of the valve rocker cover and the gasket has been improved to insure a leak-proof closure of the rocker compartment on top of the cylinder head. The three reinforcing members inside the cover have been extended downward nearly to the bottom of the cover and the attaching flange is continued around the upper

addition to being securely spot

welded in place, two rivets secure each reinforcement to the side walls of the cover near the bottom. Bulging of the side walls of the cover is thus prevented and equal pressure on the gasket around its entire periphery is insured. The valve rocker cover gasket has been increased in thickness and the four separate pieces comprising the gasket are securely held together by eight

wire clips which are bent over. Thus the four component pieces are attached together so as to form an integral gasket which insures a more effective seal and facilitates handling in service.

THE REPORT OF THE PERSON OF TH

PISTON RINGS

The pressure exerted on the cylinder wells by the piston rings has been increased, insuring more effective scaling against blow-bys and oil leakage.

PUSH RODS

The valve push rods have been redesigned to make possible their manufacture by the swaging or upsetting of a rod. With this method of manufacture it is possible to eliminate the separate ball socket which was previously used at the upper end of the rod. This spherical socket is now integral with the rod.

Thus one joint in the valve train is eliminated; and with its elimination the possibility of wear and the noise resulting from wear are reduced.

The lower end of the push rod is also enlarged in diameter by upsetting. This provides greater area at the point of contact between the push rod and the conical seat in the tappet. Both of these improvements in design tend to make valve adjustments necessary at less frequent intervals.

WATER PUMP

The auxiliary vanes on the rear face of the water pump rotor are reduced in outside diameter. By this means the forward thrust pressure of the rotor is reduced. This improvement in the water pump rotor tends to increase the life of the thrust washer. The packing arrangement and the means for lubrication are retained without change.

VALVE SPRINGS

Early in the 1930 season the valve springs were redesigned. Coil springs are usually made with a uniform pitch from coil to coil. Extensive engineering research proved that by graduating the pitch, making the coils closer together at the ends and farther apart at the center, several advantages are obtained. This

> variable pitch reduces the amplitude of the spring surge more than 35 percent and increases the frequency of wibration to a rate which is not likely to be encountered in normal engine operation. The

pressure exerted by these springs was also increased to 44 pounds with the valve closed and 80 pounds with the valve open. With these springs secure closure is assured and spring vibration is eliminated.

AIR CLEANER AND FLAME ARRESTER

The centrifugal air cleaner has been replaced by a combination air cleaner and flame arrester. All air which enters the carburetor must pass through a filter element made of fine copper

mesh finely woven into a disc one inch thick. This unit is saturated with a light oil. Any particles of dirt in the incoming air are caught by the film of oil on the copper mesh and are prevented from entering the carburetor. Any flame which may be caused by a back-

fire through the carburetor is prevented from reaching the open air by this same copper mesh unit which functions much as a miner's lamp, preventing ignition of oil on the engine parts and resulting fires.

CRANKCASE VENTILATOR AND OIL FILLER

The crankcase ventilator is entirely new in design. It is combined with the oil filler and is provided with an oil separator. This unit is pressed into a hole on the left side of the crankcase toward the front. The oil filler tube is housed in the ventilator body, which completely surrounds it, forming an outer chamber. The crankcase fuses are exhausted through 48 holes in the upper side of the inner tube into the outer body. From this point

the fumes are drawn downward through

a pipe extending below the engine underpan. Suction is created by the air rushing past the end of this pipe. Any oil which may be held in suspension with the crankoase fumes is separated



the many holes and is returned to the case. The opening at the upper end is enlarged to the diameter of the body. This provides a larger hole for

pouring oil into the crankcase and makes this operation easier. The gasketed cap which covers the opening is attached by two cam surfaces pressed in the sides of the body.




	1930	1931
Nutch Housing	Stamping & Casting	Casting.
lywheel Underpan	One piece Stamping	Three stampings separately removable.
farmonic Balancer	Separate Spring Cages	Broached holes in weight.
Tlywheel	Cast Iron	Cast Iron with steel ring gear.
Spark Plug type	0-14	0-12
Carburetor Accelerating Cump Closure	Metal Cover	Rubber Boot.
Talve Rocker Tover.Gaskets	Four separate pieces 3/32* thick	Clipped together 1/8° thick.
Push Rod type	Composite	One piece upset.
Valve Spring type	Uniform pitch	Variable pitch.
Valve Spring pressure-open	62#	80#
Valve Spring pressued-closed	41#	44#
Plain Piston Ring pressure	8# to 10#	8# to 11#
011 Control Piston Ring pressure	7∳ to 9∳	8# to 11#
Air Cleaner	Centrifugal	Copper mesh.
Flame Arrester	Fone	Copper mesh.
Crankcase	Through	Through



Clutch

The operation of the clutch is improved by the adoption of many refinements in design. The bronze bushing in the rear end of the crankshaft which forms a pilot for the spline shaft on

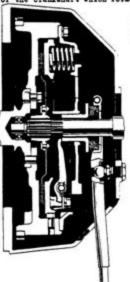

which the clutch disc slides is replaced by a high grade New Departure ball bearing. This bearing is of the "oil shield" type, and is packed at the time of assembly with a grease having a high melting point. No further lubrication is required. This bearing combined with the other features insures perfect alignment and smooth, noiseless operation.

The clutch fork is mounted on a spherical swivel, which is retained in the fork by means of a spherical stamping and enap spring. The swivel ball is screwed in a special shoulder-stud in the clutch housing. By means of this spherical mounting, alignment of the clutch release bearing is maintained because the bear-

ing is free to find its own point of alignment without binding.

The release bearing is made of a carbon-graphite composition clamped in a trunnion collar mounted in the fork. The face of the bearing is relieved to permit liberation of particles of carbon which may wear off.



The clutch is operated by the pedal acting through a stamped lever which is adjustable in relation to the pedal position. Pedal motion is transmitted to the clutch fork through this lever. The pecals are mounted on a shaft which is provided with flats at its end. It bears in a two bolt bracket which, with the bolt through the shaft, forms a more rigid mounting which lends itself to economical production.

> The clutch facings are solid-moulded rings secured to the disc by rivets.

The disc is depressed at four points to insure gradual engagement. The entire disc assembly is carefully tested for balance and runout.

After the springs and levers are assembled, the face of the pressure plate is carefully machined and polished to eliminate distortion due to spring pressure. The face of the flywheel is also polished. These refinements increase the life of the facings and insure smooth engagement. Provision is made for easy access of the clutch for inspection and lubrication, by removal of the cover plate in the toe board and the inspection cover on top of the clutch housing.

Comparative Specifications

Clutch Facings Clutch Pilot Bearing Clutch Fork Mounting Clutch Release Bearing

1930 Toven

Bronze Bushing Yoke Bracket and Pin Spherical Pivot

Carbon Graphite Plain surface

1931 Moulded

Ball Bearing

Carbon Graphite Grooved surface.



Transmission

The transmission case is provided with four sturdy lugs at its front face, by means of which it is externally bolted to the



clutch housing. With this arrangement, the transmission may be assembled and disassembled without removal of the clutch housing. Because the attaching bolts are located considerably farther out the mounting is much more rigid.

A pilot of large diameter, accurately machined insures perfect alignment of the clutch and transmission, permitting the gears to remain in mesh under all conditions of operation.

The second speed countershaft and sliding gears are made from nickel-molybdenum alloy steel. These gears are carefully carburized to produce a very hard surface on the wearing faces of the teeth backed up by a very tough core. Maximum life and minimum wear and breakage result from the use of this high-grade alloy steel and its proper heat treatment.

Comparative Specifications

1930


1931

Transmission Case mounting Second Speed Gear material Internal Bolts Chrome Vanadium steel External Bolts Fickel Molybdenum steel

Second Speed Gear treatment

Cyanided

Carburized.



The steering mechanism has been completely redesigned. It is of the worm and sector type having a reduction ratio of twelve to one. The worm is machined from steel bar and is carburized to obtain good wearing qualities combined with toughness. It is attached to the steering shaft by means of eight splines. The ends of the worm run in two tapered roller bearings. The sector



is forged integral with the pitman arm shaft from nickel-molybdenum alloy steel carburized. It runs in a bronze bushed flange which is ad-

justable in relation to the case and worm by means of an eccentric shouldered screw and an eccentric sleeve. Lubrication is provided by a single Alemite fitting, from which the lubri-

cant is conducted to all bearing points. The pitman arm is secured to the sector shaft by the usual serrations.

With this improved steering mechanism it is possible to control the car with less effort than heretofore, because of the increased ratio and high grade anti-friction bearings.

The bushing in the upper end of the mast jacket in which the steering shaft bears has an outer shell of soft rubber with an intermediate shell of hard rubber lined with graphited fabric.



Noise and road shocks are eliminated and easy steering is assured. The horn wire is inserted in a hole which runs longitudinally through the shells and is soldered to a brass contact ring which is embedded in the upper face of the bushing. The beautiful new

steering wheel is of hard rubber

molded on a strong steel frame,

It has three spokes which afford a more comfortable position for the hands and unobstructed view of the instruments. The rim is of the popular
thin elliptical section with grooves

on the top side and finger grip scallops on the bottom. The polished rustless iron hub cover and large hard rubber horn button complete the clean-cut, sturdy design. The satin black finish of the rubber lends a rich appearance and the feel of the rubber is very confortable.

Comparative Specifications

	1930	1931
Steering Gear type	Worm & Wheel	Worm & Sector
Steering Gear ratio	9.5:1	13:1
Steering Gear adjustment	Shime	Eccentric
Steering Worm Bearings	Ball	Tapered Roller
Steering Theel construction	Pressed steel spider, wood rim, rubber covered spokes.	Hard rubber steel reinforced.
Steering Theel Snokes	FOUT	Three



Wire wheels will be furnished as standard equipment on all passenger models. The hubs are very large in diameter, of the

concealed bolt type. The hub caps are chromium plated with a black ring surrounding the Chevrolet emblem in the center. The spokes are made of high grade open hearth steel wire with low carbon content, upset to form heads and shoulders. They are riveted securely to the drop-center rim, which has a width of three inches. The 4.75 -

19 tires are seated on a fabric liner which is shellaced to the rim to protect the tire tube from abrasion. The wheels are finished in attractive colors which harmonize with the body colors.

Comparative Specifications

1930

1931

Theel type

Disc

Wire

Rime Demountable


Permanent Drop Center.



The entire line of fenders, splash guards and aprone is redesigned to harmonize with the body appearance. At all points where squeaks or rattles might occur, the sheet metal parts are insulated from adjacent metal parts by anti-squeak fabric.

FROST FENDERS

The front fenders
are improved in appearance by the reduction
in depth of section at
the forward end. This
lends a lighter and finer appearance when viewed from the front and side.



The rigidity of the front fender iron is increased consider-

ably by the addition of stiffening flanges 1/4 inch wide extending upward from the frame end 11

inches. At the points where the head-

lamp tie bar and fender are attached, the fenderiron is embossed to insure proper contact.

HEADLAND TIE BAR

The headlamp tie bar is a solid steel upset forging of slender, graceful design. The section of the central portion is round, blending into sturdy flanges at its ends. It is arched upward in a graceful curve and is beautifully finished in bright chromium plate. Sockets are provided at each side for headlamp sounting. The tie bar serves to tie the fenders securely together





and provides an ideal mounting for the license tag, headlamps and horn. Two chromium plated clips are provided to attach the license tag to the headlamp tie bar. These clips are designed so as to grip the bar firmly and prevent sliding of the tag.

RADIATOR SPLASH GUARD

The radiator splash guard is completely redesigned. A single stamping extends below the radiator and below the inside of the side rails. Two separate ledges are mounted on top of the



side rails concealing the edges of the splash guard proper. The panels which are pressed into the three vertical faces of the splash guard not only add to the beauty but tend to increase the stiffness. Both the splash guard and the ledges are attractively crowned and are beautifully finished in durable black enamel. THIVROTTE

Rubber insulation at the mounting points on the frame prevents squeaks and rattles.

HOOD

The length of the hood is increased, and the crown of the upper panels is more pronounced. The side hinges are raised to coincide with the moulding line. The moulding is nerrow and



is designed to conceal the hinge.

The number of louvres is increased and they are punched in a raised panel toward the rear of the hood.

Each louvre is narrow and shallow, the sir capacity being maintained

by depressing the front edge of each opening.

The new hood is considerably stiffer and, due to the novel treatment of mouldings and louvres, appears longer then it actually is. The bood catches are attractively finished in chronium.

RUNNING BOARDS AND APRONS

The running boards are longer and wider at the front end. They are made of pressed steel, fully covered with corrugated rubber moulded in place, the rubber extending over the rounded



outside edges. Marrow chromium plated moulding is applied around all exposed edges. A channel section reinforcement is welded longitudinally between the hold-down plates to increase the rigidity. The rubber covering with the bright mouldings presents a neat, distinguished appearance and the additional width allows more foot room when entering or leaving the car.

The running board aprons are designed to conform to the new body lines and sill treatment. They follow the contour of the body and appear to be a continuation of it. The design is extremely plain without any panels or beads to break up the long flowing lines. The concavity at the front end of the aprons also allows more foot room.

REAR FENDERS

The rear fenders are redesigned to conform to the new lines of the body and other sheet metal parts.

The sweep at the rear end is somewhat more pronounced and provisions have been made to fill the

space between the fenders and the rear cross member cover.

REAR CROSS MEMBER COVER

The appearance of the rear end is improved to a considerable extent by the new rear cross member cover. It is exceptionally



clean in appearance and has a beed around its lower edge and around the rear panel. This panel bead blends into a dividing bead through the middle. The ends have a raised panel which is slightly crowned. The rear panel extends downward to entirely conceal the fuel tank and is depressed for spare tire clearance. The cover extends downward over the sides of the frame to meet the rear fenders and effectively fill the space at this point. The beautiful black enameled finish of the cover is set off by the chromium plated fuel tank cap which has a plain crowned top with a knurled bead.

Comparative Specifications

	1930	1931
Front Fender Iron section	Channel	Channel with stiffening flanges.
Headlamp Tie Bar	Channel section stamping	Round section forging.
Headlamp Tie Bar finish	Black enamel	Chrome plate.
Front License Tag Mounting	Bolts through tie bar	Clips.
Radiator Splash Guard	Horisontal	Vertical
Hood	Wide louvres	Farrow louvres on raised panel.
Hood Catches and Handle	Cadmium plated	Ohrone plated.
Running Board Mouldings	Black	Chrome plated.
Running Board Reinforcement	Tone	Channel section.
Running Board Apron	Beaded	Plain.

Electrical System

The entire electrical system is improved and refined. Much attention has been given to the design of the component units, which results in the elimination of many minor troubles.



BATTERY

The majority of the batteries furnished in 1931 cars will be of the flush - connector type. In this type of battery the connectors are embedded in the insulating material in the top of the battery. This provides a smooth, flush top with only the cell caps projecting, which fa-

cilitates cleaning of the battery and its terminals.

WIRING HARNESS

The wiring harness has been improved in several minor details, all of which tend to eliminate failures. The headlamp wires are carried in a separate metal conduit which increases their life and prevents unintentional disconnection of same.

HEADLAND

The headlamps are of graceful perabolic shape, having two shallow crowned beads at the front. The body and rim
are made of brass, beautifully chrome
plated. The popular double filament bulb
and anti-glare lens are retained. The lamps
are adjustably mounted on the tie bar. On the models not equipped with cowl lamps, a parking bulb is provided in each headlamp.



COWL LAMPS

On sport models chromium plated cowl lamps, similar in shape to the headlamp, are furniched. These lamps are mounted on attractive brackets which fit the cowl. A stud through the cowl with a nut on the underside holds the lamp in place.

TAIL AND STOP LAMP

The tail lamp and stop lamp are combined in a beautiful chromium plated casing of elliptical shape. The door is also chromium plated and is attached by two screws. The lamp is attached to a pressed steel, black enameled bracket of elliptical chammel section which is mounted on the left hand rear fender by a triangular flange. The tail



lamp bulb protrudes through the lamp casing, illuminating the license tag directly without the dimming effect of the usual glass window. The tail lamp lens in the lower half of the lamp casing is a ruby "Filmolens" which is combined with an inserted pyralin condensing lens in the upper half for the stop signal which is illuminated by a separate bulb. The stop light is controlled by a switch mounted on the frame side rail. The switch is actuated by a lever clasped on the brake cross shaft, which is adjustable. The slightest movement of the brake pedal illuminates the stop light. The rear license tag is mounted on a cross bar attached to the tail lamp bracket below the lamp.

HORK

mounted just below the left hand headlamp.


The body of the horn is black with an attractive chromium plated ornamental face plate.

The tone is pleasing but insistent. In operation, this type of horn is very durable; wa-

ter, ice and snow having no effect on its efficiency.

INSTRUMENTS AND CONTROLS

The four buttons for spark, throttle, choke and light controls made of black molded Bekelite with white letters and a white line rim on their faces. The control rods have a number of annular grooves into which the Bakelite is permanently molded.

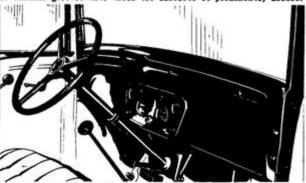

The vibration of the oil gauge mand is eliminated by the addition of a friction device in the gauge mechanism. The tube leading to the oil pressure gauge is reduced to 1/8 inch diameter which also tends to reduce vibration.

A balancing member has been added to the gasoline gauge to prevent vibration of the hand. The tank unit has been improved by the redesigning of the coils and contacts. All of these refinements tend to make the gauge indicate more accurately the amount of fuel in the tank.

ELECTROLOCK

The ignition system is locked by means of the Electrolock unit which has been improved in design to insure clearance of the speedometer and to prevent rattling of the lock tumblers. The latter effect is accomplished by an increase in the length of the lock pin. The speedometer clearance is obtained by changing the position of the Electrolock unit in the instrument panel by rotating it 45 degrees.

WINDSHIELD WIPER

The windshield wiper is improved by the addition of means for ventilating and draining the housing. This prevents formation of ice on the mechanism. The windshield wiper is controlled by a lever in the header panel. The wiper blade automatically returns to the extreme position when the valve is closed.

The windshield wiper suction pipe is made in two halves, connected by a section of non-metallic loom which insulates the body from engine noises which might be transmitted through a solid metal tube. Automatic windshield wipers are furnished as standard equipment on the open passenger models.

Comparative Specifications

Headlamp and Teil Lemp finish Black and Chrome
Tail Lamp Mounting On tire carrier

1931 Full Chrome On fender

Tail Lamp Mounting Horn

Motor driven

Vibrator.



Hudiator

The radiator is improved both in appearance and efficiency. Due to the new treatment of the radiator shell and splash guard the frontal appearance is very different. The shell is made of brass, in two balves, both of which are beautifully chromium




plated. A black enameled, beaded panel at the bottom surrounds the starting orank hole. The new radiator design appears to be much higher and the sides appear to have more curvature. The upper panel is somewhat narrower and has greater curvature at the rear edge. The

starting crank hole is surrounded by a chromium plated ferrule and is provided with a crowned, chromium plated spring cap.

The cooling element consists of 34 sections of 3/6 inch Harrison hexagon core with brass tubes and short copper fins, which is considerably more effective. Where unusual conditions of climate or altitude overtax the capacity of this standard radiator core, the truck core may be had at additional cost. It consists of 36 sections of 5/16 inch Harrison hexagon copper core of the short-fin type.

The radiator cap is of the spring and cam type, large in dianeter and beautifully chronium plated. The operation of the cap is very easy because only a portion of a turn is required for engage-

screen is furnished as standard equipment. It is attached to the radiator shell at the name plate fastener near the top and by two "T" bolts at the bottom. Rubber bumpers are provided at the eides to space the screen from the radiato: shell. At the starting

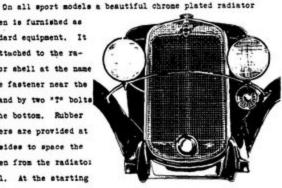

crank hole a beautiful chrome plated ferrule is provided.



Comparative Specifications

	200	
Radiator Core material	Brass	Copper
Number of Core sections	30	34
Type of Radiator Cap	Screw	Spring & Cam
Starting Crank hole	In Splash Guard	In Radiator.

Wire Wheel Carrier

A sturdy carrier for the spare wire wheel is provided at the rear on all models with which five wire wheels are furnished. A

rigid channel section member bolts to the rear cross member and is braced by a channel section brace member mounted on top of the rear cross member. Three stude are provided for attachment of the spare wheel.

On models with which six wire wheels are furnished as standard equipment, a fender well is provided on each side to carry the spare wheels. Sturdy braces secure the fender wells to the frame. These in com-

bination with the step hanger tie bar provide rigid support for the fender wells and reduce deflections due to the weight of the

spare wheels and tires to a minimum. Anchorage of the spare wheels is by means of rods attached to reinforcements in the fenders, braced by rods attached to the dash and passing through rubber grommets in the cowl. The vertical rods are threaded and "T" handles are provided to hold the retaining clamps in place on the tires. The handles and clamps are chromium plated.





In redesigning the entire line of open and closed bodies, every effort has been made to improve their appearance and to increase their comfort.

The sill has been lowered to extend below the frame line. This permits the lower side panels to be deeper, tending to make the body appear lower.

The instruments are surrounded by an attractive, raised

bead; and the entire panel is set farther forward in relation to the cowl rail. A narrow cowl moulding, beautifully chrone



plated, is applied to all models. Insulation is provided on the dash and under the front floor mat to prevent engine noise, heat and fumes from entering the driving compartment.

All bodies are attractively finished in duco, striped with hermonizing colors.

OPEN BODIES

On all of the open bodies an automatic windshield wiper is now furnished as standard equipment instead of the hand operated type which was previously supplied. The beautiful, durable Fabrikoid door panels which replace the usual coated ragboard panels are an outstanding improvement in the open body line. All doors are provided with weatherstrips to exclude wind and rain. The top bows are made of oak in natural wood finish. They are bolted to slat irons finished in body color. am year to

The top bolder is also finished in body color and is equipped with an attractive, colored, leather strap with a plated buckle. The trimming in the open bodies is of Fabrikoid in attractive color, arranged in narrow plaits. Both front doors are equipped with pockets.


ROADSTER

The lines of the roadster body are entirely new. The body is wider at its front end, and two inches longer. The additional length is in the deck compartment, which is also increased in height. The moulding line is continuous from the front of the hood to the rear of the deck, which greatly improves the appearance. The deck with its new flush door and broader appearance is also more beautiful. The top has been changed in design to appear much narrower and more rakish.





The phaeton body is 2 inches longer and 1 3/4 inches wider at the front end. The rear seat is more comfortable because of its increased rake. The tonneau is equipped with a robe rail and a foot rest of the same type furnished in sedan bodies. The tonneau floor is covered with carpet. The top is of fabric which harmonizes in color with the body and trim. A top boot is furnished as standard equipment.

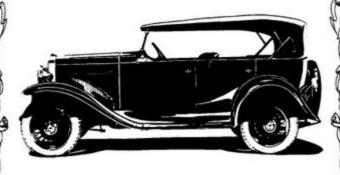

SPORT ROADSTER

All of the features in the roadster are also incorporated in the sport roadster. The increased length and height of the deck compartment provides more knee room in the rumble seat and also makes it more accessible. This model is equipped with two attractive rubber faced step pads, beautiful chrome plated cowl lamps and radiator screen.






CLOSED BODIES

In all of the closed body models, the sills are made of twoply oak. The paneling is redesigned to increase the rigidity of the body and to facilitate welding. The front pillar is stamped integral with the cowl side panel, eliminating the unsightly open joint at the junction of the cowl and upper pillar.

An outstanding feature is the increase in vision under the windshield header bar. This is accomplished by raising the header





bar and lowering the front seats. The accompanying sketch shows the relative increase in vision.

In the new bodies the sloping windshield is retained; Sut with the new stamped front pillar there is considerably less obstruction to clear vision at the corners. The front pillar is well reinforced and is stamped integral with the cowl side panel.

All body mouldings are pressed in the body panels, eliminating all separate, applied mouldings with their accompanying
difficulties. The drip moulding is also pressed integrally in
the roof panels. With the adoption of these pressed mouldings
the rusty streaks, usually found at the edges of applied mouldings are eliminated because the paint does not crack off of the
pressed mouldings. The lower windshield moulding is also pressed
in the cowl panel, eliminating the leaks at this point.

The belt line on all closed bodies is raised to further carry out the low appearance caused by the deeper body side panels which have a slight outward bulge. The roof lines are improved by streamlining and by an increase in crown at the front. All window reveals are concave and the back window is longer and elightly narrower. The upper door hinges are narrower and much neater in design.

The dash is strengthened at its junction with the dash lege. Three rivets are added in each leg to reinforce the spot welding. The toe risers are also strengthened by an increase in their section; and they are attached to the sills by screws instead of nails. The hood ledge on the cowl is redesigned to prevent squeaks caused by contact between the hood metal and the cowl. Body squeaks are eliminated by the further use of steel brackets at the highly stressed joints in the frame work.

The cowl bar has an attractive depressed panel; and the instrument panel sets farther forward in relation to it. All of the body hardware is narrower and neater in design. All of the







exterior hardware is chrome plated and the interior hardware is nickel plated. All rear doors and left hand front doors

are arranged so as to lock by slightly lifting the inside handle.


Mohair and broadcloth trimming material are optional on closed body models. The sent oushions have two rows of buttons.

COACH

The coach body is wider at the rear seat. The additional width is obtained by improving trim construction without sacrificing any actual trim depth.

Both front seats are of the "bucket" type, with the curved back permanently attached to the seat. This type of seat is much more comfortable than the folding type due to its permanent back construction. The entire seat is hinged at the front.

A compartment for tools is provided under the floor board beneath the front seats. This permits access to the tools for making adjustments, tire repairs, etc. without disturbing the occupants of the rear seat.

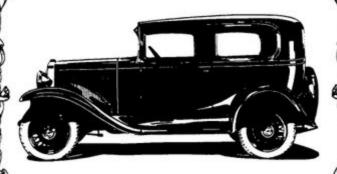




The sedan body is 1 1/2 inches longer and 1 inch wider.

The rear seat is considerably roomier because of improved trim
structure. The trim depth is maintained. The rear compartment
is beautifully carpeted and is equipped with a foot rest and
robe rail.




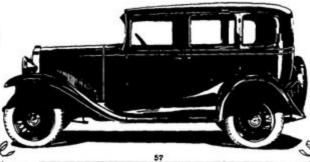

SPECIAL SEDAN





The special sedan is equipped with six wire wheels, the two spare wheels being mounted in the fender wells. Chrome plated cowl lamps and radiator screen are furnished and the rear compartment is equipped with two ash receivers, two arm rests and two assist cords. All of the rear compartment windows have silk roller curtains of harmonising color.

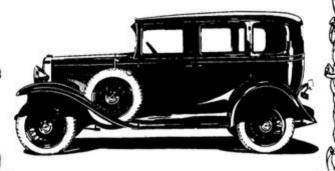



The coupe is built in two types. One has three windows and the other has five windows. Both of these coupe bodies are two inches longer and more roomy because of the improved trim construction. The spacious rear deck compartment has its flush door hinged at the front. The chrome plated handle has a lock built in.

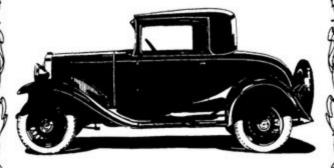

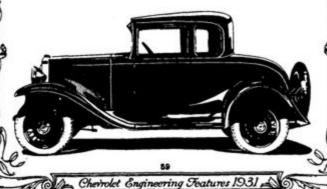





SPORT COUPE

The sport coupe has five windows and a rumble seat.

The increased length of the rear compartment adds to the comfort of the rumble seat. Chrome plated cowl lamps and radiator screen are furnished as standard equipment.

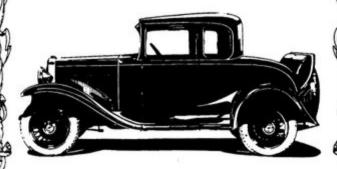

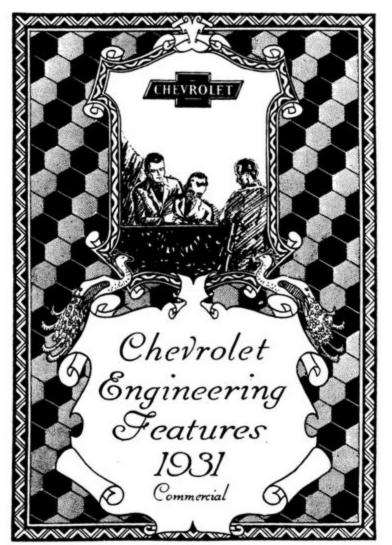




The commercial line includes a Light Delivery, a Roadster Delivery, a Sedan Delivery, a 1 1/2 Ton Truck and a Heavy Duty Truck. The Light Delivery chassis is similar to the passenger job except that it has heavier springs and the fuel

tank is mounted under the seat.

The Sedan Delivery is built on the passenger chassis with a panel body having a closed front compartment.






The 1 1/2 fon Truck chassis has a wheelbase of 131 inches and is equipped with single disc wheels. The Heavy Duty Truck chassis has a wheelbase of 157 inches and is equipped with dual rear wheels.



The frame in the 131 inch chassis has been strengthened by the addition of channel section reinforcements inside of both side rails between the second and third cross members. These reinforcements are riveted to the upper and lower flanges and to the webs of the side rails.

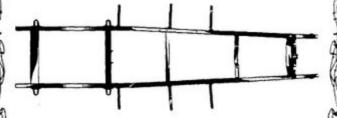

The second cross member has been completely redesigned. It is wider, deeper and of channel section with stiffening flanges at the bottom. This cross member also serves as a support for the fuel tank.

The 157 inch frame is much heavier and stronger than the shorter.job. The side rails are 7/32 thick and have a depth of 7 inches with flanges 2 3/8 wide. An additional cross member is introduced, which not only serves to strengthen the frame structure but provides a means for mounting the propeller shaft support. This cross member is of channel section with wide gussets at its upper and lower flanges.



Comparative Specifications

	1930	1931 (131.)	1931 (157*)
Side Rail depth	6	6	7
Side Rail width	2 1/4	2 1/4	2 3/8
Side Rail thickness	5/32	5/32	7/32
Side Rail Reinforcement	None	1/8 channel	None
Number of Cross Members	5	5	6
Second Cross Member Section	Angle	Flanged horisontal channel	Vertical channel
Fourth Cross Member Section	None	None	Horizontal

Front Axle

A heavy duty front axle has been provided for the trucks.

This includes heavier and stronger I beam, steering knuckles, steering arms, king pins and thrust bearings.


Comparative Specifications

1930

*	A-100	
I Beam section at center	1 3/4 x 2 7/32 web	2 x 2 1/4 5/16 web
I Beam section at outer end	1 7/16 x 1 13/16	1 3/4 x 1 13/16
I Beam material	#1035 steel .	#1045 steel
I Knuckle diameter at inner bearing	1 3/16	1 5/16
King Pin diameter	.733	.921
Number of balls in thrust bearing	14	16
DV		(1

Rear Axle


The outer end of the rear axle has been redesigned to make provision for dual wheel equipment and to incorporate 16 inch internal brakes.

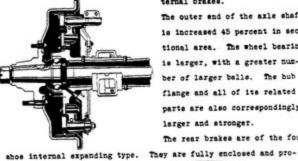

The outer end of the axle shaft is increased 45 percent in sectional area. The wheel bearing ie larger, with a greater number of larger balls. The bub flange and all of its related parts are also correspondingly larger and stronger.

The rear brakes are of the four

tected from water and dirt. As in the passenger brakes, the upper and lower shoes are used for service braking and the two short, front choes for parking. The long service shoe is most effectfive for forward braking and the short service shoe for reverse braking. The shoes are similar in

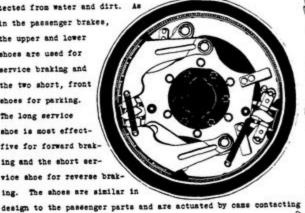




poller sectors. The long shoe is articulated and the short shoes


are pivoted. The brakes are adjustable by means of screws threaded into sleeves mounted in the two-piece stamped operating levers. movement of these screws changes the angular relation between the operating levers and the involute-faced adjusting levers.

All vital parts of the brakes which are exposed to the weather are protected by cadmium plating.

The rigidity of the brake drums has been increased by the addition of a stiffening flange one inch wide.

Comparative C	Specifications	
/-	1930	1931
Axle Shaft:		
Diameter at small end of taper	1.410	1.772
Diameter inside of bearing	1.670	2.000
Wheel Bearing:		
Inside dismeter	1.772	2,165
Outside diameter	3.937	4.528
Width	.984	1.063
Diameter of balls	21/32	23/32
Number of balls	13	13
Service Brakes:		
Туре	External contracting	Internal expanding
Diameter	12 1/2	16
Operation	Lever	Cam
Lining type	Woven	Semi-moulde
7		0

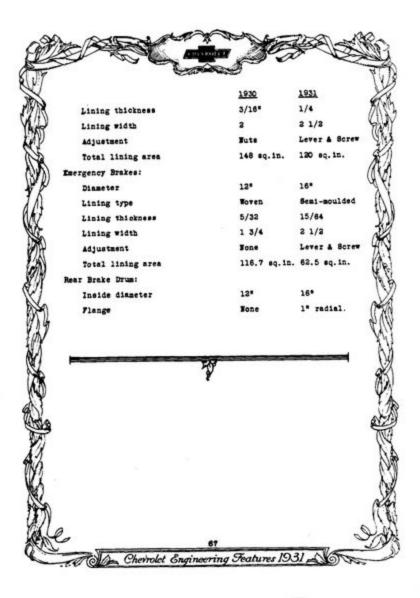

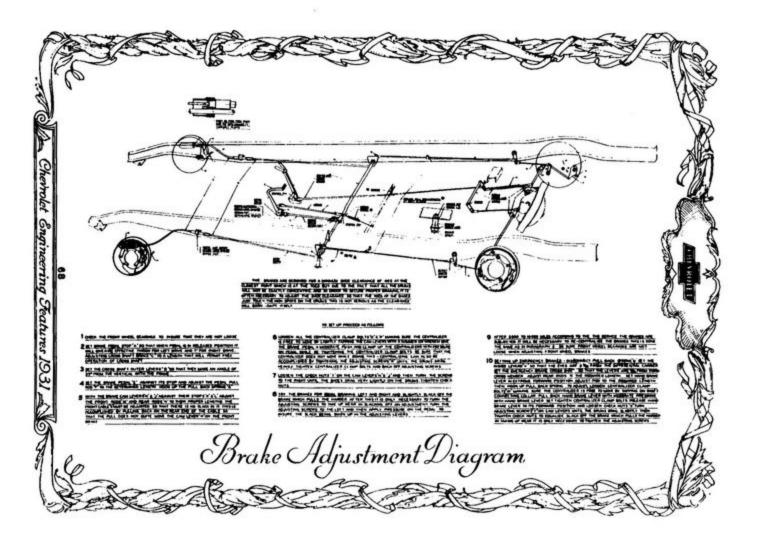



Clutch

The truck clutch was increased in size and capacity during the 1930 season. The outside diameter of the facings is ten inches. The clutch facings are changed from the woven to the moulded type.

All of the improvements in the passenger car clutch previously described are also reflected in the truck clutch. The increased diameter combined with the ball bearing pilot, the swivel throwout fork mounting and the improved throwout bearing make this important unit of ample proportions and quality for heavy duty use.



Comparative Specifications

1931


	¥9.30	Avox
Clutch Disc outside diameter	94	10*
Clutch Disc inside diameter	6 1/4*	6 1/4*
Total Clutch friction surface	65.9 sq.in.	95.7 eq.in.
Clutch Facings	Woven	Moulded
Clutch Pilot Bearing	Bronze Bushing	Ball Bearing
Clutch Fork Mounting	Toke Bracket and Pin	Spherical Pivot
Clutch Release Bearing	Carbon graphite. Plain surface.	Oarbon graphite. Grooved surface.
a		

Cherrolet Engineering Teatures 1931



Propeller Shaft

In the heavy duty truck with 157 inch wheelbase, the additional propeller shaft length is provided by a separate forward shaft unit. This unit makes up the difference of 26 inches in wheelbase, permitting the use of the same rear axle assembly on both types of trucks.



The front end of the propeller shaft extension is splined to fit the standard universal joint yoke on the rear of the transmission. At the second cross member, the extension shaft is connected to the rear axle third member by an additional universal joint. This joint is enclosed in a spherical housing resiliently mounted on the second cross member. The forward yoke of this joint runs in a ball bearing. An Alemite fitting is provided for lubrication. The lubricant is retained by packing rings in the two ball joint collars.

The forward end of the shaft runs in a bronze bushing, doweled into a tube which completes the closure of the unit.

Wheels

On the Light Delivery and Roadster Delivery, disc wheels with demountable rims and 4.75 - 19, 4 ply tires are furnished. The Sedan Delivery is equipped with wire wheels the same as those furnished on passenger models. On 1 1/2 ton trucks, which are equipped with single wheels, solid disc wheels are furnished.



The front tires are 30 x 5, 6 ply; and the rest tires are 32 x 6,

for use on the rear wheels.

All single wheel jobs
have demountable rims.
On heavy duty, dusl
wheel trucks 30 x 5, 6
ply tires are furnished
on both front and rear
wheels. They are mounted
on disc wheels which are

8 ply. 32 x 6, 10 ply tires are

demountable at the hub.

The discs have five triangular

holes to reduce their weight and to permit access to the curved tire valve stem. The rims are per-

manently riveted to the discs, and
the tires are held in place by
clamp rings. The six discs
are interchangeable. By
means of two special, externally threaded nuts, the
rear outer disc may be removed without disturbing
the inner disc.

The inner front wheel
bearings are increased in size
on all trucks. On dual wheel trucks
the front hub cap is externally threaded into the hub.



The cooling element of the 1 1/2 ton truck radiator consists of 36 sections of 5/16 inch Harrison hexagon copper core. This core is of the short-fin type and is considerably more effective. The improved four-bladed fan combined with the more effective radiator core insures adequate cooling of the engine.


A special high duty radiator core is supplied at additional cost for use where conditions of climate or altitude necessitate increased cooling capacity. The cooling element consists of 45 sections of 1/4 inch Harrison hexagon copper core.

The radiator shell is of the same beautiful shape as in the passenger line; but it is finished in black enamel. The filler cap is also of the cam and spring type.

Bodies

The cab for use with light delivery chasses and 1 1/2 ton trucks has been redesigned. The roof is a one-piece steel stamping, well reinforced and bolted to the framing. This roof is extremely durable and much stronger than the usual wood and fabric structure. The body is wider and the seats are also wider and more confortable because of their greater angularity. The doors

> are considerably wider, which improves the visibility. A rubber toe and floor board mat is furnished.

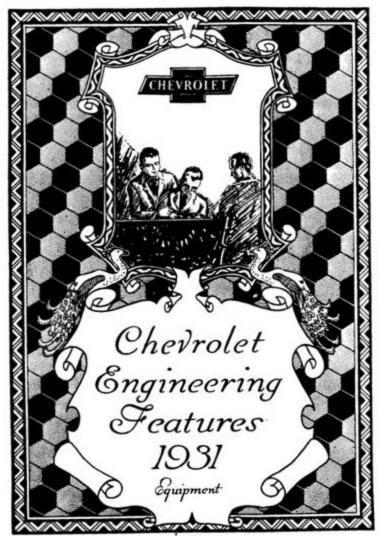

TWO-STAGE SPRINGS

Special springs are provided for use on the trucks under conditions where the trucks are called upon to carry loads having a wide variation in weight. When carrying light loads, only the upper portion of the spring is in action and as beavier loads are applied, the upper leaves deflect to such an extent that the lower portion is also brought into action. This dual action insures more uniform riding conditions at all times.

PENDER WELL WHEEL LOCK

A look unit is provided to prevent theft of the wheel and tire, when carried in the fender wells. This look assembles on the brace rod at its lower end; and while it does not contact the wheel, it interferes with its removal. In the unlocked position it may be moved out of the way. A rubber bumper has recently been added to the lock unit to prevent contact with the fender and consequent noise.

BUMPERS AND FENDER GUARDS

The appearance of the bumpers and fender guards is improved by a change in the design of the medallions and the impact bar



section. The medallions are elliptical in shape with a deep crowned section. They are finer and neater in design and are capped with rustless iron.

The impact bars are half-elliptical in section and appear much richer and finer. A full line of bumper equipment is provided, including full bumpers for front and rear as well as rear fender guards. All impact bars are chrome plated and the back bars are black enameled.



RADIATOR CAP

A beautiful, hinged radiator cap is again provided as an accessory. The ornamental design is generally the same. The internal mechanism is sturdier and more simple

in design. It attaches to the radiator by a cam and spring mechanism which is permanently locked to prevent theft.

The hinged cover is also secured by a can and spring mechanism.

SEAT COVERS

A complete line of seat covers is now provided as an accessory. These covers are made of durable material of pleasing pattern. Being designed especially for the job, they fit anugly and are easily detachable for cleaning.

TIRE COVER

A fabric tire cover of attractive Burbank material is provided. A steel ring at the outer edge makes the fabric fit smoothly and snugly over the tire. This cover matches the top material of the open jobs and is therefore particularly adaptable to these models.

Indox	555522
	PAGE NO.
-4-	29
Air Cleaner	1000 N
Arms Steering	30 30
Axle - Front, Passenger	
Arle - Front, Truck	64
Axle - Rear, Passenger	21
-8-	
Balancer	24
Battery	43
Bodies - Truck	72
Bodies - Closed	54
Bodies - Open	50
Body Bracket	16
Body Hardware	55
Body - Passenger	50
Boot - Carburetor Pump	26
Brake Adjustment Diagram, Truck	68
Brake Drum - Rear, Truck	66
Brakes - Truck, Rear	65
Bumper	74
Bushing - Mast Jacket	35
-0-	
Oab	72
Carburetor Pump Boot	26
Carrier - Wire Wheel	49



INDEX CONT'I

Clutch Housing	23
Clutch - Passenger	23
Clutch Pedal	33
Clutch - Truck	69
Coach	56
Commercial Line	62
Comparative Specifications - Clutch	33
Comparative Specifications - Clutch, Truck	69
Comparative Specifications - Engine	31
Comparative Specifications - Frame, Commercial	64
Comparative Specifications - Frame, Passenger	17
Comparative Specifications - Front Axle, Truck	64
Comparative Specifications - Radiator	48
Comparative Specifications - Rear Axle, Passenger	21
Comparative Specifications - Rear Axle, Truck	66-67
Comparative Specifications - Sheet Metal	42
Comparative Specifications - Spring Shackle	19
Comparative Specifications - Steering	36
Comparative Specifications - Transmission	34
Comparative Specifications - Theels, Passenger	37
Controls	45
Coupe	80
Cover - Rear Cross Member	41
Covers - Seat	75
Qover - Tire	75



INDEX CONT.D

	PAGE BO.
G CONT.D	Ų,
Oover - Valve Rocker	27
Cowl Lamp	44
Crankonse Ventilator	30 /
Crankshaft	24
Cross Member - Front	15
Cross Member - Rear	16
Orose Kember - Rear Engine Support	15
Cylinder and Case	22
Cylinder Head	26
-D-	
Deah	55
Disc - Clutch	33
Drafting	- 6
-1-	
Engine	22
Engineering - Chevrolet	3
Engine Specifications	31
Electrolock	46
Exhaust System	18
Experimental Laboratory	3-4
-1-	
Facing - Clutch	33
Features - List of	8-13
Tender - Front	38
	0

INDEX CONT'I

	PACE NO.	
E CORL.D		
Fender Quards	75	
Fender - Rear	41	
Fender Well	49	
Fender Well Look	74	
Flame Arrester	29	
Flywheel	25	
Frame Assembly - Passenger	14	
Frame - Commercial	63	
Frame Sections - Passenger	14	
Frame Specifications - Passenger	17	
Front Axle - Passenger	30	
Front Axle - Truck	64	
Front Gross Member - Passenger	15	
Front Fender Iron	38	
-9-		
Gasket - Valve Rocker Gover	27	
-8-		
Hardware - Body	55	
Harmonic Balancer	24	
Head - Oylinder	26	
Headlamp	43	
Headlamp Tie Bar	38	
Hood	40	
Horn	45	
Housing - Clutch	23	



	PAGE NO.
-I-	
Index	76-82
Instrument Panel	50
Instruments	45
Introduction	2
Iron - Front Fender	38
-x-	
King Pin Lock	20
-L-	
Lock - Fender Well	74
Lock - King Pin	20
List of Features	8-13
-¥-	
Mast Jacket Bushing	35
-0-	
Oil Filler	30
-P-	
Pedal - Clutch	33
Phaeton	52
Piston Rings	27
Propeller Shaft - Truck	70
Proving Ground	4-5
Pump - Water	28



DETID	
	PAGE NO.
	(
	75
	47
2. 2	48
	39
	72
	21
	65
	16
	41
	15
	41
	21
	51
	753
	40
_	
	48
	75
	58
	59
10	57
	38
	26
	53
	19
	6
	0

INDEX CONT.D

32000		PAGE NO.
1	CONTID	(
Springs - Two Stage, Truck		74
Spring - Valve		29
Steering Arms		ao /
Steering Mechanism		35
Steering Theel		36
Step Hanger Tie Bar		17
	-T-	
Tail and Stop Lamp .		44
Tie Bar - Headlamp		38
Tire Cover		75
Transmission		34
	-7-	
Valve Rocker Cover		27
Valve Rocker Cover Gasket		27
Valve Springs		39
Ventilator - Grankouse		30
Vicibility		54
•	-1-	
Water Pump		28
Theels - Passenger		37
Wheel - Steering		36
Theels - Truck		70-71
Windshield Wiper		46
Wire Theel Carrier		49
Wiring Harness	82	"3