

ADDED POWER

WITH

**4**

-CYLINDER

ECONOMY


LONG, WIDE,

DEEP

**8**

-CWT.

LOAD-SPACE

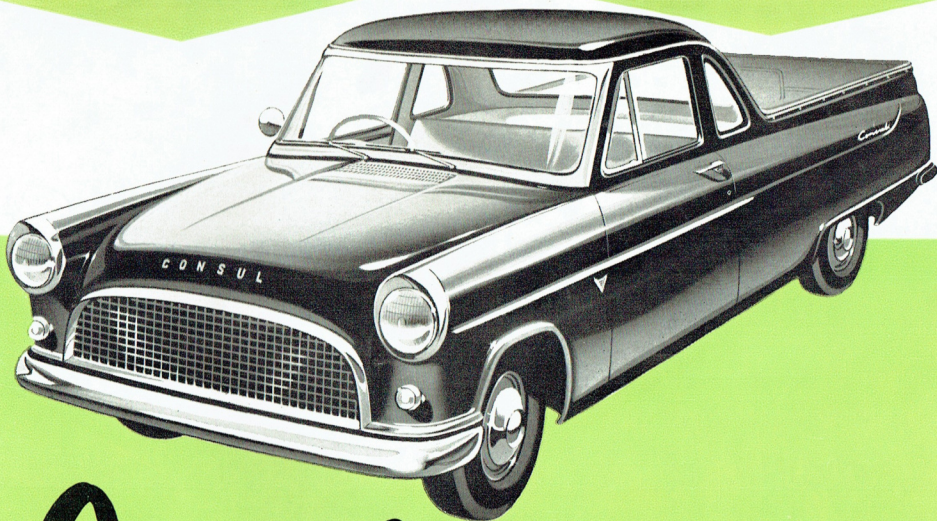

*Consul*

COUPE UTILITY

# Specifications **CONSUL COUPE UTILITY**

**ENGINE:** Four cylinder cast integrally with upper half of crankcase bore 3.25 ins.; stroke 3.13 ins. Capacity 102.9 cu. ins. Overhead valves, push rod operated from harmonic cams in cylinder block. Compression ratio 7.8:1. B.H.P. 59 at 4,200 R.P.M. Torque 92 lbs./ft. at 2,300 R.P.M. Three bearing crankshaft with integral weights, dynamically balanced. Detachable cast-iron cylinder head incorporating volume controlled combustion chambers for economy and smooth running. Special autothermic alloy pistons. Three point suspension of engine and gear box giving remarkably smooth power flow.

**ENGINE LUBRICATION:** Pressure feed by submerged gear pump to crankshaft main bearings, big end bearings and camshaft bearings via drillings in cylinder block and crankshaft. Full flow type oil filter fitted direct to cylinder block. Accessible dip stick and oil filter. Sump capacity with oil filter, 7.5 pints.

**IGNITION:** 12 volt battery and coil (battery accessibly located under hood)—distributor has automatic advance and retard and additional vacuum control. Sparking plug size 14 mm. Firing order 1, 2, 4, 3.

**FUEL SYSTEM:** Diaphragm type fuel pump mechanically operated. Down draught carburettor has special choke control and is fitted with combined air cleaner and silencer. Electrical petrol gauge. Petrol tank capacity 11 gallons.

**COOLING SYSTEM:** Belt driven fan and water pump with thermostatic heat control. Tube and fin type radiator. Capacity of system 18 pints.

**TRANSMISSION:** Clutch—dry single plate spring cushioned. Hydraulic operation from pedal to heavy duty, ball-bearing thrust release. Remote control of gears on steering column. Light action synchro-mesh on top and second gears. Helically cut constant mesh gears. Three forward speeds: Overall ratio—4.44 to 1, 7.29 to 1, and 12.61 to 1. Reverse 17.14 to 1. Oil capacity of gear box 2.5 pints approximately.

**REAR AXLE:**  $\frac{3}{4}$  floating, hypoid final drive. Heavy duty roller and ball bearings. Open type drive shaft. Universal joints have needle roller bearings. Axle ratio—4.44 to 1. Oil capacity 2 1/2 pints approximately.

**FRONT SUSPENSION:** Independent front wheel suspension employs low periodicity coil springs mounted on special hydraulic double-acting telescopic shock absorbers integral with the wheel spindle assembly. The upper end of this unit rotates in an anti-friction bearing suspended in rubber and mounted on the body high inside wing valance. The base of the wheel assembly is connected via a ball jointed transverse track control arm to a tubular cross-member bolted to underside of the unitary body. An anti-roll torsion bar is fitted which, being triangulated, holds the track control arms in the fore and aft direction, the wide spacing and high location of the springs and shock absorbers, combined with accurately controlled geometry, give excellent riding and steering.

**REAR SUSPENSION:** Longitudinal semi-elliptic 9-leaf springs rubber insulated. Hydraulic double-acting shock absorbers.

**BRAKES:** Hydraulic internal—front 9 ins. x 2 1/2 ins. Rear 9 ins. x 1 3/4 ins. Front—two leading shoes, rear—floating expander. Total lining area 147 sq. ins. Foot brake all four wheels, hand brake on rear wheels only.

**STEERING:** Recirculatory ball type. Ratio 18.0 to 1. Steering wheel diameter 17 ins. Two spoke safety type.

**WHEELS AND TYRES:** Pressed steel with wide base rims. Rust-less steel hub-caps. Tyres 6.70 x 13—6 ply.

**ELECTRICAL EQUIPMENT:** Two-brush ventilated generator, compensated voltage control. Drive "V" belt easily adjustable. Starter motor. Horn: high frequency, operated by button on steering column. Battery: 12 volt 57 amp. hr. at 20 hr. rate.

**INSTRUMENTS:** Conveniently grouped cluster immediately in front of driver includes speedometer, fuel gauge, temperature

gauge, oil pressure warning light, direction indicator warning lights, ignition warning light, head-lamp main beam warning light. Instrument lighting controlled by reostat incorporated in main lighting switch.

**CONTROLS:** Choke, combined ignition-starter switch, lighting switch, instrument light and windshield wiper. Plastic control knobs. Foot operated head-lamp dimmer switch.

**BODY:** All-steel welded integral construction. Safety glass all round. Curved type fixed windshield. Hinged no-draught ventilators embodied in front doors. Safety design push-button door handles. Adjustable, full-width tubular construction bench type seat. Washable vinyl headlining. Spare wheel housed in separate compartment beneath tailgate at rear.

**GENERAL EQUIPMENT:** Dual windscreen wipers operated from vacuum pump fitted on engine. Moisture-proof, flush fitting hooded head-lamps. Separate side lamps. Tail and stop lamps combined. Rear number plate illumination lamps. Interior light. Sun visors. Doors lockable on both sides. Approved flasher type direction indicators operated by self-cancelling arm on steering column. Exterior rear view mirror. Built-in fresh air ventilation system. Provision for fitting air-conditioning system, demisters and radio.


**GENERAL DIMENSIONS:** Overall length: 171 ins. Overall width: 67.5 ins. Overall height: 60.34 ins. Wheelbase: 104.5 ins. Track (front): 55 ins.; (rear): 52 ins. Turning circle: 38 ft. Kerb weight: 2,660 lbs. Maximum G.V.W.: 3,900 lbs.

Ford Motor Company of Australia Pty. Ltd., whose policy is one of continuous improvement, reserves the right, subject to such regulations as may from time to time apply, to change specifications and prices at any time without notice or incurring liability to purchasers.


## FORD MOTOR COMPANY OF AUSTRALIA PTY. LTD.

(Incorporated in Victoria) Registered Office: Geelong, Victoria

D/M30 59

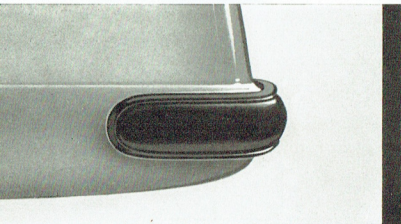

**REAR END PROTECTION.** Rubber-faced bumperettes curve right around the vital rear corners, absorb shocks better and do not show scratches.

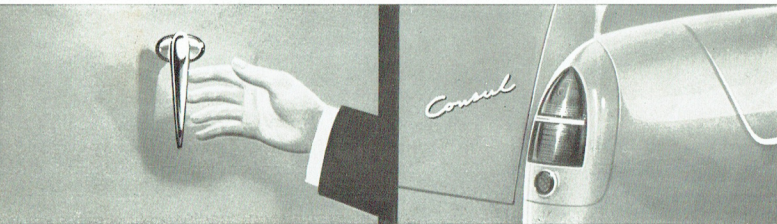

**CENTRAL TAILGATE HANDLE** allows easy, single-handed operation. The tailgate suspension chains are P.V.C. covered for load-protection.

**COMPACT TWIN TAIL-LIGHT ASSEMBLY . . .** incorporates red stop light, amber flashing turn-indicator lights and built-in reflectors.

# Specifications CONSUL COUPE UTILITY

**ENGINE:** Four cylinder cast integrally with upper half of crankcases, bore 2.25 ins; stroke 2.13 ins. Capacity 153.9 cu. ins. Overhead valve, push rod operated from harmonic cams in cylinder block. Compression ratio 7.8:1. B.H.P. 57 at 4,200 R.P.M. Torque 92 lbs./ft. at 2,300 R.P.M. Three bearing crankshaft with integral weights, dynamically balanced. Detachable cast-iron cylinder head incorporating volume controlled combustion chambers for economy and smooth running. Special autothermic alloy pistons. Three point suspension of engine and gear box giving remarkably smooth power flow.

**ENGINE LUBRICATION:** Pressure feed by submerged gear pump to crankshaft main bearings, big-end bearings and camshaft bearings via drillings in cylinder block and crankshaft. Full flow type oil filter fitted direct to cylinder block. Accessible dip stick and oil filter. Sump capacity with oil filter, 7.5 pints.

**IGNITION:** 12 volt battery and coil (battery accessibly located under hood) — distributor has automatic advance and retard and additional vacuum control. Sparking plug size 14 mm. Firing order 1, 2, 4, 3.

**FUEL SYSTEM:** Diaphragm type fuel pump mechanically operated. Down draught carburetor has special choke control and is fitted with combined air cleaner and silencer. Electrical petrol gauge. Petrol tank capacity 11 gallons.

**COOLING SYSTEM:** Belt-driven fan and water pump with thermostatic heat control. Tube and fin type radiator. Capacity of system 18 pints.

**TRANSMISSION:** Clutch — dry single plate spring cushioned. Hydraulic operation from pedal to heavy duty ball-bearing thrust release. Remote control of gears on steering column. Light action synchro-mesh on top and second gears. Heavily cut constant mesh gears. Three forward speeds. Overall ratio 4.44 to 1, 7.29 to 1, and 12.81 to 1. Reverse 17.14 to 1. Oil capacity of gear box 2.5 pints approximately.

**REAR AXLE:** 3/4 floating, hypoid final drive. Heavy duty roller and ball bearings. Open type drive shaft. Universal joints have needle roller bearings. Axle ratio — 4.24 to 1. Oil capacity 2 1/2 pints approximately.

**FRONT SUSPENSION:** Independent front wheel suspension employs low periodicity coil springs mounted on special hydraulic double-acting telescopic shock absorbers integral with the wheel spindle assembly. The upper end of this unit rotates in an anti-friction bearing suspended in rubber and mounted on the body high inside wing valence. The base of the wheel assembly is connected via a ball jointed transverse track control arm to a tubular cross-member bolted to underside of the unitary body. An anti-roll torsion bar is fitted which, being triangulated, holds the track control arms in the fore and aft direction. The wide spacing and high location of the springs and shock absorbers, combined with accurately controlled geometry, give excellent riding and steering.

**REAR SUSPENSION:** Longitudinal semi-elliptic 9-leaf springs rubber insulated. Hydraulic double-acting shock absorbers.

**BRAKES:** Hydraulic Internal — front 9 ins. x 2 1/2 ins. Rear 9 ins. x 1 1/2 ins. Front — two leading shoes, rear — floating expander. Total lining area 147 sq. ins. Foot brake all four wheels, hand brake on rear wheels only.

**STEERING:** Recirculatory ball type. Ratio 18.0 to 1. Steering wheel diameter 17 ins. Two spoke safety type.

**WHEELS AND TYRES:** Pressed steel with wide base rims. Rust-less steel hub-caps. Tyres 6.70 x 13 — 6 ply.

**ELECTRICAL EQUIPMENT:** Two-brush ventilated generator, compensated voltage control. Drive: "V" ball easily adjustable. Starter motor. Horn: high frequency, operated by button on steering column. Battery: 12 volt 57 amp. hr. at 20 hr. rate.

**INSTRUMENTS:** Conveniently grouped cluster immediately in front of driver includes speedometer, fuel gauge, temperature

gauge, oil pressure warning light, direction indicator warning lights, ignition warning light, headlamp main beam warning light. Instrument lighting controlled by rearstar incorporated in main lighting switch.

**CONTROLS:** Choke, combined ignition-starter switch, lighting switch, instrument light and windshield wiper. Plastic control knobs. Foot operated headlamp dimmer switch.

**BODY:** All-steel welded integral construction. Safety glass all round. Curved type fixed windscreen. Hinged windraught ventilators embodied in front doors. Safety design push-button door handles. Adjustable full-width tubular construction bench type seat. Washable vinyl headlining. Spare wheel housed in separate compartment beneath tailgate at rear.

**GENERAL EQUIPMENT:** Dual windscreen wipers operated from vacuum pump fitted on engine. Moisture-proof, flush fitting hooded head-lamps. Separate side lamps. Tall and stop lamps combined. Rear number plate illumination lamp. Interior lights. Sun visors. Doors lockable on both sides. Approved Rasher type direction indicators operated by self-cancelling arm on steering column. Exterior rear view mirror. Built-in fresh air ventilation system. Provisor for fitting air-conditioning system, demisters and radio.

**GENERAL DIMENSIONS:** Overall length: 171 ins. Overall width: 47.5 ins. Overall height: 60.24 ins. Wheelbase: 104.5 ins. Track (front): 53 ins.; (rear): 52 ins. Turning circle: 38 ft. Kerb weight: 2,660 lbs. Maximum G.V.W.: 3,900 lbs.


*Ford Motor Company of Australia Pty. Ltd., whose policy is one of continuous improvement, reserves the right, subject to such regulations as may from time to time apply, to change specifications and prices at any time without notice or incurring liability to purchasers.*

**FORD MOTOR COMPANY OF AUSTRALIA PTY. LTD.**  
(Incorporated in Victoria) Registered Office: Geelong, Victoria

D/MS3 59

ADDED POWER WITH **4-CYLINDER ECONOMY**

LONG, WIDE, DEEP **8-CWT. LOAD-SPACE**

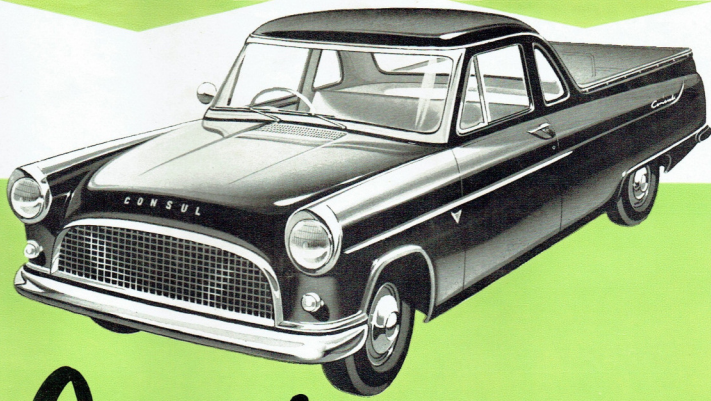


**Consul** COUPE UTILITY



**REAR END PROTECTION.** Rubber-faced bumperettes curve right around the vital rear corners, absorb shocks better and do not show scratches.


**CENTRAL TAILGATE HANDLE** allows easy, single-handed operation. The tailgate suspension chains are P.V.C. covered for load-protection.

**COMPACT TWIN TAIL-LIGHT ASSEMBLY . . .** incorporates red stop light, amber flashing turn-indicator lights and built-in reflectors.

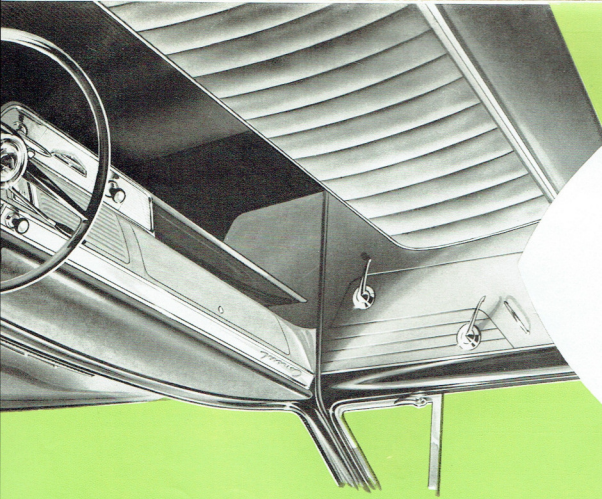

The Consul Coupe Utility is spacious in every practical aspect — in wide, long 8 cwt. payload capacity, and in wide comfort for three people. The hardwood floor is designed for convenient loading height and has steel side strips and the top edges of these panels are formed by heavy-duty steel loading strips. The tailgate, when lowered, forms a loading platform level with the floor, and a smart weatherproof tonneau cover is standard equipment. Inside the coupe there's no squeeze for even three big people — legroom, hiproom and headroom are outstanding. Other features for extra comfort and convenience include the deep cushioned seat with special zig-zag spring construction which keeps its shape permanently, the wrap-around windscreen which provides an unobstructed view of the road ahead almost from the front wheels onwards, two interior sun visors, and the steering wheel or "dished" design to provide added driver-protection in case of impact.

**LOOK AT THE S-P-A-C-E-I!**

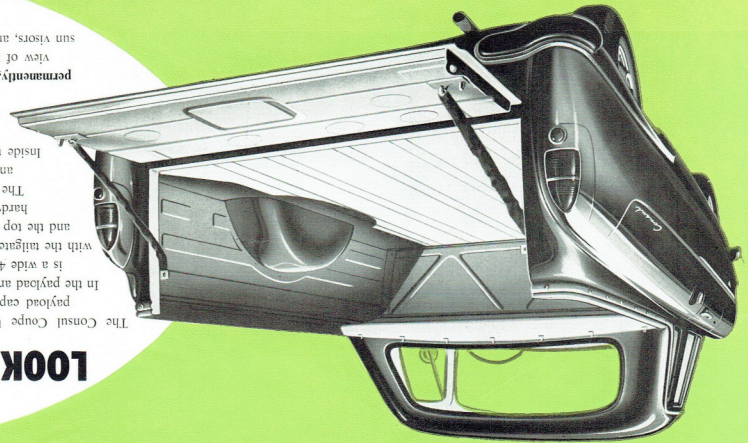

# Special features CONSUL COUPE UTILITY

**ENGINE:** Four cylinder cast in-iron, with sport ball of capacity 4200 cc., compression ratio 28:1, H.P. 57 at 4000 r.p.m., 25 ft. lb. torque at 2600 r.p.m. Timing belt drive with overhead valves, 180° crankshaft, 24 valves. The complete engine bearing and gear box giving remarkably smooth power flow.

**ENGINE LUBRICATION:** Pressure feed by submerged pump to carburetor, main bearings, big-end bearings and connecting rod bearings via diffusers in cylinder block and crank case. Full flow of fresh feed direct to cylinder block. Accessible dip stick and oil filter. Pump capacity with oil filter, 2.5 gallons.

**IGNITION:** 12 volt battery and coil battery assembly located under hood. Distributor and condenser separate from engine and positioned centrally. Timing advance, three points.

**FLUID SYSTEMS:** Lubrication type flat pump mechanically operated. Down draft carburetor has special choke control and 4 speed gear. Petrol tank capacity 17 gallons.

**COOLING SYSTEM:** Belt-driven fan and fan type radiator. Capacity of system 18 gallons.

**REAR END PROTECTION:** Rubber-faced bumper-eyes curve right around the vital rear corners, absorb shocks better and do not show scratches.

**REAR END PROTECTION:** Rubber-faced bumper-eyes curve right around the vital rear corners, absorb shocks better and do not show scratches.



REAR END PROTECTION: Rubber-faced bumper-eyes curve right around the vital rear corners, absorb shocks better and do not show scratches.



CENTRAL TAILGATE HANDLE allows easy, single-handed operation. The intelligent signals, turn-indicator lights and built-in reflectors.

**TRANSMISSIONS:** Clutch—dry single plate spring cushioned. Three ratios. Remote control of gears on steering column. Gear release. Remote control of gears on steering column. Gear release. Remote control of gears on steering column. Gear release. Remote control of gears on steering column.

**ELECTRICAL EQUIPMENT:** Two-bulb ventilated generator. 6-volt motor. Horn high frequency, operated by button on steering column. Battery 12 volt 57 amp. H.P. at 20 ft. m.p.h.


**GENERAL DIMENSIONS:** Overall height 60.2 in. Wheelbase 104.6 in. Track (front) 53 in.; (rear) 52 in. Turning circle 29.8 ft. Kerb weight 2,650 lbs. Maximum G.V.W. 3,300 lbs.

**WHEELS AND TYRES:** Pressed steel with wide base bias-tyres. Front disc brakes. Tyres 20" x 13-8 8-ply.

**STEERING:** Rack-and-pinion ball type. Ratio 18.0 to 1. Steering wheel diameter 17 in. Two spoke safety type.


**EXHAUST SYSTEM:** Catalytic converter for fitting air-conditioned cars. Two valves on both sides. Approved flange type direction indicator operated by anti-dive system. Exhaust system fitted with anti-rattle system. Provision for fitting air-conditioning and systems, coolant and acid.

**GENERAL EQUIPMENT:** Dual headlights, dual wind-up front window pump fitted on engine, multi-stage, flat fitting rear window, dual wind-down rear window, dual interior door handles, automatic window stop, dual interior door handles, automatic window stop, dual interior door handles, automatic window stop.

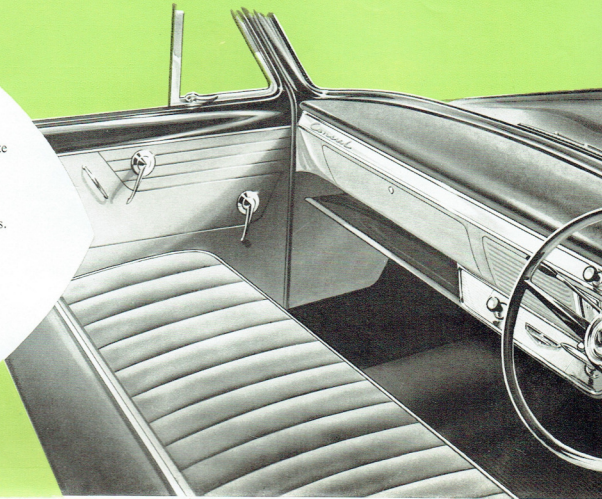


## LOOK AT THE S-P-A-C-E!

The Consul Coupe Utility is spacious in every practical aspect — in wide, long 8 cwt. payload capacity, and in wide comfort for three people. In the payload area, measurement along floor to tailgate is 74", tray width is 57", the tailgate is a wide 48", height of the walls is 18.75" and the overall length of the load area with the tailgate lowered is 96". All-steel double panel walls surround the load area and the top edges of these panels are formed by heavy-duty steel loading strips. The hardwood floor is designed for convenient loading height and has steel skid strips. The tailgate, when lowered, forms a loading platform level with the floor, and a smart weatherproof tonneau cover is standard equipment. Inside the coupe there's no squeeze for even three **big** people — legroom, hiproom and headroom are outstanding. Other features for extra comfort and convenience include the deep cushioned seat with special zig-zag spring construction which keeps its shape permanently, the wrap-around windshield which provides an unobstructed view of the road ahead almost from the front wheels onwards, two interior sun visors, and the steering wheel of "dished" design to provide added driver-protection in ease of impact.

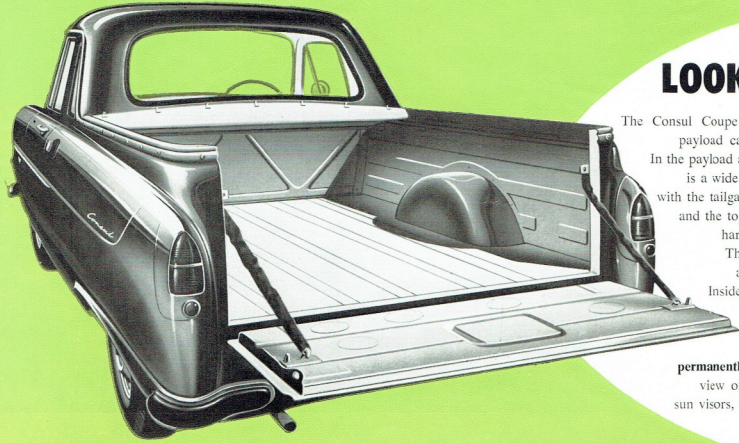

## Consul COUPE UTILITY

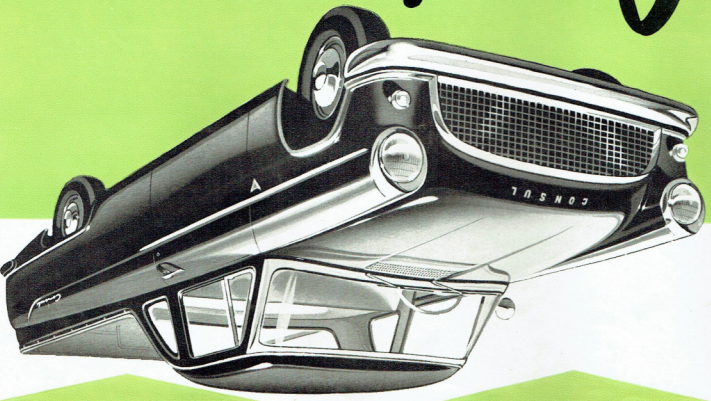

**ADDED POWER** WITH **4-CYLINDER** **DEEP 8-CWT.** **LOAD-SPACE ECONOMY**

**NEW ADDED PERFORMANCE WITH INCREASED  
TORQUE, ADDED B.H.P. —  
PLUS 8 CWT.  
CAPACITY!**


*All the benefits of  
Ford-Australia's greater  
"know-how" in  
coupe utility design!*




Ford-Australia designed the first coupe utility type of vehicle. Since then, the coupe utilities built by Ford have kept on bringing new advances. Here is the latest example of this continual progress — a balance of power, load-rating and overall weight which steps

up efficiency in every purpose to which a coupe utility can be put. Styling and comfort, too, are outstanding. In personal car as well as working use, this Consul coupe utility brings you new and greater advantages.

**Oversquare OHV power with a plus — and outstanding economy!**

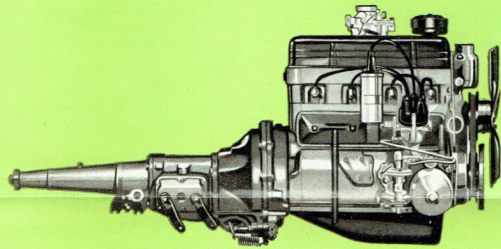

With an R.A.C. rating of 16.9 h.p., this modern engine develops 59 h.p. In coupe utility work the flexibility of its performance is particularly important. Faster power output means sparking acceleration, reserves are there for long climbs and heavy going and, in cruising, it does an effortless job at the relatively low rate of revolutions and short piston stroke provided by its oversquare design. This oversquare design is of great importance — for it contributes to greater smoothness, longer life and a fuel economy that is really outstanding. Power-to-weight ratio is another factor in the Consul engine's favour. In the normal servicing which a coupe utility needs in its busy working life, there is an advantage, too, in the easy accessibility of the components in this Consul engine.

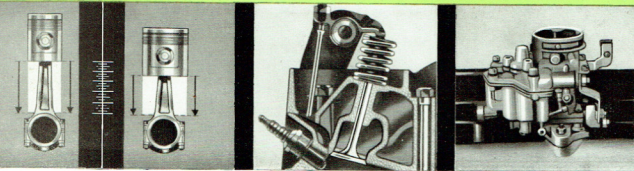


**OVERSQUARE, SHORT-STROKE DESIGN:** The most efficient power in modern engines comes from oversquare design in which the diameter of the cylinders is increased in relation to their depth. This allows a shorter piston stroke which lessens internal friction, saves wear and gets more efficiency from less petrol. On the right, above, is illustrated Consul's "short-stroke" of piston in comparison with that of the conventional engine as shown on the left.

**OVERHEAD VALVES:** These permit a more efficient combustion head shape which spreads the explosion evenly — and gets more power from every fuel charge. In Consul, valve life, too, is greater for the valve guides are an integral part of the cylinder head thus improving heat dissipation.

**DOUBLE VENTURI CARBUR-ETTOR:** An automatic high-power jet means greater fuel economy through provision of the most efficient fuel-air mixtures for all driving conditions. The down-draught design of the carburettor, special intake manifold design and overhead valves also increase efficiency.

**ALL THESE ADVANCES  
IN ENGINE DESIGN:**

Four bearing crankshaft with integral weights. The shaft is exceptionally rigid in design and bearing surfaces are larger because of increase in width between centres of cylinder bores . . . improved cooling of exhaust valves . . . full-flow oil filter . . . 3-point rubber-cushioned engine mounting system . . . special design aluminium alloy pistons . . . direct injection of oil onto the cylinder walls when the engine is started cold for longer engine life.



**Miracle-Ride smoothness  
greater driver control and more stability!**


Consul's suspension is ideally suited to coupe utility usage. It not only provides a superlatively smooth ride but also extra stability and road-hugging which are particularly noticeable in cornering and on uncertain surfaces. This combination of comfort and safety is achieved through the unique front suspension shown at the left . . . long, heavy-duty underslung rear springs . . . lower centre of gravity . . . heavy-duty telescopic shock absorbers . . . wide track . . . and 13" diameter wheels with wide base rims and correspondingly wide road contact of tyres.

**SHORTER TURNING CIRCLE:** Consul is easy to manoeuvre in confined loading areas, in traffic and in any parking situation. The turning circle is only 38' and high-efficiency steering with light but positive action also assists in manoeuvrability. The driver's remarkable vision, front, rear and sides, is another big asset in handling ease.

**EVERY FEATURE INCREASES COUPE UTILITY EFFICIENCY!**


Big 9" diameter brakes with a braking area of 147 sq. ins. . . longer wheelbase of 104½" . . . pendant-type brake and clutch pedals and clutch action is hydraulically assisted . . . key-turn starting . . . 12-volt electrical system . . . safety "dished" design steering wheel . . . built-in and controllable ventilating system with air-intake coming in the centre of the engine hood out of the

way of road fumes and dust . . . extra strength of box-form integral body frame construction and special central reinforcement of underbody frame so that longitudinal channel members extend completely from front to rear as continuous support for the most concentrated load . . . flasher-type direction indicators . . . wide opening doors lockable on both sides of vehicle.

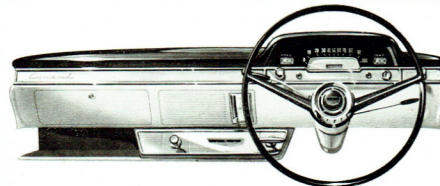

The completely new Consul Facia Panel features a "safety-padded", anti-glare section running the full width across the top, and a new wide-view hooded speedometer, locking glove compartment and parcel shelf. Better placement of every instrument and control ensures a completely uninterrupted view of the instrument panel. Refinements include high quality control knobs with identifying symbols, new slimmed shroud on the steering column and giant size ash-tray.

**Spare tyre compartment:** Conveniently placed under the tailgate, and without obstructing the load space area, is a completely separate and weather-tight locking compartment for the spare tyre. The coverplate is hinged at the left to ensure against loss when spare is taken out.



**Consul — THE COUPE UTILITY FOR POWER, LOAD AND THRIFT!**