









kizashi.ca



Way of Life!

suzuki.ca

40010-GV4X4-ENG



COM

0

For Those Who Want it All

Follow your road – regardless of where it may lead you – with the 2010 Suzuki Grand Vitara. Whether navigating campground trails, or getting yourself or the kids to practice, this authentic SUV is designed to move at your speed of life. Choose between two powerful, yet fuel-efficient engines that offer unparalleled flexibility. Add to this a versatile cargo area, a refined spacious interior, and class leading towing capacity.



2010 GRAND VITARA

- Powerful 4 or 6 cylinder engine options
- An authentic SUV designed to impress
- Highest towing capacity in its class
- 4 mode 4WD offers unrivalled control

Where the Advantage Begins

Sit back and enjoy all the comforts of home, even when you're nowhere near it. With a refined interior that provides driver and passengers alike with a number of functional and convenient amenities, it's actually hard not to.


The available power sunroof enhances cabin spaciousness, while allowing all occupants to better experience and appreciate their surrounding environment.

Usuable space surrounds you. You have several options for your way of life. Up front, the convenient sliding centre armrest opens to reveal space for items such as maps, while a flip open door in front of the gear shift is great for cell phones, wallets or keys, plus each of the front doors have a pocket to hold a water bottle, on top of the dual cup holder located in the centre console. And for items you may want to lock up, you have the generous sized glove box. In the rear, there are door and seatback pockets, 2 centre cup holders and there are also storage pockets in the cargo area and tailgate. For more secure or less visible storage there is a cargo area cover, which doubles as an added shelf.

Reclining rear seats

In the Grand Vitara not only the front passengers have the luxury of reclining their seats.









Go keyless, with our standard SmartPass[™] system. Lock and unlock your Grand Vitara, even start and stop the engine without touching the key.



Highway driving is made easier with standard cruise control functions placed on the spoke of the steering wheel, right where you need them.



The premium in-dash sound system can be controlled via the illuminated audio controls integrated into the steering wheel. Up to seven speakers, plus a subwoofer, create a full range of sound that's levelled by speed sensing volume control.

What's more, the CD player accepts MP3 and WMA audio files, is XM Satellite Radio ready, and includes an AUX port to connect your MP3 players to the speaker system.

TEM AUTO

OFF

Fully automatic climate control maintains the ideal cabin ambience for increased driving comfort. Cloth or leather heated front seats are standard on JLX models.



Powerful yet Efficient.

Under the hood of every Grand Vitara is an innovative engine that gives you the ability to explore the world around you. Brilliantly engineered, it offers the best of both worlds by delivering an abundance of power, and best in its class towing (3000lbs) while achieving impressive fuel economy.



Two engine options suit your need for performance with the Grand Vitara. The 2.4 litre 4 cylinder and the powerful 3.2 litre V6 engine both feature advanced variable valve timing (VVT) technology. The VVT offers increased power and torque and it widens the performance range while reducing fuel consumption, maximizing cost performance.




Built to Perform.

A true SUV, the Grand Vitara never experiences performance anxiety. This is due to the fact it was designed with you – the driver – in mind. Because let's face it, sometimes life has you taking the road less travelled.


4-mode 4x4

The Grand Vitara's 4-mode 4x4 system transmits power to all four wheels at all times, ensuring positive traction regardless of the road surface. A switch built into the centre console lets you quickly and easily change modes between **4H** for most driving conditions, **4H** Lock for serious off-roading, **4L** Lock for extreme surface conditions, and **N** (neutral) mode, specifically intended for motor home owners wishing to take along an SUV on camping trips to use as a runabout. Switching to N-mode frees the transmission for safe and effortless towing of the Grand Vitara without adding kilometres to the odometer.

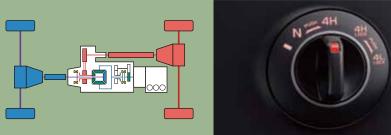








Built atop an Integrated Ladder Frame, the Grand Vitara achieves increased rigidity and durability while minimizing overall vehicle weight. The monocoque design also reduces annoying body squeaks and rattles. Additionally, this framing allows for increased ground clearance and reduced floor height, resulting in outstanding off-road capabilities. It also results in a class-leading* towing capacity of 3000 pounds.

Noise/Vibration/Harshness (NVH) engineers have successfully lowered interior noise levels. This works in creating a more pleasant environment for drivers and passengers alike.






Agility and sporty handling is delivered through the independent suspension featuring front MacPherson struts and rear multi-link geometry. Both work in tandem to increase on-road responsiveness and off-road handling.



Safety and Security.

Experience the freedom of true peace of mind – the kind that comes with protection no matter what the road has in store.



Standard on all models is the Electronic Stability Program®* (ESP®). This advanced technology helps manage three important functions: ABS with EBD, traction control and stability control. Using various sensors, the ESP® is able to determine and hold the intended cornering line and optimize both traction and stability by reducing front and rear wheel-slip.









SRS dual front, seat-mounted and side curtain airbags are standard. Note: The SRS airbags are shown inflated for descriptive purposes.





Head-impact protection is built into all pillars and upper cabin surfaces to help minimize head injuries in the event of an accident.

Available on V6 models, the Hill Descent Control feature allows for smooth and controlled descents by automatically applying the appropriate braking force necessary. Hill Hold Control applies the brakes to protect the vehicle from rolling backwards.





3-point ELR seat belts are designed to keep rear seat occupants safe.



2010 Grand Vitara

	4 CY		V6		
COMFORT	XL	JLX	JLX-L	JLX	JLX-L
ower, rack & pinion steering	S	S	S	S	S
ower windows with driver's express down	S	S	S	S	S
ower door locks	S S	S S	S	S S	S S
-stage remote keyless entry with panic function nartPass™ keyless entry and start system	S	S	S S	S	S
ir conditioning	S	S	S	S	S
utomatic climate control	S	S	S	S	S
icron air filter	S	S	S	S	S
M/FM/CD/MP3/WMA player (6 speakers)	S	N/A	N/A	N/A	N/A
M/FM/CD/MP3/WMA player (7 speakers w/subwoofer)	N/A	S	S	S	S
uxiliary audio input jack	S	S	S	S	S
igital Clock Iuminated steering wheel mounted audio controls	S S	S S	S S	S S	S S
peed sensing volume control	S	S	S	S	S
M satellite radio ready (optional receiver & antenna required)	S	S	S	S	S
ruise control	S	S	S	S	S
ower glass sunroof with tilt and slide feature	N/A	S	S	S	S
ront independant MacPherson Strut and rear independant Multi-link suspension	S	S	S	S	S
ISTRUMENT PANEL					
chometer	S	S	S	S	S
oor ajar warning lamps	S	S	S	S	S
eat belt reminders (driver & front passenger)	S	S	S	S	S
nformation display (outside temperature, fuel consumption & range)	S	S	S	S	S
ight-off / key reminder	S S	S S	S S	S S	S S
/arning indicators (low fuel, icy road) teering lock	S	S	S	S S	S
eather-wrapped steering wheel	S S	S	S	S S	S
ilt steering wheel	S	S	S	S	S
NTERIOR					
entre cabin light with fade-out (3 position)	S	S	S	S	S
ear cabin light (3 position)	S	S	S	S	S
ront map lights	S	S	S	S	S
ear cargo light (2 position)	S	S	S	S	S
ront door courtesy lights	N/A	S	S	S	S
loor mats (front & rear) eat material	S	S	S	S	S
Fabric	S	S	N/A	S	N/A
Leather	N/A	N/A	S	N/A	S
eated front seats	N/A	S	S	S	S
un visors with extensions and vanity mirrors	S	S	S	S	S
up holders (2 front / 2 rear)	S	S	S	S	S
ottle holders (2 in front doors)	S	S	S	S	S
ay / night rear view mirror	S	S	S	S	S
eclining seats (front & rear)	S	S	S	S	S
eight-adjustable driver's seat	S	S S	S	S S	S
plit-folding rear seatbacks (60/40) ront/rear head restraints (2/3)	S S	S	S S	S	S S
liding front seat centre armrest with storage compartment	S	S	S	s	S
ront & rear door armrests	S	S	S	S	S
assist grips (2 front / 2 rear)	S	S	S	S	S
ront & rear door pockets	S	S	S	S	S
ront seatback pockets	S	S	S	S	S
torage pockets (cargo area & tailgate)	S	S	S	S	S
verhead console	S	N/A	N/A	N/A	N/A
ccessory power outlets (console x 2, cargo area x 1)	S	S S	S S	S S	S
argo area cover argo area convenience hooks (4)	S S	S	S	S	S S
oat hooks (2)	S	S	S	S S	S
river's footrest	S	S	S	S	S
XTERIOR					
alogen headlights (multi-reflector and projector)	S	S	S	S	S
itomatic headlights (on/off)	S	S	S	S	S
ivacy glass	S	S	S	S	S
ower mirrors (heated)	S	S	S	S	S
ariable intermittent wipers	S	S	S	S	S
ear window wiper/washer with fixed intermittent	S	S S	S S	S	S
ear window defroster with timer emote fuel door release	S S	S	S	S S	S S
emote fuel door release ody-coloured bumpers/mirrors/door handles	S	S	S	S S	S S
og lamps	N/A	S	S	S	S
Dof rails	S	S	S	S	S
ard full spare tire case with "Suzuki" logo	S	S	S	S	S
luminum alloy wheels	S (17 inch)	S (17 inch)	S (17 inch)	S (18 inch)	S (18 inch
res	P225/65R17	P225/65R17	P225/65R17	P225/60R18	P225/60R1





signer Mock kenter S						4 C	YLINDER	V6		
Adde S	SAFETY AND SECUR	ΙΤΥ					JLX	LEATHER	JLX	LEATHER
Nake from tankagis S	Engine block heater									-
S S		OCK, 4L LOCK, Ne	eutral)							
Bidle S <td></td> <td>a airbaga</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>		a airbaga								
MS with BD (Electronic Briek-Group Distribution) S		e airdags								
Series S </td <td></td> <td>a Praka Faraa F</td> <td>Victribution</td> <td>1</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>		a Praka Faraa F	Victribution	1						
state S <td></td> <td></td> <td>nstribution,</td> <td>)</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>			nstribution,)						
Sind and vertilited disc brakes S <		ear stop lamp								
Same (International Stability Program) with fraction control S		d dice brakes								
spine immobilizer S										
S S										-
Sight a distribution S										
SG-FIX child-proof set door locks S										
bildseat latter anchanging (2) read payme running (gbts saydme running										
Bindle-poor foer door locks S<			cury							
system cunning lights deringent based fill hold and Hill descent control S										
Side impact beams S						-				
NA NA<										-
VERIENCE DIMENSIONS VERIENCE DIMENSIONS Verail width mm (inch) 4.550 (77.1) Derail width mm (inch) 1.800 (77.1) Curb weight (min,) X.1 (571 (3582)		nt control								
VERIENCE DIMENSIONS VERIENCE DIMENSIONS Verail width mm (inch) 4.550 (77.1) Derail width mm (inch) 1.800 (77.1) Curb weight (min,) X.1 (571 (3582)	*ESP is a registered trac	demark of Daim	ler AG					S:	Standard N/A	: Not Available
Derail with mm (inch) 4.500 (17.1) (17.1) mm (inch)	-					WEIGHTS				
Decard width mm (inch) 1,410 (71.3) Wheelbase mm (inch) 1,406 (66.7) Wheelbase mm (inch) 1,560 (61.4) Signal diegtance mm (inch) 1,560 (61.4) Signal diegtance mm (inch) 1,560 (61.4) Signal diegtance mm (inch) 55 (18.0) Signal diegtance mm (inch) 55 (18.0) Signal diegtance mm (inch) 55 (18.0) Signal diegtance mm (inch) 57 (18.2) NTERIOR DIMENSIONS Front mm (inch) 1,016 (400) Front mm (inch) 971 (82.2) Rear mm (inch) 971 (82.2) Signal diegtance mm (inch) 971 (82.2) Signal diegtance mm (inch) 971 (82.2) Signal diegtance mm (inch) 1,326 (54.0) Signal diegtance mm (inch) 1,326 (58.0) <			1 500 /	177 1)					JAI	
Dynamic length mm (inch) 1,495 (6.7.) Tread Front mm (inch) 1,540 (60.5) Rear mm (inch) 1,540 (60.5) indimum turing radius m(1) 5.5 (18.0) iscating capacity persons 5 TTEELOD DIMENSIONS Tuel tank capacity (lites) 66 iscating capacity persons 5 Total cancer mm (inch) 1,015 (40.0) Front mm (inch) 971 (38.2) isca Room Front mm (inch) 971 (38.2) isca Room Front mm (inch) 1,035 (40.0) isca Room Front mm (inch) 1,035 (40.0) isca Room Front mm (inch) 1,045 (37.2) stage leight mm (inch) 1,045 (37.2) 1000 (33.0) cargo Ueight Behind 2nd Seat mm (inch) 1,037 (40.8) usige copacity ittres (cubic feet) 3,010 (10.4) 100 (10.4) (39.0) usige copacity ittres (tr) 3,010 (10.4) 100 (10.1) usige copacity ittres (tr) 3,010 (10.0) 100 (10.1)		(-)							-	
Wheelbase mm (inch) 2,560 (10.3.9) Rear mm (inch) 1,550 (61.4) Schund Learnor mm (inch) 2,007 (4,865) Minimu turning radus m(1) 5,5 (18.0) Seating capacity persons 5 MTERIOR DIMENSIONS Front mm (inch) 1,015 (400) Head Room Front mm (inch) 977 (182) Rear mm (inch) 1,015 (400) L100 km (mgg) (2573) (23/3) Head Room Front mm (inch) 977 (182) 66 Fuel consumption (10, 10,143 (139) Seater mm (inch) 1,021 (400) L100 km (mgg) (2573) Shoulder Room Front mm (inch) 1,324 (54.9) Towing capacity Kg (bs) 1,350 (3,00 Rear mm (inch) 1,620 (633) Kg (bs) 1,350 (3,00 EXTERIOR/INTERIOR COLOURS Cargo Height Kear mm (inch) 1,021 (403) Kg (bs) 1,350 (3,00 Largo Leagh Behind 2nd Seat mm (inch) 1,021 (70) Kg (bs) 1,350 (3,00 Largo Volum						Kg (IDS)				
fread Front mm (inch) 1.540 (50.6) Rear mm (inch) 1.560 (51.4) Scaud clearance mm (inch) 200 (7.9) Minimum tuming radius m(1 5.5 NTERIOR DIMENSIONS Head Room Front mm (inch) 977 (38.2) Rear mm (inch) 1.015 (400) 66 66 Fuel tank capacity (itrus) 66 66 Fuel consum (inch) 977 (38.2) 7970 (38.2) Scaud Rear mm (inch) 1.055 (41.3) 66 66 Fuel consum (inch) 1.056 (40.0) 1.016 (40.0) 1.016 (40.0) 1.017 (40.0) Scaud Rear mm (inch) 1.026 (55.5) 1.119 (44.0) 6 1.037 (40.8) Scage Width mm (inch) 1.037 (40.8) 1.014 (39.9) 1.360 (3.00 Scarge Height mm (inch) 1.037 (40.8) 1.014 (39.9) 1.016 (39.0) Scarge Height mm (inch) 1.037 (40.8) 1.014 (39.9) 1.016 (39.0) Scarge Height mm (inch) 1.037 (40.8) 1.014 (39.9) 1.016 (39.0) Lara						Croop uchiele weist			95 (3,957)	
Rear mm (inch) 1560 (61.4) Sound clearance mm (inch) 200 (7.9) Minimum turning radius m(ft) 5.5 (18.0) Seating capacity persons 5 THEIOR DIMENSIONS Tooth mm (inch) 1.016 (400) Rear mm (inch) 1.016 (400) 970 (82.2) Regr mm (inch) 1.036 (43.2) 66 66 Float expression and back monor front mm (inch) 1.036 (43.2) Regr mm (inch) 1.394 (56.9) 1.006 ($1.44.00$) regr (mm (inch) 1.394 (56.9) 1.000 (3.000 Broulder Room Front m (inch) 1.139 (46.00) 700 (27.9) 2.007 (10.400 regge Lagip Leight 2nd Seat Folded mm (inch) 1.021 (40.00) 700 (27.9) 2.007 (27.930 2.207 ($4.66.90$ regge Lagip Leight 2nd Seat Folded m (inch) 1.021 (40.00 700 (27.93) 2.000 2.000 (23.00 regge Lagip Leight 2nd Seat Folded m (inch) <th< td=""><td></td><td>(-)</td><td></td><td></td><td></td><td></td><td></td><td></td><td>-</td><td></td></th<>		(-)							-	
Directed elerance mm (inch) 200 (7.9) Williamu turing adding and the persons 5 NTERIOR DIMENSIONS Head Room Front 1.015 (40.0) Read Front 1.015 (40.0) Labor Port 1.015 (40.0) Labor Front 1.015 (40.0) Labor Front 1.015 (40.0) Rear mm (inch) 1.015 (40.0) Shoulder Room Front mm (inch) 1.036 (41.3) shoulder Room Front mm (inch) 1.346 (55.0) Largo Length Belind 2nd Seat mm (inch) 1.346 (53.2) zargo Langth Belind 2nd Seat mm (inch) 1.037 (40.3) Largo Volume Index Belind 2nd Seat mm (inch) 1.014 (39.9) Largo Volume Index Belind 2nd Seat mm (inch) 1.013 (40.3) Winber of Volume Weat Folded mm (inch) 1.014 (39.9) Largo Volume Index Belind 2nd Seat mm (inch) 1.013 (40.6) Zard Seat Folded m' (ft') 2.01 (70.8)		,				kg (ids)				
Minimum turning radius m (ft) 5.5 (18.0) Seating capacity persons 5 NTERIOR DIMENSIONS 1,016 (40.0) Front mm (inch) 971 (38.2) Rear mm (inch) 971 (38.2) Rear mm (inch) 970 (38.2) Neuron Front mm (inch) 945 (37.2) Neuron Front mm (inch) 1,236 (45.9) Shoulder Room Front mm (inch) 1,234 (54.9) India Rear mm (inch) 1,234 (54.9) Jack Behind 2nd Seat Folded mm (inch) 1,027 (25.8) Zargo Ueight Behind 2nd Seat mm (inch) 1,024 (23.8) Zargo With mm (inch) 1,024 (23.8) netrior Volume Msisurroof m" (th) 0,31 (28.4) wisurroof m" (th) 0,31 (28.4) Pearl Black Charcoal Grey Wither of cylinders 4 6 Cloth: Black Cloth: Black Kumber of cylinders 4 6 Cloth: Black Cloth: Black Cloth: Black Kumber of cylinders 16 2,40 32 (3 2.9)		. ,					JLX-L 2,137	(4,709) 2,2	207 (4,865)	
Beating capacity persons 5 INTERIOR DIMENSIONS Interior pront mm (inch) 1.016 (4c0) Had Room Front mm (inch) 9.01 (3.8.2) Pad Room Front mm (inch) 9.01 (3.8.2) Age are mm (inch) 1.050 (4.13) 1.00 km (mgg) (23/33) Shoulder Room Front mm (inch) 1.432 (56.4) ip Room Rear mm (inch) 1.028 (6.33) cargo Height mm (inch) 1.033 (40.30) arago Wolth mm (inch) 1.033 (40.30) ungage Capcity litres (ftr') 0.081 (11.11) ungage Capcity litres (ftr') 0.081 (11.11) unmber of valves 16 24 Viston displacemet C 2.393 3.3195 mm (inch) 1.21 0.10 (1.1) 10 (1.1) 0.10 (1.1)<		. ,						/ AT	EAT	
Interior Diversion Front mm (inch) 1.016 (400) Fuel economy City/Highwy 11.2/8.6 Colspan="2">Colspan="										
Interest Diskers Disk L'100 km (mpg) (25/33) (23/3) Colspan="2">Colspan="2"Colspan="2">Colspan="2"Colsp	seating capacity	persons	5)		Fuel tank capacity (litres)			
Head Room Front mm (inch) 1.016 (4.0.0) Front mm (inch) 971 (38.2) Towing capacity Kg (bs) 1,360 (3.00 Rear mm (inch) 1.050 (4.13) Mg (bs) 1,360 (3.00 Shoulder Room Front mm (inch) 1.438 (46.4) Towing capacity kg (bs) 1,360 (3.00 Shoulder Room Front mm (inch) 1.438 (46.4) Towing capacity kg (bs) 1,360 (3.00 And Rear mm (inch) 1.438 (46.4) Towing capacity kg (bs) 1,360 (3.00 Stor Gap Leight Rear mm (inch) 1.494 (42.5) Stor Gap (40.8) Towing capacity kg (bs) 1,360 (3.00 Cargo Height mm (inch) 1.037 (40.8) mm (inch) 1.041 (42.5) Stor Gap (40.2) Stor Gap (NC								
FrontFront971 (38.2).eg RoomFrontmm (inch)970 (38.2)Rearmm (inch)1,050 (41.3)shoulder RoomFrontmm (inch)1,452 (56.4)Rearmm (inch)1,434 (54.9)ig RoomFrontmm (inch)1,19 (44.0)Rearmm (inch)1,19 (44.0)Zargo LengthBehind 2nd Seatmm (inch)1,119 (44.0)Zargo LengthBehind 2nd Seatmm (inch)1,119 (44.0)Zargo LengthBehind 2nd Seatmm (inch)1,037 (40.8)Zargo Volume IndexBehind 2nd Seatm² (t?)201 (70.8)Wistonroofm² (t?)201 (70.8)Wumber of vylinders46Vumber of vylinders46Vumber of vylinders16 : 24Wumber of vylinders16 : 21 : 30.500Wumber of vylinders16 : 00Wumber of vylinders4Maximum output1428 (56.2)Yati di Giblacementcc2nd 1433 2.043Zind1433 2.043Sith Mit Point InjectionMatili Point InjectionReverse2.703 3.224Sith Mit A1717Reverse2.703 3.224Sith Mit A1717Reverse2.713 3.253<			mm (inch)	1.016 (40.0)	L/10	00 km (mpg) (25/33)	(23/33)	
Rear mm (inch) 970 (38.2) Journe LegRoom Front mm (inch) 1,050 (13.0) Rear mm (inch) 945 (37.2) Iving capacity kg (lbs) 1,360 (3.00 Shoulder Room Front mm (inch) 1,432 (56.4) Iving capacity kg (lbs) 1,360 (3.00 Behind 2nd Seat mm (inch) 1,449 (55.5) Iving capacity Kg (lbs) 1,360 (3.00 Cargo Length Behind 2nd Seat mm (inch) 1,419 (44.0) Iving capacity				,						
Leg Boom Front mm (inch) 1,050 (t.1.3) Shoulder Room Front mm (inch) 945 (37.2) Shoulder Room Front mm (inch) 1,432 (56.4) ij Room Front mm (inch) 1,432 (56.4) ij Room Front mm (inch) 1,432 (56.4) Zargo Length Behind 2nd Seat mm (inch) 1,520 (53.8) Zargo Width mm (inch) 1,037 (40.8) Zargo Volume Index Behind 2nd Seat mm (inch) 1,011 (39.9) Juggage Capacity Iitres (tub) c feet) 354 (12.5) Zargo Volume Index Wisunoof m ⁽ (ft ⁺)) 2.01 (70.8) w/surnoof m ⁽ (ft ⁺)) 2.01 (70.8) Musti Point (10.86) Wumber of valves 16 24 Viston displacement cc 2.33 (3.195 Sore x stroke mm (inch) 2.10 (3.00 Wumber of valves 16 24 Wasimum output p ⁻¹ pm 162 (6.00 2.11 10 : 1 10 : 1 Wasimum output p ⁻¹ pm			•	,		TOWING CAPACI	ГҮ			
Rear mm (inch) 1/300 (37.2) shoulder Room Front mm (inch) 1,432 (56.4) Hip Room Front mm (inch) 1,432 (56.4) Jag Rear mm (inch) 1,432 (56.4) External (1000) Cargo Length Behind 2nd Seat mm (inch) 1,409 (55.5) Cargo Height mm (inch) 1,620 (63.8) External (1000) External (1000) Cargo Volume Index Behind 2nd Seat mm (inch) 1,014 (39.9) External (1000) External (1000) Unggage Capacity Ittres (1tr) 0.81 (28.4) External (1000) External (1000) External (1000) Under of cylinders 4 6 Cloth: Black Cloth: Black Cloth: Black Wumber of cylinders 4 6 Cloth: Black Leather: Black Metallic Waximum orque Ib-ft @rpm 165 @ 6,000 230 @ 6,200 La @ 3,300 La @ 3,500 Maximum orque Ib-ft @rpm 162 @ 4000 213 @ 3,500 Earl Blue Silky Silver Pearl White etail distributin	Log Poom					Towing capacity		kg (lbs)		1,360 (3,000
Shoulder Room Front mm (inch) 1,432 (56.4) iip Room Front mm (inch) 1,394 (56.9) zing Length Behind 2nd Seat mm (inch) 1,119 (4.0) Zargo Length Behind 2nd Seat mm (inch) 1,119 (4.0) Zargo Length Behind 2nd Seat mm (inch) 1,119 (4.0) Zargo Height mm (inch) 1,021 (03.8) Cargo Width mm (inch) 1,014 (39.9) Jugg Ze Capacity Behind 2nd Seat m ³ (tr) 2.015 (26.6) Zardo Seat Folded m ³ (tr) 2.017 (28.8) Wisunroof m ³ (tr) Zardo Volume Mex Seat Folded m ³ (tr) 2.010 (10.8) Wisunroof M ⁴ (tr) Winber of Valves 16 24 3.010 (10.80) Wisunroof 10.1 10.1 Yold indivers 10.1 10.1 10.1 10.1 10.1 Yold indivers 4 6 Cloth: Black Cloth: Black Leather: Black Wimber of Valves 16 24 3.500 Multi Point			•	,						
Rear mm (inch) 1.394 (54.9) Jip Room Front mm (inch) 1.409 (55.5) Rear mm (inch) 1.119 (44.0) Cargo Length Behind Znd Seat mm (inch) 1.037 (40.8) Cargo Width mm (inch) 1.037 (40.8) Cargo Width mm (inch) 1.037 (40.8) Uggage Capacity Iitres (cubic feet) 354 (12.5) Cargo Volume Index Behind Znd Seat m" (1*) 0.81 (28.4) Wisknroof m ³ (1*) 0.21 (70.8) Wisknroof iitres (1*) 3,080 (111.1) Wunder of Qilinders 4 6 Number of Qilinders 4 6 Stort of valves 16 24 Stort of valves 16 24 Stort of valves 16 24 Stort of valves 162 (9 4000 213 (9 3,500 Used istribution Multi Point Injection Multi Point Injection Rear aratio 1st 2.826 3.520 2nd 1.493 2.043 3.040	Shoulder Room		•	,						
Hip Room Front mm (inch) 1.409 (55.5) Rear mm (inch) 1.119 (44.0) Cargo Length Behind 2nd Seat mm (inch) 1.020 (63.8) Cargo Width mm (inch) 1.037 (40.8) Cargo Volume Index Behind 2nd Seat Folded mm (inch) 1.014 (39.9) Uggage Capacity littres (cubic feet) 354 (12.5) Ittres (cubic feet) 354 (12.5) Cargo Volume Index Behind 2nd Seat Folded m ¹ (ft ¹) 0.75 (26.6) Ittres (rubic feet) 3.080 (111.1) Number of volumes littres (ft ¹) 3.080 (111.1) Notanic feet Notanic feet Wumber of valves 16 24 Notanic feet Netallic Cloth: Black Cloth: Black Valiantin output Maximum Core 2nd 1.493 2.043 Stond 1.401 Cloth: Black Cloth: Black Cloth: Black Cloth: Black Cloth: Black Cloth: Black Leather: Black Metallic Maximum output Maximum outp										
Rear mm (inch) 1,119 (44,0) Cargo Length Behind 2nd Seat mm (inch) 709 (27,9) Cargo Height Inch 1,037 (40.8) mm (inch) 1,014 (39.9) Cargo Width mm (inch) 1,014 (39.9) Itres (cubic feet) 354 (12.5) Cargo Volume Index Behind 2nd Seat m ¹ (ft ²) 0.81 (28.4) Itres (cubic feet) 354 (12.5) Cargo Volume Index Behind 2nd Seat m ¹ (ft ²) 0.81 (28.4) Itres (ft ²) 3,080 (111.1) Unger of cylinders 4 6 Valume of valves 16 24 Vistor displacement cc 2,393 3,195 Sore x stroke Cloth: Black Cloth: Black Leather: Black Waiximum output b-ft @ rpm 166 @ 6,000 230 @ 6,200 230 @ 6,200 230 @ 6,200 230 @ 6,200 230 @ 6,200 230 @ 6,200 230 @ 6,200 230 @ 6,200 213 @ 3,500 Itres (Itre Pint Injection Multi Point Injection Metallic Cloth: Black<	Hin Room									
Cargo Length Behind 2nd Seat mm (inch) 709 (2 r.9) (2 r.9) Cargo Heigh 2nd Seat Folded mm (inch) 1,620 (63.8) Cargo Width mm (inch) 1,014 (39.9) Largo Width mm (inch) 1,014 (39.9) Largo Volume Index Behind 2nd Seat m ³ (ft ²) 0.81 (28.4) Largo Volume Index Behind 2nd Seat m ³ (ft ²) 0.81 (28.4) Volume Index Behind 2nd Seat m ³ (ft ²) 0.81 (28.4) Volume Index Behind 2nd Seat m ³ (ft ²) 0.81 (28.4) Volume Index Behind 2nd Seat m ³ (ft ²) 0.01 (10.8) Interior Volume Mysunoof m ³ (ft ²) 3.080 (111.1) Wumber of cylinders 4 6 Wumber of valves 16 24 Viston displacement cc 2.33 (3.50) Sore x strok mm (inch) 2.89 (6.50 (5.5 x.3.37) Maximum output hp @ rpm 166 @ 6.000 230 @ 6.200 Yadi displacement cc 2.43 (3.5.20 Card 1.4			•	,						
2nd Seat Foldedmm (inch)1.620 (63.8)Cargo Widthmm (inch)1.037 (40.8)uggage Capacitylitres (cubic feet)354 (12.5)Cargo Wolume IndexBehind 2nd Seat m^3 (ft*)0.81 (28.4)w/sunroof m^3 (ft*)0.81 (28.4)w/sunroof m^3 (ft*)2.01 (70.8)2nd Seat Folded m^3 (ft*)2.01 (70.8)w/sunroof m^3 (ft*)3,080 (111.1)w/sunroofiitres (ft*)3,080 (111.1)w/sunroofiitres (ft*)3,010 (108.6)ENGINEc2,393Number of cylinders46Auximum otrupu10:110:1Naximum otrupuhp @ rpm166 @ 6,000Yakimum otrupuhp @ rpm166 @ 2,000213 @ 3,500Maximum otrupuhb ft @ rpm162 @ 4000213 @ 3,500Multi Point InjectionMulti Point InjectionReverse2,7033,224Sear ratio1.51 2.8262nd1.493 </td <td>Cargo Length</td> <td></td> <td></td> <td></td> <td></td> <td>EXTERIOR/INTERI</td> <td></td> <td></td> <td></td> <td></td>	Cargo Length					EXTERIOR/INTERI				
Cargo Widthmm (inch)1,037 (40.8)Cargo Widthmm (inch)1,014 (39.9)Laggade Capacitylitres (cubic feet)354 (12.5)Largo Volume IndexBehind Znd Seatm² (ft²)0.81 (28.4)Vumoofm² (ft²)0.75 (26.6)Lardo Seat Foldedm² (ft²)2.01 (70.8)w/sunroofm² (ft²)3.080 (111.1)w/sunrooflitres (ft²)3.010 (108.6)ENGINEt6Vumber of cylinders46Vumber of cylinders1624Vatinum output10 : 110 : 110 : 110 : 110 : 1Asirum output10 : 110 : 1Ho ft with Point Injection230 @ 6,200Vatinum output10 : 12.043Created Stribution1.4932.043Created Stribution1.4932.043Lardo 1 1492.043Lardo 1 1492.043Lardo 2 14th0.688Lardo 1 1492.043Lardo 1 1492.043Lardo 1 1491.000SthN/AAtth0.512SthN/AHigh 1 0.0001.000SthN/ALardo 1 149Lardo 1 1490Lardo 1 1491Lardo 1 14	00180 201801			,			OK COLOOKS			
Cargo Widthmm (inch)1,014 (39.9)uggage Capacitylitres (cubic feet)354 (12.5)Cargo Volume IndexBehind 2nd Seatm² (ft²)0.75 (26.6)2nd Seat Foldedm² (ft²)2.01 (70.8)w/sunroofm² (ft²)3,080 (111.1)w/sunroofm² (ft²)3,080 (111.1)w/sunroofm² (ft²)3,080 (111.1)w/sunrooflitres (ft²)3,080 (111.1)w/sunroofm² (ft²)3,010 (108.6)ENGINE46Vumber of cylinders46Vumber of valves1624System ofspace10 : 110 : 1Vaximum outputhp @ rpm166 @ 6,00Awimum outputhp @ rpm166 @ 6,00Maximum outputhp @ rpm166 @ 6,00Maximum outputhp @ rpm16 2 ad 4000213 @ 3,500Multi Point InjectionMulti Point InjectionRear ratio1st2.8263 rd1.0001.4932.043Chart Size3.520SthN/AAth0.6881.0001.4014.th0.6885.1253.583Cioth: BlackLeather: BlackLeath	Cargo Height	2110 0000 1010								
Luggage Capacitylitres (cubic feet) $354 (12.5)$ Cargo Volume IndexBehind 2nd Seat $m^3 (tr)$ $0.81 (28.4)$ Wysurroof $m^3 (tr)$ $0.75 (26.6)$ 2nd Seat Folded $m^3 (tr)$ $2.01 (70.8)$ w/surroofm ³ (tr) $1.88 (66.3)$ under of cylinders 4 6 Number of cylinders 4 6 Vumber of valves 16 24 Piston displacementcc $2,393$ $2,993$ $3,195$ Bore x strokemm (inch) $92 \times 90 (3.62 \times 3.54)$ $89 \times 85.6 (3.55 \times 3.37)$ $10 : 1$ 200 $230 \oplus 6,200$ Waximum outputhp \oplus rpm $166 \oplus 6,000$ $10 : 1$ $10 : 1$ $10 : 1$ $10 : 1$ $10 : 1$ $10 : 1$ $2nd$ 1493 $2,043$ $3,500$ Maximum torque $1b + \oplus$ rpm $166 \oplus 4,000$ $213 \oplus 3,500$ Maximum torque 1493 $2,043$ $3,500$ FRANSMISSION $4AT$ $5AT$ $3ear ratio$ $1st$ 2.826 3.520 $2nd$ 1.493 $2,043$ $4th$ 0.688 10000 $2nd$ 1.493 $2,043$ $3rd$ 1.000 $4th$ 0.688 10000 $2nd$ 1.493 $2,043$ $3rd$ 1.000 $3rd$ 1.000 $4th$ 0.688 3.520 $3rd$ 1.000							100			and the second second
Cargo Volume Index w/sunroofBehind 2nd Seat m³ (ft²) $0.81 (28.4)$ $0.75 (26.6)$ $2.01 (70.8)$ w/sunroof $0.81 (28.4)$ $0.75 (26.6)$ $2.01 (70.8)$ w/sunroof $0.81 (28.4)$ $0.75 (26.6)$ $2.01 (70.8)$ w/sunroof $0.81 (28.4)$ $0.75 (26.6)$ $2.01 (70.8)$ $3.080 (111.1)$ w/sunroof $0.81 (28.4)$ $0.75 (26.6)$ $2.01 (70.8)$ $3.080 (111.1)$ w/sunroof $0.81 (28.4)$ $0.75 (26.6)$ $2.01 (70.8)$ $3.080 (111.1)$ w/sunroof $0.81 (28.4)$ $0.75 (26.6)$ $3.080 (111.1)$ w/sunroof $0.81 (28.4)$ $0.75 (26.6)$ $3.080 (111.1)$ w/sunroof $0.81 (28.4)$ $0.75 (26.6)$ $3.000 (110.6)$ $VolecanicRedPearl BlackMetallicCharcoal GreyMetallicENGINE-464-6242150 displacementcc2.2 , 90 (3.62 \times 3.54)9.2 \times 90 (3.62 \times 3.54)3.1959.8 \times 85.6 (3.5 \times 3.37)10 : 1Volecanic10 : 110 : 1Volecanic10 : 110 : 1France Metallic10 : 1AT$	0						1 11			
$ \begin{array}{c c c c c c c c c c c c c c c c c c c $		Behind 2nd S				and the second		-10-	C Contraction	6 1
$\begin{array}{ c c c c c c c c c c c c c c c c c c c$	- Ge relation index					··· \ /@		A D	1-1	12
w/sunroofm³ (tr³)1.88 (66.3)interior Volumelitres (tr³)3,080 (111.1)w/sunrooflitres (tr³)3,080 (111.1)w/sunrooflitres (tr³)3,010 (108.6)ENGINE46Number of valves1624Siton displacementcc2,3933,195Bore x strokemm (inch)92 x 90 (3.62 x 3.54)89 x 85.6 (3.5 x 3.37)Compression ratio10 : 110 : 110 : 1Waximum outputhp @ rpm166 @ 6,000213 @ 0,500Multi Point InjectionMulti Point InjectionMulti Point InjectionFRANSMISSION4AT5ATGear ratio1st2.8263.520SthN/A0.717Reverse2.7033.224Tinal gear ratio512 S3.583Transfer gear ratioHigh1.000						19		19		19
Interior Volumelitres (ft²)3,080 (111.1)w/sunrooflitres (ft²)3,010 (108.6)ENGINECharcoal GreyNumber of cylinders46Vumber of cylinders46Vumber of valves1624Piston displacementcc2,3933,195Bore x strokemm (inch)92 x 90 (3.62 x 3.54)89 x 85.6 (3.5 x 3.37)Compression ratio10 : 110 : 110 : 1Maximum outputhp @ rpm166 @ 6,000230 @ 6,200Maximum torquelb-ft @ rpm162 @ 4000213 @ 3,500Euel distributionMulti Point InjectionMulti Point InjectionTRANSMISSION4AT5ATGear ratio1st2.826Ard1.000SthN/A0.717Reverse2.703Gransfer gear ratio5.125Transfer gear ratio5.125High1.000										
w/sunrooflitres (ft)3,010 (108.6)ENGINEVumber of cylinders46Vumber of cylinders1624Ston displacementcc2,3933,195Bore x strokemm (inch)92 x 90 (3.62 x 3.54)89 x 85.6 (3.5 x 3.37)Compression ratio10 : 110 : 1Maximum outputhp @ rpm166 @ 6,000230 @ 6,200Maximum torque10 : 110 : 110 : 1Vumber of values16 @ 4000213 @ 3,500Multi Point InjectionMulti Point InjectionMulti Point InjectionMulti Point InjectionIRANSMISSION4AT5ATGear ratio1st2.8263rd1.0001.4014th0.6881.0005thN/A0.717Reverse2.703Atth5.1253.583Fransfer gear ratioHigh1.00010001.000	nterior Volume					Volcanic	Pearl B	Black	Charcoal G	irey
Cloth: BlackNumber of cylinders46Number of valves1624Diston displacementcc2,3933,195Sore x strokemm (inch)92 x 90 (3.62 x 3.54)89 x 85.6 (3.5 x 3.37)Compression ratio10 : 110 : 110 : 1Maximum outputhp @ rpm166 @ 6,000230 @ 6,200Maximum torquelb-ft @ rpm162 @ 4000213 @ 3,500Multi Point InjectionMulti Point InjectionMulti Point InjectionTRANSMISSION4AT5ATSear ratio1st2.8263.5202nd1.4932.043Gar ratio1st2.8263.520SthN/A0.717Reverse2.7033.224Tinal gear ratio5.1253.583Gransfer gear ratioHigh1.000Transfer gear ratioHigh1.000		w/sunroof				Red	Metalli	ic	Metallic	
Number of cylinders 4 6 Number of valves 16 24 Diston displacement cc 2,393 3,195 Sore x stroke mm (inch) 92 x 90 (3.62 x 3.54) 89 x 85.6 (3.5 x 3.37) Compression ratio 10 : 1 10 : 1 Maximum output hp @ rpm 166 @ 6,000 230 @ 6,200 Maximum torque lb-ft @ rpm 162 @ 4000 213 @ 3,500 Multi Point Injection Multi Point Injection Multi Point Injection Fuel distribution 4AT 5AT Gear ratio 1st 2.826 3.520 2nd 1.493 2.043 Muth 0.688 1.000 4th 0.688 1.000 5th N/A 0.717 Reverse 2.703 3.224 Final gear ratio 5.125 3.583 Gransfer gear ratio High 1.000	ENGINE					Cloth: Black	Cloth	Reige	Cloth: Rise	`k
Number of valves1624Diston displacement Dore x strokecc2,3933,195Bore x strokemm (inch)92 x 90 (3.62×3.54)89 x 85.6 (3.5×3.37)10: 1Compression ratio Maximum output Maximum torque Luel distribution10: 110: 110: 1TRANSMISSION4AT5ATCaear ratio1st2.8263.5202nd1.4932.043Gear ratio1st2.8263.5202nd1.4932.043Caear ratio1st2.8263rd1.0001.401ChartM/A0.717Reverse2.7033.224Final gear ratio5.1253.583Transfer gear ratioHigh1.000	Number of cylinders		4		6			-		
Piston displacement Bore x strokecc $2,393$ $3,195$ $89 \times 85.6 (3.5 \times 3.37)$ Bore x strokemm (inch) $92 \times 90 (3.62 \times 3.54)$ $89 \times 85.6 (3.5 \times 3.37)$ Compression ratio10 : 110 : 1Maximum output Maximum torquehp @ rpm166 @ 6,000230 @ 6,200Maximum torque eluel distributionlb-ft @ rpm162 @ 4000213 @ 3,500Multi Point InjectionMulti Point InjectionMulti Point InjectionTRANSMISSION4AT5ATGear ratio1st2.8263.5202nd1.4932.043Ath0.6881.0004th0.6881.0004th0.6881.0005thN/A0.717Reverse2.7033.224Final gear ratio5.1253.583Gransfer gear ratioHigh1.000High1.0001.000	Number of valves					Leaulei. DidUK	Leathe	i. Deige	Leduler. Bl	aun
Bore x strokemm (inch)92 x 90 (3.62 x 3.54)89 x 85.6 (3.5 x 3.37)Compression ratio10 : 110 : 1Maximum outputhp @ rpm166 @ 6,000230 @ 6,200Maximum torquelb-ft @ rpm162 @ 4000213 @ 3,500Fuel distributionMulti Point InjectionMulti Point InjectionMulti Point InjectionTRANSMISSION4AT5ATGear ratio1st2.8263.5202nd1.4932.0433rd1.0001.4014th0.6881.0004th0.6881.0005thN/A0.717Reverse2.7033.224Final gear ratio5.1253.583Gransfer gear ratioHigh1.000High1.0001.000		сс								
Compression ratio Maximum output hp @ rpm10 : 1 166 @ 6,00010 : 1 230 @ 6,20010 : 1 230 @ 6,200Maximum torque distributionIb-ft @ rpm162 @ 4000 162 @ 4000213 @ 3,500 Multi Point InjectionImage: Compression ratio Multi Point InjectionImage: Compression ratio 213 @ 3,500 Multi Point InjectionImage: Compression ratio Multi Point InjectionImage: Compression ratio<	•			x 3.54)						
Maximum output Maximum torque Fuel distributionhp @ rpm166 @ 6,000 20 @ 6,200 213 @ 3,500 Multi Point Injection230 @ 6,200 213 @ 3,500 Multi Point InjectionTRANSMISSION4AT5ATGear ratio1st2.8263.520 2nd1.4932.0433rd1.0001.401MetallicPearl Blue MetallicSilky Silver MetallicPearl White Metallic3rd1.0001.401Cloth: BlackCloth: BlackCloth: Beige5thN/A0.717 Reverse2.7033.224Final gear ratio5.1253.583 3.583Silky SilverLeather: BlackLeather: BlackFinal gear ratioHigh1.0001.000Silky SilverHighHigh	Compression ratio	, , >=		,				and the second		
Maximum torque Fuel distributionIb-ft @ rpm162 @ 4000 Multi Point Injection213 @ 3,500 Multi Point InjectionFRANSMISSION4AT5ATGear ratio1st2.8263.520 2.0dSilky Silver MetallicPearl White Metallic3rd1.0001.401 4th0.6881.000MetallicCloth: BlackCloth: Black5thN/A0.717 ReverseSilzySilkyLeather: BlackLeather: BeigeFinal gear ratio5.1253.583 1.0001.000SilkySilkySilky		hp @ rpm		000						
Multi Point Injection Multi Point Injection Irransmission 4AT 5AT Gear ratio 1st 2.826 3.520 2nd 1.493 2.043 3rd 1.000 1.401 4th 0.688 1.000 5th N/A 0.717 Reverse 2.703 3.224 Final gear ratio 5.125 3.583 Irransfer gear ratio High 1.000									A AND AND	1
Gear ratio1st 2nd2.826 1.4933.520 2.043Pearl Blue MetallicSilky Silver MetallicPearl White Metallic3rd1.0001.401Image: Cloth: BlackCloth: BlackCloth: BlackCloth: BlackCloth: BlackCloth: BlackLeather: BlackLeathe	Fuel distribution							-1 0		C J
2nd1.4932.043MetallicMetallic3rd1.0001.401Cloth: BlackCloth: BlackCloth: Black4th0.6881.000Cloth: BlackCloth: BlackCloth: Black5thN/A0.717Leather: BlackLeather: BlackLeather: BlackFinal gear ratio5.1253.583Fransfer gear ratioHigh1.0001.000	TRANSMISSION		4AT	5AT		1		T		19
2nd1.4932.043MetallicMetallic3rd1.0001.401Cloth: BlackCloth: BlackCloth: Black4th0.6881.000Cloth: BlackCloth: BlackCloth: Black5thN/A0.717Leather: BlackLeather: BlackLeather: BlackFinal gear ratio5.1253.583Fransfer gear ratioHigh1.0001.000	Gear ratio	1st	2 8 2 6	3 5 2 0		Pearl Blue	Silky S	ilver	Pearl White	e
3rd 1.000 1.401 4th 0.688 1.000 5th N/A 0.717 Reverse 2.703 3.224 Final gear ratio 5.125 3.583 Irransfer gear ratio High 1.000 1.000							-			-
4th0.6881.000Cloth: BlackCloth: BlackLeather: Blac						wetanic	weidin		WELdIIL	
5th ReverseN/A0.7173.2243.224Final gear ratio5.125J.0001.000						Cloth: Black	Cloth:	Black	Cloth: Beig	ge
Still N/A 0.717						Leather: Black	Leathe	r: Black	Leather: Be	eige
Final gear ratio 5.125 3.583 Iransfer gear ratio High 1.000 1.000										-
Fransfer gear ratio High 1.000 1.000	Final goar ratio	Reverse								
		llich								
	iransier gear ratio	-								

SUZUKI SECURE ADVANTAGE PROTECTION: We are proud to deliver each 2010 Suzuki with Suzuki Secure Advantage Protection warranty. Coverage at no additional cost. The Suzuki Secure Advantage Protection plan features a 5-year/100,000 kilometre Powertain Warranty and 3-year/00,000 kilometre Rew Weithele Limited Warranty and a 5-year unlimited mileage Anti-Perforation warranty. All warranties are zero deductible and fully transferable at no cost. ROADSIDE ASSISTANCE: For added peace of mind, SUZUKI SECURE ADVANTAGE PROTECTION includes numerous roadside assistance benefits. Wherever you may be in Canada or the continental United States, should you require roadside service for towing due to collision or mechanical problems, battery boost, if you have run out of fuel, or locked your keys in your car, have a flat tire or require winching or extrication to get you back on the road, Suzuki Secure Advantage Roadside Assistance courses your 2010 Suzuki for 3 years with no mileage for displayser. This plan also features Trip Interruption benefits or you are more than 100 kilometers from home and your vehicle is undrivable for any reason, you can make alternate arrangements and request reimbursement for expenses incurred within 3 days and up to \$300. Suzuki Secure Advantage Roadside Assistance covers your 2010 Suzuki for 3 years with no mileage limitations. SUZUK INPORTECION PLAN: Should you plan to drive your new Suzuki farther or longer than the coverage provided by the suzuki New Vehicle limited Warranty, the Suzuki Protection Plan offers you affordable, cost-effective peace of mind in the event of unexpected mechanical failure or other roadside emergencies for up to 7 years or 140,000 kilometres. Suzuki Protection Plan offers a vast choice of coverage levels, terms and deductibles allowing you to select the specific plan best suited to your ownership requirements. Ask your Suzuki Katshi, Grand Vitara, SX4, Swift+ and Equator are registered trademarks of Suzuki Motor Coroporation of Japan. DRIVE RESPONSIBUX BUCKLE UP FOR SAF

Features & Specifications



