



2023
**LOW CAB
FORWARD**

Powerful. Capable. Maneuverable.

You may already know that Chevy Low Cab Forward offers an efficient and dependable lineup, with Regular Cab and Crew Cab configurations, a choice of powerful gas and diesel engines, and a wide range of wheelbases that enable a variety of upfits!¹

But you may not know that the agile cab-over design makes Low Cab Forward perfect in congested urban areas or tight jobsites where visibility is key.

Combine that with low cost of ownership and remarkable reliability, and you have a commercial vehicle that provides you with a smarter way to work.



4500 Low Cab Forward Crew Cab with an upfit from an independent supplier!¹

¹ Shown with upfit from an independent supplier. Equipment from independent suppliers is not covered by the GM New Vehicle Limited Warranty. GM is not responsible for the safety or quality of independent supplier alterations.

3500 and 4500 at a glance.

- 6.6L V8 gas engine
- 6-speed automatic transmission with double overdrive
- 350 horsepower and 425 lb.-ft. of torque
- Available in Regular Cab and Crew Cab
- GVWRs up to 14,500 lbs.¹
- Payloads up to 8,947 lbs.²
- Available in a range of wheelbases for body applications ranging from 10 ft. to 20 ft.
- Ladder-type frame with single-piece straight frame rails for strength and durability features standardized modular hole spacing and a clean, flat top for easier body mounting/upfit³
- New standard 4-wheel antilock disc brakes
- New Silver grille and LED headlamps
- Standard air conditioning, cruise control, and tilt and telescopic steering wheel
- 85-degree door openings with integrated entry step
- Available Mobileye,[®] which includes Forward Collision Alert⁴ and Lane Departure Warning⁴
- Available Rear Vision Camera⁵



3500 Low Cab Forward Regular Cab with an upfit from an independent supplier.³



4500 Low Cab Forward Crew Cab with an upfit from an independent supplier.³

¹ Low Cab Forward 4500. Maximum Gross Vehicle Weight Rating (GVWR). When properly equipped; includes weight of vehicle, passengers, cargo and equipment. ² Low Cab Forward 4500 Regular Cab with 109" wheelbase. These maximum payload ratings are intended for comparison purposes only. Before you buy a vehicle or use it to haul people or cargo, carefully review the Vehicle Loading section of the Owner's Manual and check the carrying capacity of your specific vehicle on the label on the inside of the driver door jamb. ³ Shown with upfit from an independent supplier. Equipment from independent suppliers is not covered by the GM New Vehicle Limited Warranty. GM is not responsible for the safety or quality of independent supplier alterations. ⁴ Read the Mobileye User Manual for important feature limitations and information. ⁵ Read the Alpine Owner's Manual included with the Rear Vision Camera system for important feature limitations and information.

4500 HD/XD and 5500 HD/XD at a glance.

- 5.2L turbocharged I-4 diesel engine
- 6-speed automatic transmission with double overdrive and Power Take-Off (PTO) capability
- 215 horsepower and 452 lb.-ft. of torque
- Available in Regular Cab and Crew Cab
- GVWRs up to 19,500 lbs.¹
- Payloads up to 12,997 lbs.²
- Available in a range of wheelbases for body applications ranging from 10 ft. to 24 ft.
- Ladder-type frame with single-piece straight frame rails for strength and durability features standardized modular hole spacing and a clean, flat top for easier body mounting/upfit³
- Standard 4-wheel antilock disc brakes
- Silver grille and LED headlamps
- Standard air conditioning, cruise control, and tilt and telescopic steering wheel
- 85-degree door openings with integrated entry step
- Available Advanced Driver Assistance System, including Adaptive Cruise Control,⁴ Automatic Emergency Braking,⁴ Forward Collision Alert⁴ and Lane Departure Warning⁴
- Available 35-gallon or 55-gallon fuel tank



4500 HD Low Cab Forward Regular Cab with an upfit from an independent supplier.³



5500 HD Low Cab Forward Regular Cab with an upfit from an independent supplier.³

¹ Low Cab Forward 5500 XD. Maximum Gross Vehicle Weight Rating (GVWR). When properly equipped; includes weight of vehicle, passengers, cargo and equipment. ² Low Cab Forward 5500 XD Regular Cab with 109" wheelbase. These maximum payload ratings are intended for comparison purposes only. Before you buy a vehicle or use it to haul people or cargo, carefully review the Vehicle Loading section of the Owner's Manual and check the carrying capacity of your specific vehicle on the label on the inside of the driver door jamb. ³ Shown with upfit from an independent supplier. Equipment from independent suppliers is not covered by the GM New Vehicle Limited Warranty. GM is not responsible for the safety or quality of independent supplier alterations. ⁴ Safety or driver assistance features are no substitute for the driver's responsibility to operate the vehicle in a safe manner. Read the vehicle Owner's Manual for important feature limitations and information.

6500 XD and 7500 XD at a glance.

- 6.7L Cummins® Turbo-Diesel engine
- Allison® 2550 Rugged Duty Series™ (RDS) 6-speed automatic transmission with double overdrive on 6500 XD
- Allison® 2500 Rugged Duty Series (RDS) 6-speed automatic transmission with double overdrive on 7500 XD
- 260 horsepower and 660 lb.-ft. of torque
- Standard Integrated Power Take-Off (PTO)
- Available in Regular Cab
- GVWRs up to 33,000 lbs!¹
- Payloads up to 22,657 lbs²
- Available in a range of wheelbases for body applications ranging from 14 ft. to 30 ft.
- Ladder-type frame with single-piece straight frame rails for strength and durability features standardized modular hole spacing and a clean, flat top for easier body mounting/upfit³
- Silver grille and LED headlamps
- Standard air conditioning, cruise control, and tilt and telescopic steering wheel
- 90-degree door openings with integrated entry step
- Available Mobileye®, which includes Forward Collision Alert⁴ and Lane Departure Warning⁴
- Available Rear Vision Camera⁵



6500 XD Low Cab Forward Regular Cab with an upfit from an independent supplier³



7500 XD Low Cab Forward Regular Cab with an upfit from an independent supplier³

¹ Low Cab Forward 7500 XD. Maximum Gross Vehicle Weight Rating (GVWR). When properly equipped; includes weight of vehicle, passengers, cargo and equipment. ² Low Cab Forward 7500 XD Regular Cab with 152" wheelbase. These maximum payload ratings are intended for comparison purposes only. Before you buy a vehicle or use it to haul people or cargo, carefully review the Vehicle Loading section of the Owner's Manual and check the carrying capacity of your specific vehicle on the label on the inside of the driver door jamb. ³ Shown with upfit from an independent supplier. Equipment from independent suppliers is not covered by the GM New Vehicle Limited Warranty. GM is not responsible for the safety or quality of independent supplier alterations. ⁴ Read the Mobileye User Manual for important feature limitations and information. ⁵ Read the Alpine Owner's Manual included with the Rear Vision Camera system for important feature limitations and information.

Model availability

● AVAILABLE – NOT AVAILABLE

REGULAR CAB



WHEELBASE (IN.)	3500/4500	4500 HD/XD	5500 HD/XD	6500 XD 7500 XD	CAB-TO-AXLE LENGTH (IN.)	CAB-TO-END-OF-FRAME LENGTH (IN.)
109.0	●	●	●	–	86.5	129.6
132.5	●	●	●	–	110.0	153.1
150.0	●	●	●	–	127.5	170.6
152.0	–	–	–	●	127.0	192.9
170.0	–	–	–	●	145.0	220.0
176.0	●	●	●	–	153.5	196.6
188.0	–	–	–	●	163.0	247.0
200.0	–	–	●	–	177.5	220.6
200.0	–	–	–	●	175.0	264.9
212.0	–	–	● ¹	–	189.5	232.6
212.0	–	–	–	●	187.0	283.1
224.0	–	–	–	●	199.0	301.0
236.0	–	–	–	●	211.0	319.1
248.0	–	–	–	●	223.0	337.0

CREW CAB



WHEELBASE (IN.)	3500/4500	4500 HD/XD	5500 HD/XD	6500 XD 7500 XD	CAB-TO-AXLE LENGTH (IN.)	CAB-TO-END-OF-FRAME LENGTH (IN.)
150.0	●	●	●	–	88.5	131.6
176.0	●	●	●	–	114.5	157.6

¹ 5500 XD model only.

Engine specifications



6.6L V8 GAS

Standard on 3500 and 4500 Gas models

350 hp @ 4500 rpm

425 lb.-ft. of torque @ 3800 rpm

Displacement: 6554 cc (400 cu. in.)

Bore and stroke: 103.25 mm x 98 mm (4.06 in. x 3.86 in.)

Compression ratio: 10.8:1

Alternator: 170 amps

Block: Cast-iron

Cylinder head: Cast-aluminum

Valvetrain: Overhead valve with Variable Valve Timing (VVT)

Fuel delivery: Direct Injection

Transmission: 6L90-E Hydra-Matic,[®] 6-speed automatic with double overdrive and lock-up converter

5.2L TURBOCHARGED INTERCOOLED I-4 DIESEL

Standard on 4500 HD/XD and 5500 HD/XD models

215 hp @ 2500 rpm

452 lb.-ft. of torque @ 1850 rpm

Displacement: 5193 cc (317 cu. in.)

Bore and stroke: 115 mm x 125 mm (4.53 in. x 4.92 in.)

Compression ratio: 16.5:1

Alternator: 140 amps

Block: Cast-iron

Cylinder head: Cast-iron

Valvetrain: Single overhead camshaft (SOHC), 16 valves (4 valves per cylinder)

Fuel delivery: Direct injection, high-pressure common rail

Transmission: Aisin[®] A465, 6-speed automatic with double overdrive and lock-up converter in 2nd-6th gears

6.7L TURBOCHARGED INTERCOOLED I-6 DIESEL

Standard on 6500 XD and 7500 XD models

260 hp @ 2400 rpm

660 lb.-ft. of torque @ 1600 rpm

Displacement: 6690 cc (408 cu. in.)

Bore and stroke: 107 mm x 124 mm (4.21 in. x 4.88 in.)

Compression ratio: 20.0:1

Alternator: 160 amps

Block: Cast-iron

Cylinder head: Cast-iron

Valvetrain: Cam-in-block

Fuel delivery: Direct Injection, high-pressure common rail

Transmission: Allison[®] 2550 Rugged Duty Series[™] (RDS), 6-speed automatic with double overdrive on 6500 XD
Allison[®] 2500 Rugged Duty Series (RDS), 6-speed automatic with double overdrive on 7500 XD

Payload and vehicle weight ratings

MODEL	WHEELBASE (IN.)	GVWR ¹ (LBS.)	MAX GCWR ² (LBS.)	MAX PAYLOAD ³ (LBS.) REGULAR CAB/ CREW CAB	AXLE RATIO	BODY LENGTH AVAILABLE (FT.) REGULAR CAB/ CREW CAB
3500 Gas	109.0	12,000	18,000	6,807	4.10	10–12
	132.5	12,000	18,000	6,707	4.10	14
	150.0	12,000	18,000	6,677/6,127	4.10	16–18/12
	176.0	12,000	18,000	6,627/6,077	4.10	20/16
4500 Gas	109.0	14,500	20,500	8,947	4.30	10–12
	132.5	14,500	20,500	8,867	4.30	14
	150.0	14,500	20,500	8,827/8,277	4.30	16/12
	176.0	14,500	20,500	8,787/8,237	4.30	18–20/16
4500 HD	109.0	14,500	20,500	8,511	4.56	12
	132.5	14,500	20,500	8,431	4.56	14
	150.0	14,500	20,500	8,397/7,808	4.56	16–18/12
	176.0	14,500	20,500	8,350/7,748	4.56	20/16
4500 XD	109.0	16,000	22,000	9,605	4.77	10–12
	132.5	16,000	22,000	9,526	4.77	14
	150.0	16,000	22,000	9,492	4.77	16–18/12
	176.0	16,000	22,000	9,445	4.77	18–20/16
5500 HD	109.0	17,950	23,950	11,463	5.12	10
	132.5	17,950	23,950	11,377	5.12	12–14
	150.0	17,950	23,950	11,340/10,750	5.12	16–18/12
	176.0	17,950	23,950	11,290/10,688	5.12	20/16
	200.0	17,950	23,950	10,988	5.12	22

¹ Maximum Gross Vehicle Weight Rating (GVWR). When properly equipped; includes weight of vehicle, passengers, cargo and equipment. ² Gross Combination Weight Rating (GCWR). When properly equipped; includes weight of the vehicle and trailer combination, including the weight of driver, passengers, fuel, optional equipment and cargo in the vehicle and trailer. ³ These maximum payload ratings are intended for comparison purposes only. Before you buy a vehicle or use it to haul people or cargo, carefully review the Vehicle Loading section of the Owner's Manual and check the carrying capacity of your specific vehicle on the label on the inside of the driver door jamb.

Payload and vehicle weight ratings (continued)

MODEL	WHEELBASE (IN.)	GVWR ¹ (LBS.)	MAX GCWR ² (LBS.)	MAX PAYLOAD ³ (LBS.) REGULAR CAB/ CREW CAB	AXLE RATIO	BODY LENGTH AVAILABLE (FT.) REGULAR CAB/ CREW CAB
5500 XD	109.0	19,500	25,550	12,997	5.57	10
	132.5	19,500	25,550	12,912	5.57	12–14
	150.0	19,500	25,550	12,875/12,284	5.57	16/12
	176.0	19,500	25,550	12,824/12,221	5.57	18–20/16
	200.0	19,500	25,550	12,522	5.57	22
	212.0	19,500	25,550	12,476	5.57	24
6500 XD	152.0	25,950	30,000	15,932	4.88	14–16
	170.0	25,950	30,000	15,854	4.88	18
	188.0	25,950	30,000	15,550	4.88	20
	200.0	25,950	30,000	15,306	4.88	22
	212.0	25,950	30,000	15,218	4.88	24
	224.0	25,950	30,000	14,974	4.88	26
	236.0	25,950	30,000	14,852	4.88	28
	248.0	25,950	30,000	14,730	4.88	30
7500 XD	152.0	33,000	33,000	22,657	5.57	14–16
	170.0	33,000	33,000	22,579	5.57	18
	188.0	33,000	33,000	22,064	5.57	20
	200.0	33,000	33,000	21,943	5.57	22
	212.0	33,000	33,000	21,820	5.57	24
	224.0	33,000	33,000	21,699	5.57	26
	236.0	33,000	33,000	21,577	5.57	28
	248.0	33,000	33,000	21,455	5.57	30

¹ Maximum Gross Vehicle Weight Rating (GVWR). When properly equipped; includes weight of vehicle, passengers, cargo and equipment. ² Gross Combination Weight Rating (GCWR). When properly equipped; includes weight of the vehicle and trailer combination, including the weight of driver, passengers, fuel, optional equipment and cargo in the vehicle and trailer. ³ These maximum payload ratings are intended for comparison purposes only. Before you buy a vehicle or use it to haul people or cargo, carefully review the Vehicle Loading section of the Owner's Manual and check the carrying capacity of your specific vehicle on the label on the inside of the driver door jamb.

● STANDARD ○ AVAILABLE – NOT AVAILABLE

	3500/4500 GAS	4500 HD/XD	5500 HD/XD	6500 XD	7500 XD
SAFETY AND DRIVER ASSISTANCE					
Advanced Driver Assistance System – Adaptive Cruise Control ¹ Automatic Emergency Braking ¹ Lane Departure Warning ¹ and Forward Collision Alert ¹ (not available with Forward Collision Alert and Lane Departure Warning [Mobileye ^{®2}])	–	○	○	–	–
Automatic Emergency Braking ¹ (requires available Advanced Driver Assistance System)	–	○	○	–	–
Back-up alarm (Port Installed Option)	○	○	○	○	○
Fire extinguisher and safety triangle, includes storage/mounting provisions (Port Installed Option)	○	○	○	–	–
– 2.5 lbs. dry chemical BC-rated (Port Installed Option)	–	–	–	○	○
– 5.0 lbs. dry chemical BC-rated (Port Installed Option)	–	–	–	○	○
Forward Collision Alert and Lane Departure Warning (Mobileye ²) (Port Installed Option)	○	○	○	○	○
Forward Collision Alert ¹ (requires available Advanced Driver Assistance System)	–	○	○	–	–
Lane Departure Warning ¹ (requires available Advanced Driver Assistance System)	–	○	○	–	–
Rear Vision Camera ³ – display integrated into radio (requires available enhanced audio system; shipped loose in cab) (Port Installed Option)	○	○	○	○	○
MECHANICAL					
Air cleaner – heavy-duty with 11" diameter dry single paper element, back of cab location	●	●	●	●	●
Axle – limited-slip	○	–	–	–	–
Axle, front – 6,830 lbs., reverse Elliot I-beam (3500/4500 Gas, 4500 HD/XD and 5500 HD)	●	●	●	–	–
– 7,275 lbs., reverse Elliot I-beam (5500 XD)	–	–	●	–	–
– 12,000 lbs., Dana E1254-W	–	–	–	●	●
Axle ratio – 4.10 (3500 Gas)	●	–	–	–	–
– 4.30 (4500 Gas)	●	–	–	–	–
– 4.56 (4500 HD)	–	●	–	–	–
– 4.77 (4500 XD)	–	●	–	–	–
– 4.88 (6500 XD)	–	–	–	●	–
– 5.12 (5500 HD)	–	–	●	–	–
– 5.57 (5500 XD and 7500 XD, available on 6500 XD)	–	–	●	○	●
Axle, rear – 11,020 lbs.	–	●	–	–	–
– 14,550 lbs.	●	–	●	–	–
– 19,000 lbs., full-floating single-speed Dana Spicer S19-140	–	–	–	●	–
– 21,000 lbs., full-floating single-speed Dana Spicer S21-140	–	–	–	–	●
Battery – single, heavy-duty, 750 cold-cranking amps (CCA), frame-mounted battery box	●	–	–	–	–
– single, heavy-duty, absorbed glass mat, 825 cold-cranking amps (CCA) (Port Installed Option)	○	–	–	–	–
– dual, heavy-duty, 750 cold-cranking amps (CCA)	–	●	●	●	●
– dual, heavy-duty, absorbed glass mat, 825 cold-cranking amps (CCA) (Port Installed Option)	–	○	○	○	○
Brake – parking, cable actuated, internal expanding drum, transmission-mounted	●	●	●	–	–
– parking, air, cable actuated, internal expanding drum, transmission-mounted	–	–	–	●	●

	3500/4500 GAS	4500 HD/XD	5500 HD/XD	6500 XD	7500 XD
MECHANICAL (CONTINUED)					
Brakes – 4-wheel antilock, 4-wheel disc	●	–	–	–	–
– 4-wheel antilock, 4-wheel disc with traction control and stability control	–	●	●	–	–
– 4-wheel antilock, dual circuit air	–	–	–	●	●
Engine – 6.6L V8 gas with Direct Injection, engine oil cooler and high-idle mode (1200 rpm); 350 hp @ 4500 rpm, 425 lb.-ft. of torque @ 3800 rpm	●	–	–	–	–
Engine – 5.2L turbocharged intercooled I-4 diesel with common rail Direct Injection and Diesel Exhaust Brake System; 215 hp @ 2500 rpm, 452 lb.-ft. of torque @ 1850 rpm	–	●	●	–	–
Engine – 6.7L Cummins [®] turbocharged intercooled I-6 diesel with common rail Direct Injection and Diesel Exhaust Brake System; 260 hp @ 2400 rpm, 660 lb.-ft. of torque @ 1600 rpm	–	–	–	●	●
– engine block heater (Port Installed Option)	○	○	○	○	○
– engine oil pan heater (requires available Cold Climate Package on 6500 XD and 7500 XD) (Port Installed Option)	–	○	○	○	○
– engine shutdown, automatic; high water temperature, low water level and low oil pressure (Port Installed Option)	–	○	○	○	○
– engine shutdown, automatic; 3-minute timer (Port Installed Option)	–	○	○	○	○
– engine shutdown, automatic; 5-minute timer (Port Installed Option)	–	○	○	○	○
Exhaust system – single outlet horizontal	●	●	●	●	●
– single outlet vertical with DPF (restrictions apply; see your dealer or Fleet representative for details) (Port Installed Option)	–	○	○	–	–
Frame – ladder-type channel frame, full C-section straight frame 33.5" wide; yield strength 44,000 psi, section modulus 7.2 cu. in. and RBM 316,800 lb.-in. per rail (requires Regular Cab on 4500 HD/XD or 5500 HD/XD)	●	●	●	–	–
– ladder-type channel frame, full C-section straight frame 33.5" wide; yield strength 44,000 psi, section modulus 11.89 cu. in. and RBM 523,160 lb.-in. per rail (requires Crew Cab on 4500 HD/XD or 5500 HD/XD)	–	●	●	–	–
– ladder-type channel frame, full C-section straight frame 33.5" wide; yield strength 80,000 psi, section modulus 12.69 cu. in. and RBM 1,015,000 lb.-in. per rail	–	–	–	●	●
Fuel cap – locking Diesel Exhaust Fuel (DEF) cap (Port Installed Option)	–	○	○	–	–
– locking Diesel Exhaust Fuel (DEF) cap, keyed alike (Port Installed Option)	–	○	○	–	–
Fuel tank – 38.6 gallons, rectangular fuel tank mounted between frame rails	●	–	–	–	–
– 30 gallons, stainless steel, includes 2 auxiliary fuel ports	–	●	●	–	–
– 35 gallons, aluminum, driver-side mounted (requires 150" or 176" wheelbase)	–	○	○	–	–
– 50 gallons, rectangular fuel tank mounted on left-hand frame rail (standard on 152" and 170" wheelbase models, available on 6500 XD 188," 200," 212" and 224" wheelbase models)	–	–	–	●	●
– 55 gallons, aluminum, driver-side mounted (requires 176" wheelbase)	–	○	○	–	–
– 100 gallons, rectangular fuel tank mounted on left-hand frame rail (standard on 188," 200," 212," 224," 236" and 248" wheelbase models)	–	–	–	●	●
Governor – speed limited to 58 mph (Port Installed Option)	–	○	○	○	○
– speed limited to 65 mph (Port Installed Option)	○	○	○	○	○
– speed limited to 68 mph (Port Installed Option)	–	○	○	○	○
– speed limited to 70 mph (Port Installed Option)	–	○	○	○	○

¹ Safety or driver assistance features are no substitute for the driver's responsibility to operate the vehicle in a safe manner. Read the vehicle Owner's Manual for important feature limitations and information. ² Read the Mobileye User Manual for important feature limitations and information. ³ Read the Alpine Owner's Manual included with the Rear Vision Camera system for important feature limitations and information.

● STANDARD ○ AVAILABLE – NOT AVAILABLE

	3500/4500 GAS	4500 HD/XD	5500 HD/XD	6500 XD	7500 XD
MECHANICAL (CONTINUED)					
Power Take-Off – instrument panel-mounted controls plus calibrations (Port Installed Option)	–	○	○	○	○
Steering – integral hydraulic power	●	●	●	●	●
– ratio 18.8-20.9:1	●	●	●	–	–
– ratio 22.4:1	–	–	–	●	●
Suspension, front – 6,830 lbs. tapered-leaf, semi-elliptical steel alloy (3500/4500 Gas and 4500 HD)	●	●	–	–	–
– 8,440 lbs. tapered-leaf, semi-elliptical steel alloy (4500 XD, 5500 HD/XD)	–	●	●	–	–
– 12,000 lbs. tapered-leaf, semi-elliptical steel alloy	–	–	–	●	●
Suspension, rear – 9,880 lbs. multi-leaf, semi-elliptical steel alloy (4500 HD)	–	●	–	–	–
– 12,900 lbs. multi-leaf, semi-elliptical steel alloy	●	–	–	–	–
– 14,308 lbs. multi-leaf, semi-elliptical steel alloy (4500 XD)	–	●	–	–	–
– 14,550 lbs. multi-leaf, semi-elliptical steel alloy (5500 HD/XD)	–	–	●	–	–
– 21,000 lbs. multi-leaf, semi-elliptical steel alloy	–	–	–	●	●
– 23,000 lbs. air springs, with shock absorbers and instrument-panel mounted fill/empty switch	–	–	–	○	○
Transmission – 6-speed automatic, 6L90-E Hydra-Matic	●	–	–	–	–
– 6-speed automatic with double overdrive, Aisin A465	–	●	●	–	–
– 6-speed automatic with double overdrive, Allison 2550 Rugged Duty Series™ (RDS) includes park pawl	–	–	–	●	–
– 6-speed automatic with double overdrive, Allison 2500 Rugged Duty Series (RDS)	–	–	–	–	●
Cold Climate Package – includes engine block heater and oil pan heater (Port Installed Option)	–	○	○	○	○
EXTERIOR					
Assist steps	●	●	●	●	●
Daytime running lamps	●	●	●	●	●
Front end – film protection (Port Installed Option)	○	○	○	–	–
Glass – tinted	●	●	●	●	●
Grille – Silver	●	●	●	●	●
– chrome (Port Installed Option)	○	○	○	○	○
Headlamps – LED	●	●	●	●	●
Mirrors – vertical with convex mirrors	●	●	●	●	●
– heated (Port Installed Option)	○	○	○	–	–
– heated, power-adjustable (Port Installed Option)	○	○	○	–	–
– heated; for 96" wide body (Port Installed Option)	–	–	–	○	○
– heated, power adjustable flat mirrors; for 96" wide body (Port Installed Option)	–	–	–	○	○
– vertical with convex mirrors; for 102" wide body (Port Installed Option)	–	–	–	○	○
– vertical with convex mirrors, heated; for 102" wide body (Port Installed Option)	–	–	–	○	○
– vertical with convex mirrors, heated, power-adjustable flat mirrors; for 102" wide body (Port Installed Option)	–	–	–	○	○
– bracket extension, adapts mirrors for 102" wide body (Port Installed Option)	○	○	○	–	–

	3500/4500 GAS	4500 HD/XD	5500 HD/XD	6500 XD	7500 XD
EXTERIOR (CONTINUED)					
Roof air deflector (requires Regular Cab) (Port Installed Option)	○	○	○	–	–
Tires – front 215/85R16E low rolling resistance, all-season (3500 Gas and 4500 HD)	●	●	–	–	–
– front 225/70R19.5G low rolling resistance, all-season (4500 Gas)	●	–	–	–	–
– front 215/85R16E low rolling resistance, highway, re-treadable (requires available rear 215/85R16E re-treadable highway tires) (4500 HD)	–	○	–	–	–
– front 225/70R19.5F low rolling resistance, all-season (4500 XD and 5500 HD/XD)	–	●	●	–	–
– front 225/70R22.5H low rolling resistance, highway (6500 XD)	–	–	–	●	–
– front 11R22.5G low rolling resistance, highway (requires available rear 11R22.5G low rolling resistance highway tires and 5.57 axle ratio on 6500 XD)	–	–	–	○	●
Tires – rear 215/85R16E low rolling resistance, all-season (3500 Gas and 4500 HD)	●	●	–	–	–
– rear 225/70R19.5G low rolling resistance, all-season (4500 Gas)	●	–	–	–	–
– rear 215/85R16E low rolling resistance, highway, re-treadable (requires available front 215/85R16E re-treadable highway tires) (4500 HD)	–	○	–	–	–
– rear 225/70R19.5F low rolling resistance, all-season (4500 XD and 5500 HD/XD)	–	●	●	–	–
– rear 225/70R22.5H low rolling resistance, highway (6500 XD)	–	–	–	●	–
– rear 11R22.5G low rolling resistance, highway (requires available front 11R22.5G low rolling resistance highway tires and 5.57 axle ratio on 6500 XD)	–	–	–	○	●
Wheels – 16" x 6" steel (3500 Gas and 4500 HD)	●	●	–	–	–
– 19.5" x 6" steel (4500 Gas, 4500 XD and 5500 HD/XD)	●	●	●	–	–
– 22.5" x 8.25" steel, White-painted	–	–	–	●	●
– 22.5" x 8.25" aluminum, set of 6 (PWI)	–	–	–	○	○
– 22.5" x 8.25" aluminum, set of 4 aluminum and 2 steel rear inner wheels (Port Installed Option)	–	–	–	○	○
– 22.5" x 8.25" aluminum, set of 6 aluminum wheels (Port Installed Option)	–	–	–	○	○
Windshield wipers – pulse, wet-arm	●	●	●	●	●
LED Lighting Package – upgrade exterior and interior incandescent light bulbs to LED (Port Installed Option)	○	○	○	○	○

● STANDARD ○ AVAILABLE – NOT AVAILABLE


	3500/4500 GAS	4500 HD/XD	5500 HD/XD	6500 XD	7500 XD
INTERIOR					
Air conditioning – single-zone	●	●	●	●	●
CAN interface converter/adaptor (Port Installed Option)	–	○	○	–	–
Cruise control – electronic	●	●	●	●	●
– cruise control delete (Port Installed Option)	○	○	○	○	○
– Adaptive Cruise Control ¹ (requires available Advanced Driver Assistance System)	–	○	○	–	–
Cup holders	●	●	●	●	●
Door locks – power	●	●	●	●	●
Driver Information Center	●	●	●	●	●
Floor mats	●	●	●	●	●
Key system – extra set of keys; provides customer with a total of 4 keys (Port Installed Option)	○	○	○	○	○
Lighting – interior dome	●	●	●	●	●
– rear dome and body lamp switch (Port Installed Option)	○	○	○	○	○
Remote Keyless Entry (Port Installed Option)	○	○	○	○	○
Seat belts – Black	●	●	●	●	●
– Orange, driver seat only (Port Installed Option)	○	○	○	○	○
– Orange, driver and front passenger seat only (Port Installed Option)	○	○	○	○	○
Steering column – tilt and telescopic	●	●	●	●	●
Steering wheel – urethane	●	●	●	●	●
Windows – power	●	●	●	●	●

	3500/4500 GAS	4500 HD/XD	5500 HD/XD	6500 XD	7500 XD
SEATING					
Seats – tricot cloth-covered, reclining high-back driver and outboard front passenger seats with fold-flat center seat	●	●	●	–	–
– adjustable torsion-bar suspension system for driver seat only (Regular Cab) (Port Installed Option)	○	○	○	–	–
– tricot cloth-covered, reclining high-back bucket driver and outboard front passenger seats with fold-flat center seat; air-ride suspension system on driver seat only	–	–	–	●	●
Seat covers – all seating positions (Port Installed Option)	○	○	○	○	○
ENTERTAINMENT					
Audio – AM/FM stereo with CD player, auxiliary input jack, USB port ² and Bluetooth ^{®3}	●	●	●	●	●
– 7-inch diagonal color touch-screen, AM/FM stereo, Bluetooth audio streaming; ³ Apple CarPlay ^{®4} and Android Auto ^{™5} compatibility, and SiriusXM [®] capable (Port Installed Option)	○	○	○	○	○
– enhanced 7-inch diagonal color touch-screen, AM/FM stereo, Bluetooth audio streaming; ³ Apple CarPlay ⁴ and Android Auto ⁵ compatibility, and SiriusXM capable; includes Rear Vision Camera ¹ (Port Installed Option)	○	○	○	○	○
– radio delete (Port Installed Option)	○	○	○	○	○
– 2-speaker system	●	●	●	●	●

¹ Safety or driver assistance features are no substitute for the driver's responsibility to operate the vehicle in a safe manner. Read the vehicle Owner's Manual for important feature limitations and information. ² Not compatible with all devices. ³ Go to my.chevrolet.com/learnAbout/bluetooth to find out which phones are compatible with the vehicle. Full Bluetooth feature functionality varies by device, model and software version. ⁴ Vehicle user interface is a product of Apple and its terms and privacy statements apply. Requires compatible iPhone and data plan rates apply. ⁵ Vehicle user interface is a product of Google and its terms and privacy statements apply. To use Android Auto on your car display, you'll need an Android phone running Android 6 or higher, an active data plan, and the Android Auto app.

DIMENSIONS





REGULAR CAB	3500	4500	4500 HD	4500 XD	5500 HD	5500 XD	6500 XD	7500 XD
A – Track (in.)	65.0	65.0	65.6	65.6	65.6	65.6	72.2	72.2
B – Width (in.)	81.3	81.3	81.3	81.3	81.3	81.3	93.5	93.5
C – Height (in.)	90.0	90.9	90.8	92.4	92.4	92.4	112.0	112.0
D – Cab to end of frame (in.)	129.6/153.1/ 170.6/196.6	129.6/153.1/ 170.6/196.6	129.6/153.1/ 170.6/196.6	129.6/153.1/ 170.6/196.6	129.6/153.1/ 170.6/196.6/220.6	129.6/153.1/170.6/ 196.6/220.6/232.6	192.9/220.0/247.0/264.9/ 283.1/301.0/319.1/337.0	192.9/220.0/247.0/264.9/ 283.1/301.0/319.1/337.0
E – Cab to axle (in.)	86.5/110.0/ 127.5/153.5	86.5/110.0/ 127.5/153.5	86.5/110.0/ 127.5/153.5	86.5/110.0/ 127.5/153.5	86.5/110.0/ 127.5/153.5/177.5	86.5/110.0/127.5/ 153.5/177.5/189.5	127.0/145.0/163.0/175.0/ 187.0/199.0/211.0/223.0	127.0/145.0/163.0/175.0/ 187.0/199.0/211.0/223.0
Frame width, rear (in.)	33.5	33.5	33.5	33.5	33.5	33.5	33.5	33.5
F – Wheelbase (in.)	109.0/132.5/ 150.0/176.0	109.0/132.5/ 150.0/176.0	109.0/132.5/ 150.0/176.0	109.0/132.5/ 150.0/176.0	109.0/132.5/ 150.0/176.0/200.0	109.0/132.5/150.0/ 176.0/200.0/212.0	152.0/170.0/188.0/200.0/ 212.0/224.0/236.0/248.0	152.0/170.0/188.0/200.0/ 212.0/224.0/236.0/248.0
G – Length (in.)	200.5/224.0/ 241.5/267.5	200.5/224.0/ 241.5/267.5	200.5/224.0/ 241.5/267.5	200.5/224.0/ 241.5/267.5	200.5/224.0/ 241.5/267.5/291.5	200.5/224.0/241.5/ 267.5/291.5/303.5	274.4/301.5/328.5/346.4/ 364.6/382.5/400.6/418.5	274.4/301.5/328.5/346.4/ 364.6/382.5/400.6/418.5
Fuel tank capacity (gal.)	38.6	38.6	30 (standard) 35 (available) ¹ 55 (available) ²	30 (standard) 35 (available) ¹ 55 (available) ²	30 (standard) 35 (available) ¹ 55 (available) ²	30 (standard) 35 (available) ¹ 55 (available) ²	50 (152"/170" wheelbase) 100 (all other wheelbases)	50 (152"/170" wheelbase) 100 (all other wheelbases)
Payload range ³ (lbs.)	6,807/6,707/ 6,677/6,627	8,947/8,867/ 8,827/8,787	8,511/8,431/ 8,397/8,350	9,605/9,526/ 9,492/9,445	11,463/11,377/11,340/ 11,290/10,988	12,997/12,912/12,875/ 12,824/12,522/12,476	15,932/15,854/15,550/15,306/ 15,218/14,974/14,852/14,730	22,657/22,579/22,064/21,943/ 21,820/21,699/21,577/21,455
GVWR ⁴ (lbs.)	12,000	14,500	14,500	16,000	17,950	19,500	25,950	33,000
GCWR ⁵ (lbs.)	18,000	20,500	20,500	22,000	23,950	25,500	30,000	33,000

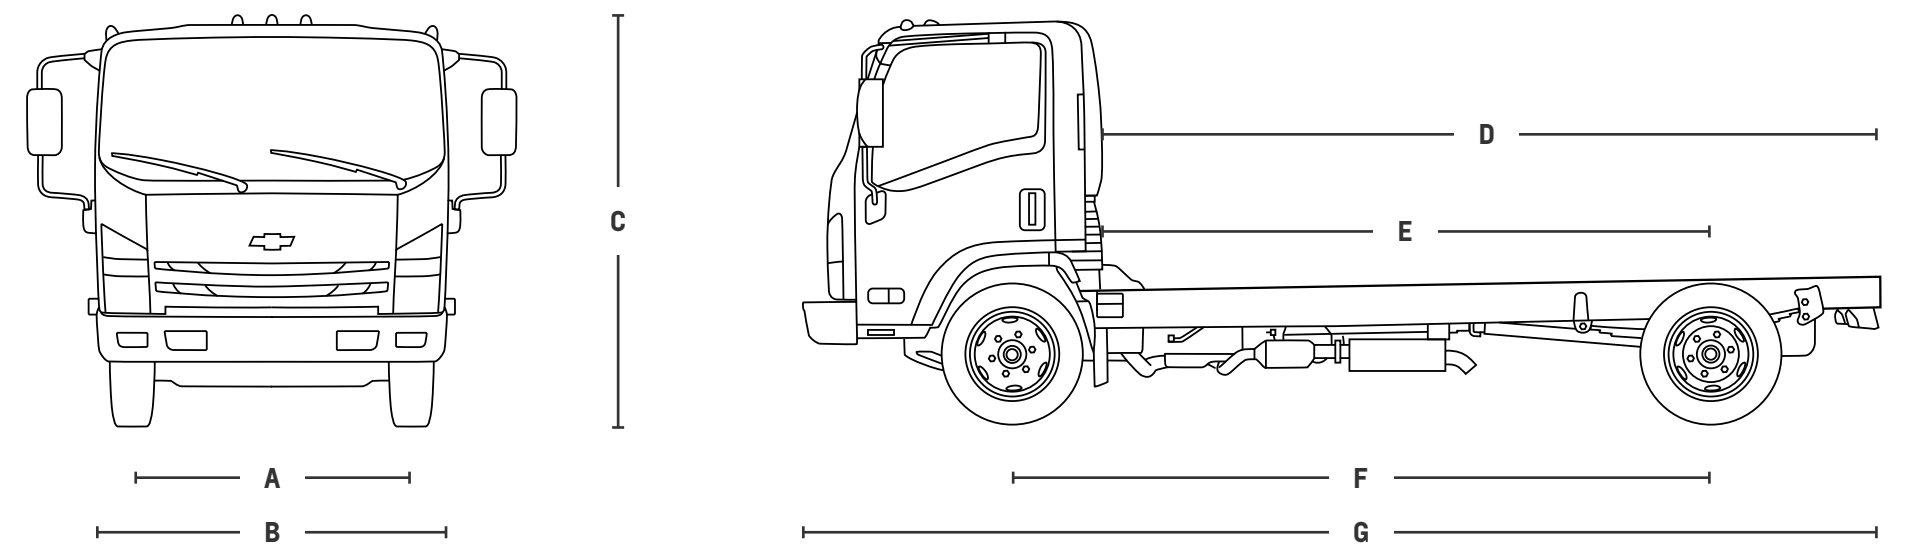

¹ Requires 150" or 176" wheelbase. ² Requires 176" wheelbase. ³ These maximum payload ratings are intended for comparison purposes only. Before you buy a vehicle or use it to haul people or cargo, carefully review the Vehicle Loading section of the Owner's Manual and check the carrying capacity of your specific vehicle on the label on the inside of the driver door jamb. ⁴ Maximum Gross Vehicle Weight Rating (GVWR). When properly equipped; includes weight of vehicle, passengers, cargo and equipment. ⁵ Gross Combination Weight Rating (GCWR). When properly equipped; includes weight of the vehicle and trailer combination, including the weight of driver, passengers, fuel, optional equipment and cargo in the vehicle and trailer.

DIMENSIONS

CREW CAB	3500	4500	4500 HD	4500 XD	5500 HD	5500 XD
A – Track (in.)	65.0	65.0	65.6	65.6	65.6	65.6
B – Width (in.)	81.3	81.3	81.3	81.3	81.3	81.3
C – Height (in.)	90.0	90.9	90.8	92.4	92.4	92.4
D – Cab to end of frame (in.)	131.6/157.6	131.6/157.6	131.6/157.6	131.6/157.6	131.6/157.6	131.6/157.6
E – Cab to axle (in.)	88.5/114.5	88.5/114.5	88.5/114.5	88.5/114.5	88.5/114.5	88.5/114.5
Frame width, rear (in.)	33.5	33.5	33.5	33.5	33.5	33.5
F – Wheelbase (in.)	150.0/176.0	150.0/176.0	150.0/176.0	150.0/176.0	150.0/176.0	150.0/176.0
G – Length (in.)	241.5/267.5	241.5/267.5	241.5/267.5	241.5/267.5	241.5/267.5	241.5/267.5
Fuel tank capacity (gal.)	38.6	38.6	30.0 (standard) 35.0 (available) ¹ 55.0 (available) ²	30.0 (standard) 35.0 (available) ¹ 55.0 (available) ²	30.0 (standard) 35.0 (available) ¹ 55.0 (available) ²	30.0 (standard) 35.0 (available) ¹ 55.0 (available) ²
Payload range ³ (lbs.)	6,127/6,077	8,277/8,237	7,808/7,748	8,901/8,842	10,750/10,688	12,284/12,221
GVWR ⁴ (lbs.)	12,000	14,500	14,500	16,000	17,950	19,500
GCWR ⁵ (lbs.)	18,000	20,500	20,500	22,000	23,950	25,500

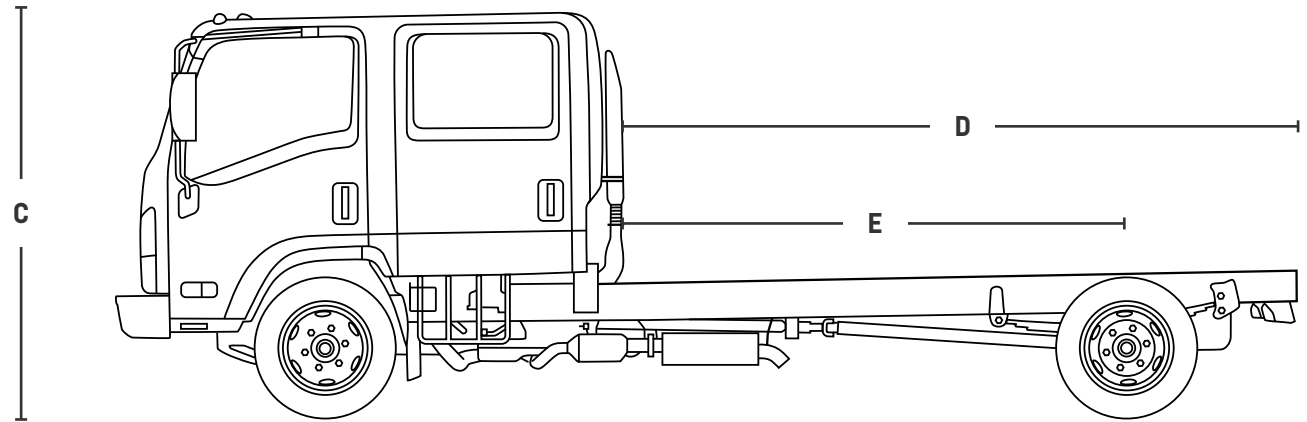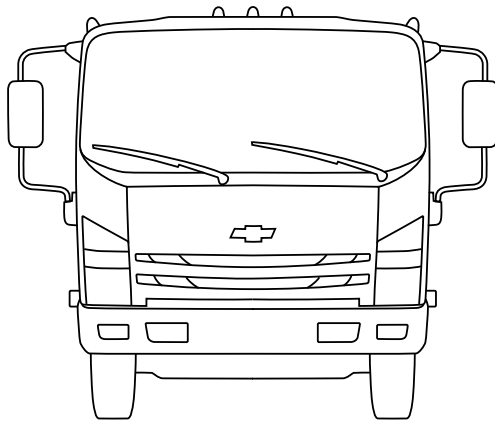

¹ Requires 150" or 176" wheelbase. ² Requires 176" wheelbase. ³ These maximum payload ratings are intended for comparison purposes only. Before you buy a vehicle or use it to haul people or cargo, carefully review the Vehicle Loading section of the Owner's Manual and check the carrying capacity of your specific vehicle on the label on the inside of the driver door jamb. ⁴ Maximum Gross Vehicle Weight Rating (GVWR). When properly equipped; includes weight of vehicle, passengers, cargo and equipment.

⁵ Gross Combination Weight Rating (GCWR). When properly equipped; includes weight of the vehicle and trailer combination, including the weight of driver, passengers, fuel, optional equipment and cargo in the vehicle and trailer.

Always ready for overtime.

You know what Chevrolet Commercial Vehicles call 9 to 5? A decent start. Our lineup is ready to make light work of a long week, led by the powerful and dependable Silverado 1500 and Silverado HD, plus Silverado 3500 HD Chassis Cab. And let's not forget the strength of medium-duty Silverado 4500 HD/5500 HD/6500 HD Chassis Cabs, the maneuverability of the Low Cab Forward series and the utility of Express Vans. It all adds up to an unbeatable crew that never stops working.



**COMMERCIAL
VEHICLES**



Commercial programs

OnStar Business Solutions

OnStar Business Solutions is a family of products that offers insight to help find efficiencies, foresight to make better decisions, and confidence in knowing your people and your assets are protected and connected. Learn more at onstar.com/BusinessSolutions.

Manage the way your business moves with OnStar Vehicle Insights™¹ by OnStar Business Solutions. You can see your fleet in real time and receive actionable information to make more informed decisions. Learn more at onstarvehicleinsights.com.

Business Elite Dealers

These specialized dealers are staffed with commercially focused teams that provide the support and service necessary to help build and maintain your vehicle fleet. In addition, these experts are dedicated to helping you configure the right vehicles for the job to give your business a competitive edge.

Just as importantly, every Business Elite service department has the facilities, tools and technicians for your needs. Learn more at chevrolet.com/commercial/business-elite.



¹ Terms apply. Available on select properly equipped 2015 model year and newer GM vehicles (excludes Volt, Low Cab Forward Trucks and GM vehicles built without OnStar Hardware, which includes but is not limited to select base Chevrolet and GMC trucks). Requires an active connected vehicle services plan. Fees, services, and availability subject to change without notice. Applicable taxes not included. Does not include emergency or security services. Diagnostics capabilities vary by vehicle model. Not all issues will deliver alerts. See onstarvehicleinsights.com for details and limitations.



You may also want to consider Silverado 4500 HD, 5500 HD or 6500 HD. For more details, go to chevrolet.com/commercial/silverado-chassis-cab.

Important information.

You may be discovering Chevrolet through a personalized online shopping experience or enjoying every year of vehicle ownership. Either way, we're committed to providing the tools and programs you need to help you get the most out of your journey.

Chevy MyWay¹ >

Engage in a real-time virtual video experience with a Chevy product specialist.

Chevrolet Complete Care >

Enjoy an owner benefit program that provides excellent service and support from day one.

Limited Warranty Coverage >

Discover all the ways Chevrolet is committed to providing an excellent ownership experience.



GM, the GM logo, Chevrolet, the Chevrolet logo, and the slogans, emblems, vehicle model names, vehicle body designs and other marks appearing in this brochure are the trademarks and/or service marks of General Motors, its subsidiaries, affiliates or licensors. ©2023 OnStar LLC. All rights reserved. Sirius, XM, SiriusXM and all related marks and logos are trademarks of Sirius XM Radio Inc. Aisin is a registered trademark of the Aisin Corporation. Allison is a registered trademark and Rugged Duty Series is a trademark of Allison Transmission Inc. Apple CarPlay, iPhone, Siri and Apple Music are trademarks of Apple Inc., registered in the U.S. and other countries. The Bluetooth word mark is a registered trademark owned by Bluetooth SIG, Inc., and any use of such mark by Chevrolet is under license. Cummins is a registered trademark of Cummins Inc. Android, Google Play and Android Auto are trademarks of Google LLC. Mobileye is a registered trademark of Mobileye Vision Technologies Ltd.

©2023 General Motors. All rights reserved. January 2023

FIND NEW ROADS™

CHEVROLET.COM

¹ Chevy MyWay is available to anyone over 18 in the United States to access and experience via chevrolet.com/myway.