


# **READY-TO-RACE LIMITED EDITION**

Engine Type: 2000 DOHC 16 valve ECI-MULTI with Intercooled Turbocharger.

Max. output: 206kW (280ps) 6,500rpm Max. torque: 373Nm (38.0kg/m) 3,000rpm Drive system: Full-time 4WD






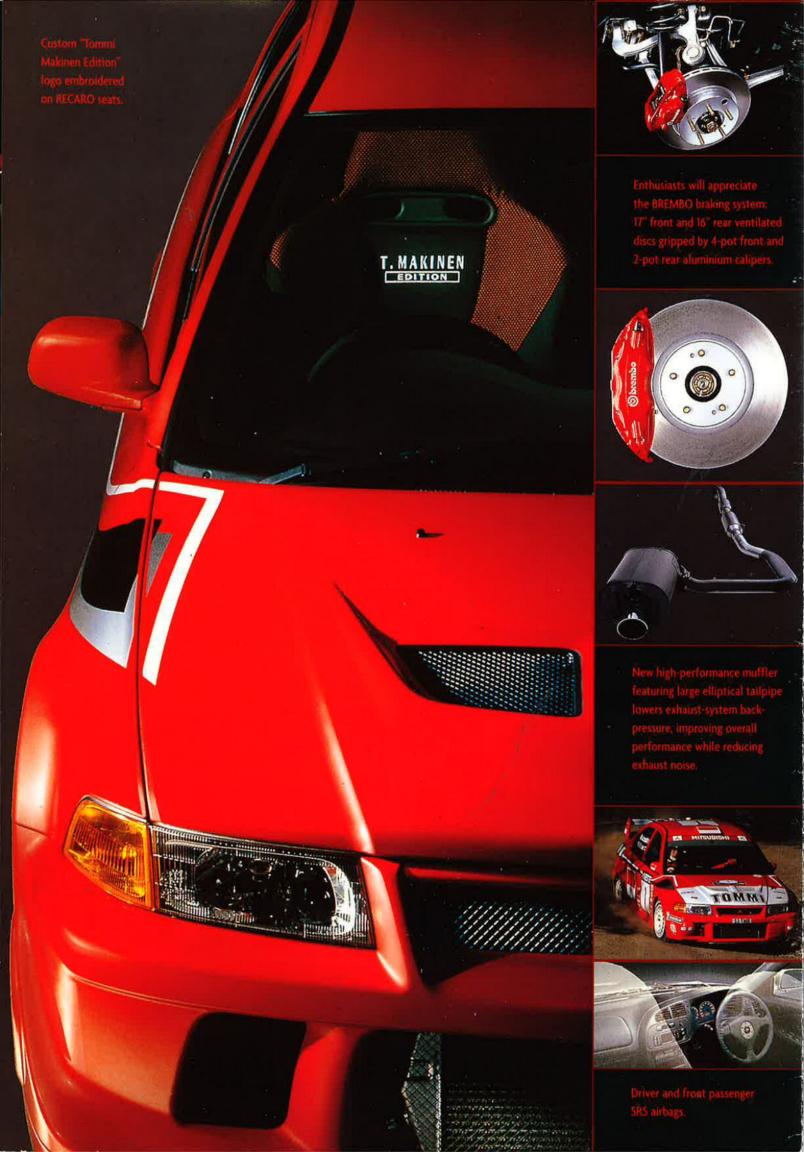

# RALLIART Exolution ready-to-race Tommi Makinen limited edition



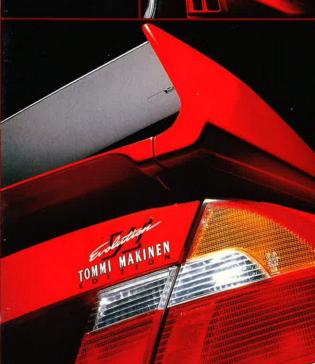

















## STANDARD EQUIPMENT

- Active Yaw Rear Differential Control Aluminium front and rear suspension arms Front and rear stabiliser bars Aluminium bonnet with air outlet Front and side airdams • Rear under-spoiler • Aluminium front over-fenders • Rear over-fenders • Wicker-type twin-wing rear spoiler with high-mount stop lamp
- Halogen headlamps Rear window defoggers Rear fog lamps Power steering MOMO leather-wrapped steering wheel Leather-wrapped gear shift knob
- Mph and km/h speedmeter Digital trip/odometer Front and rear ELR seatbelts Fire-retardant materials Specially tuned suspension BREMBO brakes
- 17x7.5JJ alloy wheels 225/45ZR17 tyres Colour-keyed electronically controlled door mirrors Driver and front passenger SRS airbags
- Air conditioner Power windows Central door locking system Rear centre armrest Cup holders Trunk room trim.

Note: Some of the equipment listed/shown in this brochure may differ in appearance and/or availability according to market. Please contact RALLIART Australia on 02 9749 7000 for more detailed information.

SPECIFICATIONS		
MODEL		RS-II
Model code	RHD	CP9ASNGFL/R
Drive system		Full-time 4WD
DIMENSIONS AND WEIG	GHT	
Overall length	mm	4,350
Overall width	mm	1,770
Overall height	mm	1,405
Wheelbase	mm	2,510
Track	Front mm	1,510
	Rear mm	1,505
Ground clearance	mm	140
Cabin length	mm	1,805
Cabin width	mm	1,430
Cabin height	mm	1,175
Kerb weight	. kg	1,280
Seating capacity	persons	5 ,
PERFORMANCE	persons	
Minimum turning radius	m	5.5
ENGINE		3.3
Туре		16 valve DOHC intercooled
7,700		with titanium/aluminium turbine
Displacement		1,997
Bore x stroke	CC	85.0 x 88.0
	mm	
Compression ratio		8.8:1
Max. output* (JIS)	kW(PS)/rpm	206 (280)/6,500
Max. torque* (JIS)	Nm (kg/m)/rpm	373 (38.0)/3,000
Fuel supply system		ECI-MULTI
		(Electronically controlled multi-point fuel injection)
Fuel type/capacity (litres) TRANSMISSION		Unleaded premium/50
Туре		5 speed manual
Gear ratio	lst	2.785
ocar ratio	2nd	1.950
	3rd	1.444
	4th	1.096
		0.825
	5th Reverse	3.416
		4.529
STEERING	Final	4.529
		Deal and division (names assisted)
Туре		Rack and pinion (power-assisted)
SUSPENSIONS		
Front		McPherson strut with inverted-type shock absorbers; stabiliser bar and aluminium lower arms
Rear		Multi-link with stabiliser bar; aluminium suspension arms
BRAKES		
Front		BREMBO braking system 17" ventilated discs
		(4-pot aluminium calipers)
Rear		BREMBO braking system 16" ventilated discs
		(2-pot aluminium calipers)
TYRES AND WHEELS		(2 pot atamman earpers)
Tyres (front and rear)		225/45ZR17
Wheels (front and rear)		17 x 7.5JJ alloy
Wheels (Horic and real)		17 x 7.3)) alloy

Note: These specifications are subject to change without notice. Some of the equipment shown in this brochure may vary according to market specifications. RALLIART Australia reserves the right to alter details of the specifications and equipment without notice. Please contact RALLIART Australia on 02 9749 7000 for detailed specifications and equipment available in your market. \*Maximum output and torque were measured while running on RON 100 fuel.



Scotia White W83 Satellite Silver (M) A69





Pyrenees Black (P) XO8

Passion Red\*\* R71

Note: (M): Metallic (P): Pearl metallic

\*\* Side stripes, decals are only available as an option with Passion Red body colour. White top rear wing is only available with Passion Red body colour.

# **DIMENSIONAL VIEWS**

