

TOYOTA CARGO VAN



The 1985 Toyota Cargo Van combines compact size with spacious interior capacity. It's nimble around town, and can handle your most diverse cargo needs.


With its roomy 149.8 cubic feet of cargo space, 1680 lb. payload capacity* and 4500 lb. Gross Vehicle Weight, the Cargo Van can take on the heaviest of duties.

The powerful, fuel-efficient** 2.0 liter engine with Electronic Fuel Injection delivers responsive performance. And the Cargo Van is designed to keep maintenance to a minimum. Platinum-tipped spark plugs are made for 60,000-mile life, and automatically adjusting hydraulic valve lifters help reduce wear.


Whatever your cargo carrying requirements, the 1985 Toyota Cargo Van will suit your needs.

*Including occupants, equipment and cargo, with 5-speed overdrive.
**See EPA mileage statement on Specifications chart. Shown with optional equipment. See Features chart for details.


ECONOMY AND CAPACITY

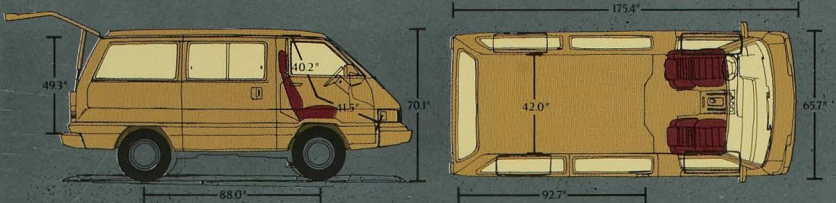


EASY LOADING AND LARGE CAPACITY

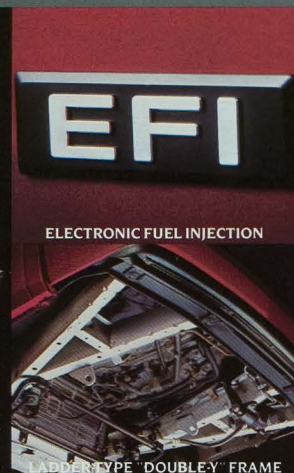

ELECTRONIC FUEL INJECTION

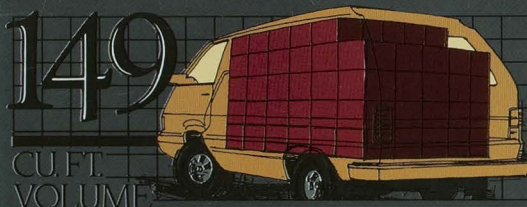


149
CU. FT.
VOLUME



5-SPEED OVERDRIVE TRANSMISSION

ADVANCED TECHNOLOGY
Cargo Van features include an electronically fuel-injected 2.0 liter engine, front and rear stabilizer bars and low-pressure gas-filled shocks, and power-assisted ventilated front disc/rear drum brakes. Unique "double-Y" frame adds sturdiness and stability.

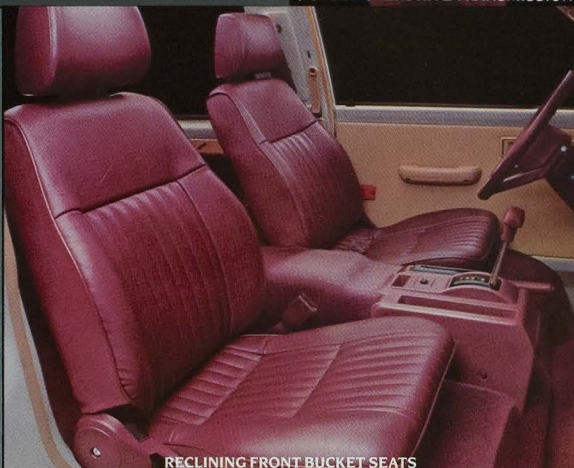

RECLINING FRONT BUCKET SEATS

ROOM AND CONVENIENCE

Cargo Van standard features include full instrumentation and comfortable reclining front bucket seats. Sliding side door and high-opening rear hatch allow easy cargo access.

FEATURES

S—Standard O—Optional	Cargo Van
MECHANICAL	
2.0 liter 4-cylinder engine with Electronic Fuel Injection	S
Fully transistorized ignition	S
5-speed overdrive transmission	S
4-speed automatic overdrive transmission with lock-up torque converter	O
Double wishbone upper torsion bar front suspension with gas-filled shock absorbers	S
4-link/coil spring rear suspension with gas-filled shock absorbers	S
Power-assisted brakes (ventilated front disc/rear drum with rear load-sensing proportioning valve)	S
Galvannealed steel in key body areas	S
EXTERIOR	
Styled steel wheels with steel-belted radial tires	S
Wheel trim rings	O
Urethane front and rear bumpers	S
Front mud guards	S
Dual outside mirrors	S
Rear window wiper/washer with fluid level indicator and electric rear window defogger	O
Sliding passenger-side door with child protector door lock	S
High overhead opening rear hatch	S
Sliding tinted side glass windows	S
INTERIOR	
Fuel and coolant temperature gauges, oil level warning light, and resettable tripmeter	S
Power steering and tilt steering wheel	O
Cruise Control—includes adjustable intermittent windshield wipers, footrest	O
Dual air conditioning with front/rear controls	O
Single air conditioning	O
Cooler/Ice Maker	O ¹
Steering column-mounted controls	S
Dual power-assisted Flo-thru ventilation with front/rear controls	S
Rear compartment heater with separate controls	S
Tinted glass	S
Locking fuel filler door	S
Analog quartz clock	S
Padded instrument panel	S
Reclining front vinyl bucket seats and center console with storage areas	S
Full carpeting including rear cargo area	S
Carpeted floor mats	O
AM/FM/MPX stereo receiver with 2 speakers and cassette	O
Garageable fold-down type radio antenna	S
Converter Package—includes power steering, power windows, centrally controlled power door locks, tilt steering wheel, Cruise Control, door courtesy lamps, electric rear window defogger, rear window wiper/washer, adjustable intermittent front wipers, footrest, bronze tinted glass and heavy-duty heater	O

¹ Available with dual air conditioning only.

SPECIFICATIONS

ENGINE TYPE	4-cylinder EFI		
DISPLACEMENT	2.0 liters (1998 cc)		
HORSEPOWER (SAE NET)	90 @ 4400 rpm		
TORQUE (SAE NET)	120 ft.-lbs @ 3000 rpm		
BODY/FRAME CONSTRUCTION	Unitized body		
SUSPENSION FRONT	Double wishbone with upper torsion bar, gas-filled shock absorbers and stabilizer bar		
SUSPENSION REAR	4-link with coil springs, gas-filled shock absorbers and stabilizer bar		
STEERING TYPE	Recirculating ball		
TURNING CIRCLE DIAMETER	302 ft.		
BRAKES	Power-assisted (ventilated front disc/rear drum with rear load-sensing proportioning valve)		
EXTERIOR DIMENSIONS (inches)			
Wheelbase	88.0	Overall height	70.1
Overall length	175.4	Tread width (front)	56.1
Overall width	65.7	Tread width (rear)	54.3
INTERIOR DIMENSIONS (inches)			
Head room	40.2	Cargo width (at floor)	42.0
Leg room	41.5	Cargo height	49.3
Shoulder room	56.1	Cargo length (at beltline)	92.7
CAPACITIES			
Cargo capacity (cu. ft.)	149.8		
Payload capacity (lbs.) ²	1680 (5-speed overdrive)		
	1660 (4-speed automatic)		
Fuel tank capacity (gallons)	15.9		
CURB WEIGHT (lbs.)	2820 (5-speed overdrive)/2840 (4-speed automatic)		
Gross vehicle weight rating (lbs.)	4500		
TIRES	Steel-belted radial blackwall	Size	P185/75R14
EXTERIOR COLORS (INTERIOR COLOR—Beige/Wine)			
White	Red	Silver Metallic (Clear Coat)	Beige Metallic (Clear Coat)
MILEAGE ESTIMATES*			
	5-speed Overdrive	4-speed Automatic Overdrive	
CITY MPG/HWY MPG	23/25	21/23	

² Including occupants, equipment and cargo.

* Remember, compare these mileage estimates to the EPA estimates of other vehicles. Actual mileage will vary depending upon the vehicle's options, driving conditions, driving habits and the vehicle's condition.

Specifications and equipment based on information available at time of printing and are subject to change without notice. Cover vehicle and others shown with optional equipment; see Features chart. For details on options, accessories and specifications in your area, contact your Toyota dealer. See 1985 Toyota Accessories brochure for additional Toyota-approved accessories.

OH
WHAT
A
FEELING

TOYOTA