


FORD D SERIES TRUCKS



SPECIFICATIONS & EQUIPMENT

D1000

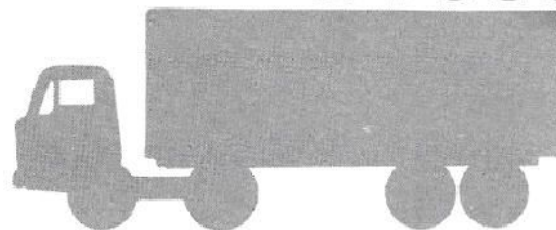

G.V.W. 26600 lb.

G.C.W. 53760 lb.

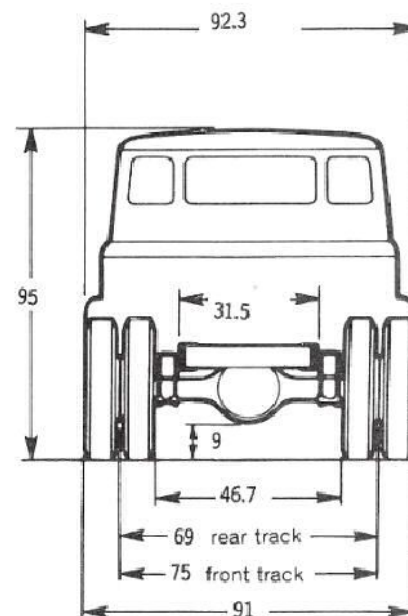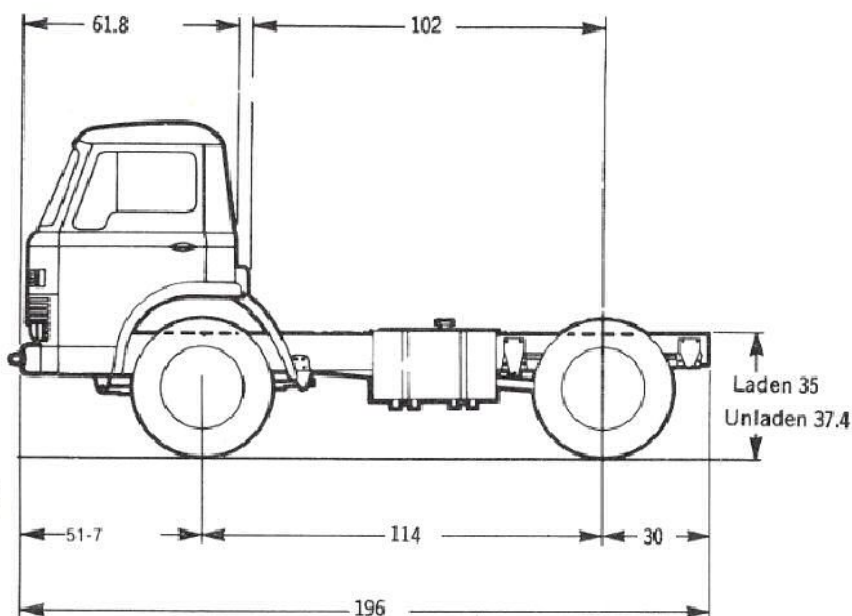

ALL DIMENSIONS IN INCHES

WHEELBASE	APPROXIMATE KERB WEIGHT	PAYLOAD, EQUIPMENT, ETC.
114"	FRONT 6230 lb. REAR 3899 lb. TOTAL 10,129 lb.	—

STANDARD EQUIPMENT

ENGINE: Cummins Vale 470-V8-185
 Displacement 470 cu. in.
 Compression Ratio 18 to 1
 Max. Gross H.P. @ rpm. 185 @ 3300
 Max. Net H.P. @ rpm. 176 @ 3300
 Max. Gross Torque lbs.-ft. @ rpm. 328 @ 1900
 Max. Net Torque lbs.-ft. @ rpm. 323 @ 1900
 Injection System Cummins P.T.
 Air Cleaner Dry Tri Phase
 Oil Filter Cummins by-pass

ALTERNATOR: CAV 30 AH-AC 5

AXLE, FRONT: Solid I-Beam
 Capacity 9500 lb.

AXLE, REAR: 2-speed Eaton 18802
 Capacity 22,500 lb.
 Ratio 7.17/9.75 to 1

BATTERY: 2 x 12 volt — 120 Amp.

BRAKES, SERVICE: Dual Line Full Air
 Total Lining Area 666 sq. in.
 Booster Dual Air Clayton Dewandre

BRAKES, PARKING:
 Power assistance mechanical linkage to Rear Wheels.
 Total Lining Area 363.6 sq. in.

CAB: Custom Tilt Cab

CLUTCH: Diameter 12" Twin Plate
 Frictional Area 275 sq. in.

COOLING SYSTEM: Capacity — 54.25 imp. pts.
Fan 5 blade — 20" dia.

FRAME: Sect. Modulus 14.18

FUEL TANK: 50 Imp. Gallons

SHOCK ABSORBERS:
Front Double Action Telescopic

SPRINGS, FRONT:
Capacity @ Pad 4500 lb.
Size — No. of Leaves 57.0" x 3.0" — 9

SPRINGS, REAR:
Capacity @ Pad 8000 lb.
Size — No. of Leaves 46"/56" x 3.5" — 14
Auxiliary — Capacity @ Pad 1810 lb.
Size — No. of Leaves 35.5" x 3.5" — 4

STEERING: Bishop 350Q Worm & Peg
Ratio 28 to 1
Steering Wheel Diam. 19.81"

TRANSMISSION:
Turner T 5c — 4007 5-speed

TYRES:
Front 9.00 x 20 — 12 ply
Dual Rear 9.00 x 20 — 12 ply

WHEELS: Disc
No. and Size 7 — 20" Dia.
Rim Size B6.5
No. of Studs 10
Bolt Circle 13.88

ADDITIONAL STANDARD EQUIPMENT: CUSTOM CAB:

Windshield Wipers Dual Air Operated
Outside Rear View Mirrors Left and Right
Locking Door Handles, Dome Light
Interior Sun Visors Padded
Heater & Demister, Air Pressure Gauges (3)
Instruments: Ammeter & Oil Pressure Gauges, Speedometer, Mileage Recorder, Fuel and Water Temperature Gauges, High Beam, Alternator, Ignition and Oil Pressure Warning Lights, Brake Reservoir Gauge and Audible Warning Buzzer, Tachometer, Flashing Direction Indicators, Dual Electric Horns, Toughened Glass Windshield Zoned Area, Lockable Glove compartment, Door Stowage Compartment, Lapstyle Seat Belts (mandatory), Adjustable Driver's Seat, Printed Circuit Instrument Cluster.

Radiator Blind
Trailer Brake Connections
Windshield Washers.

OPTIONAL EQUIPMENT

FUEL TANK: Extra 50 gals.

TYRES: Spare Tyre & Tube
9.00 x 20 — 12 ply