


FORD D SERIES TRUCKS

SPECIFICATIONS & EQUIPMENT

D600



G.V.W. 21500 lb.
G.C.W. Petrol 32000 lb.
Diesel 34000 lb.

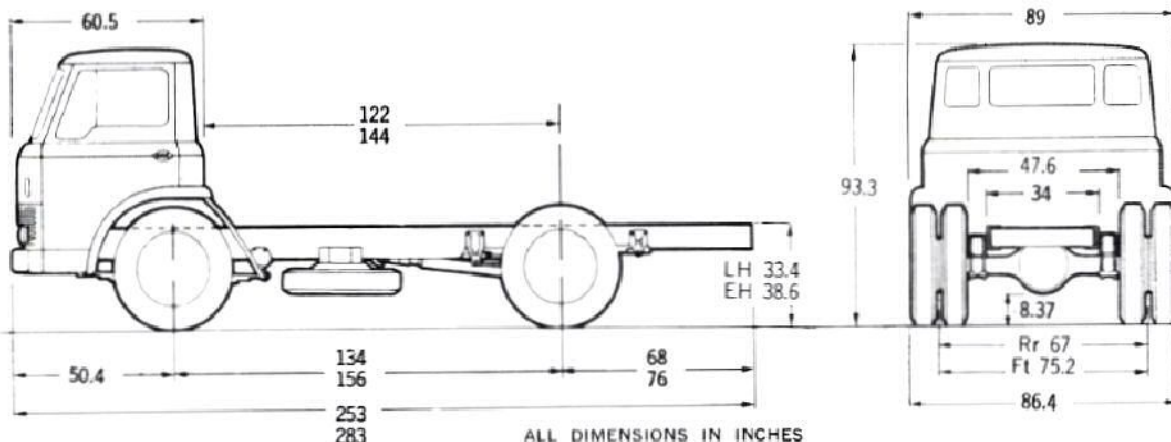

WHEELBASE	APPROXIMATE KERB WEIGHT			PAYLOAD, EQUIPMENT, ETC.
134" PETROL 156"	FRONT 3976 lb.	REAR 2576 lb.	TOTAL 6552 lb.	14,948 lb.
	FRONT 3997 lb.	REAR 2632 lb.	TOTAL 6629 lb.	14,871 lb.
156" DIESEL	FRONT 4487 lb.	REAR 2653 lb.	TOTAL 7141 lb.	14,359 lb.

STANDARD EQUIPMENT

ENGINE: 6 Cyl. Petrol O.H.V. 300 CID
Displacement 300 cu. in.
Compression Ratio 8.00 to 1
Max. Gross H.P. @ rpm. 170 @ 3600
Max. Net H.P. @ rpm. 150 @ 3600
Max. Gross Torque lbs.-ft. @ rpm. 283 @ 1400-2400
Max. Net Torque lbs.-ft. @ rpm. 272 @ 1400-2100
Carburettor Single-Venturi
Air Cleaner Fram paper element
Oil Filter Full Flow, Replaceable Element

ALTERNATOR: (Petrol) 35 amp. Email Prestolite
(Diesel) Lucas 43 amp.

AXLE, FRONT: Solid I-Beam
Capacity 7500 lb.

AXLE, REAR: 2-speed Eaton 16802
Capacity 19,500 lbs.
Ratio 6.14/8.54 to 1

BATTERY: (Petrol) 12 volt — 57 Amp., 9 plate
(Diesel) 12 volt — 125 Amp.

BRAKES, SERVICE: Girling Hydraulic
Total Lining Area 479 sq. in.
Vacuum Booster (Petrol) Hydovac 9.5" dia. Servo
(Diesel) "Airpak" 4.0" dia. Servo

BRAKES, PARKING:
Mechanical by rod & cable to rear wheels, multi-pull
Total Lining Area 270 sq. in.

CAB: Tilt Cab

CLUTCH: Diameter 12" dia.
Frictional Area 137.8 sq. in.

COOLING SYSTEM: (Petrol) Capacity — 20.5 qts.
Fan (Petrol) 4 blade — 19.5" dia.
(Diesel) Capacity — 22.4 qts.
Fan (Diesel) 8 blade — 19.5" dia.

FRAME: Sect. Modulus 8.43

FUEL TANK: 20 Imp. Gallons

SHOCK ABSORBERS:
Front Double Action Telescopic

SPRINGS, FRONT:
Capacity @ Pad 3350 lb.
Size — No. of Leaves 57" x 3.0" — 7

SPRINGS, REAR:
Capacity 5700 lb.
Size — No. of Leaves 57" x 3.0" — 12
Auxiliary — Capacity @ Pad 2250 lb.
Size — No. of Leaves 35.50" x 3.0" — 4

STEERING: Bishop 300 Q Worm & Peg
Ratio 24 to 1
Steering Wheel Diam. 19.81"

TRANSMISSION: (Petrol) Turner 5-speed
(Diesel) 4-speed

TYRES:
Front 8.25 x 20 — 10 ply
Dual Rear 8.25 x 20 — 12 ply

WHEELS: Disc
No. and Size 7 — 20.0" dia.
Rim Size B6.0
No. of Studs 8
Bolt Circle 10.83

ADDITIONAL STANDARD EQUIPMENT:

Dual Electric Windshield Wipers
Locking Door Handles, Dome Light
Interior Sun Visors
Instruments: Speedometer, Mileage Recorder, Oil Pressure,
Alternator, Direction Indicator & Main Beam Warning
Lights, Fuel & Temperature Gauges, Brake Reservoirs:
Petrol — Warning Light
Diesel — Gauge and Warning Buzzer
Two Rear Vision Mirrors (Std. Type)
Windshield Washers

OPTIONAL EQUIPMENT

ENGINE: 6 Cyl. Diesel, Inclined
Displacement 330 cu. in.
Compression Ratio 16 to 1
Max. Gross H.P. @ rpm. 115 @ 2800
Max. Net H.P. @ rpm. 102.5 @ 2800
Max. Gross Torque lbs.-ft. @ rpm. 251.5 @ 1500
Max. Net Torque lbs.-ft. @ rpm. 239 @ 1400-1600
Injection Minimec Type
Air Cleaner Fram paper element
Oil Filter Full Flow, Replaceable Element

ENGINE: 6 Cyl. Petrol only
Compression Ratio 7.5 to 1

AIR CLEANER: 8" Donaldson Cyclopak

CAB: Chassis Cowl

TACHOMETER: (Diesel only) Mechanical Type

TYRES: Spare Tyre & Tube
8.25 x 20 — 12 ply