



FORD F SERIES TRUCKS

SPECIFICATIONS & EQUIPMENT

F500

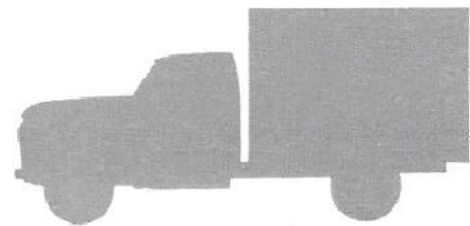

G.V.W. 12,600 lbs.
13,500 lbs.
G.C.W. 20,000 lbs.

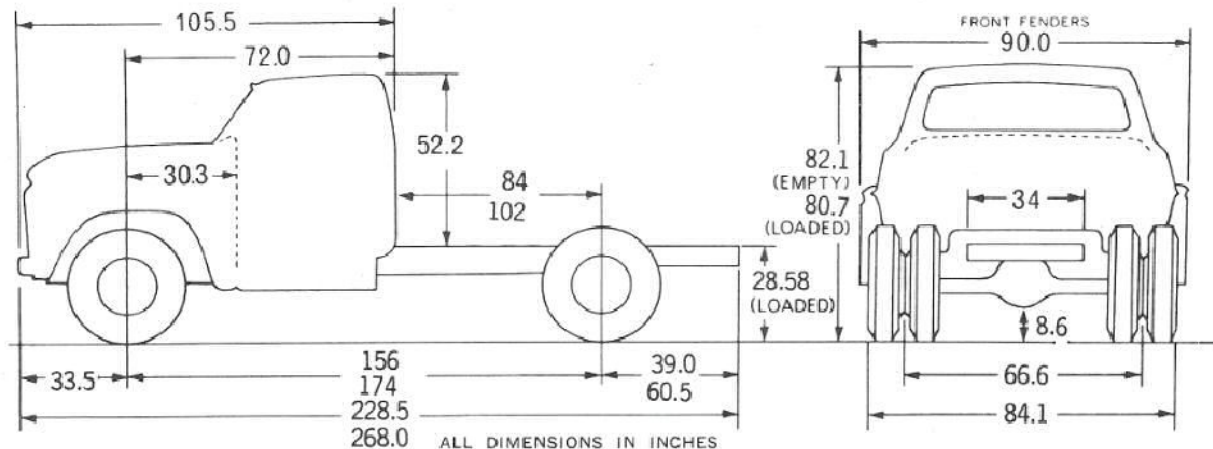

APPROXIMATE KERB WEIGHT				
	156" WHEELBASE		174" WHEELBASE	
	12,600 lbs.	13,500 lbs.	12,600 lbs.	13,500 lbs.
Front	2986 lb.	2996 lb.	2996 lb.	2968 lb.
Rear	2080 lb.	2100 lb.	2085 lb.	2079 lb.
Total	5066 lb.	5096 lb.	5081 lb.	5047 lb.
Approx. Weight for Payload and equipment.	7534 lb.	8404 lb.	7519 lb.	8453 lb.

STANDARD EQUIPMENT

ENGINE: 6 Cyl. Petrol O.H.V. 240 CID
 Displacement 240 cu. in.
 Compression Ratio 8.75 to 1
 Max. Gross Horsepower @ rpm. 150 @ 4000
 Max. Net Horsepower @ rpm. 129 @ 4000
 Max. Gross Torque lbs.-ft. @ rpm. 234 @ 2200
 Max. Net Torque lbs.-ft. @ rpm. 218 @ 2000
 Carburettor Single-Venturi
 Air Cleaner Oil Bath 1 qt.
 Oil Filter Disposable Type (1 qt. cap)

ALTERNATOR: Email 35 amp. 12 volt

AXLE, FRONT: Solid I-Beam
 Capacity 5000 lb.

AXLE, REAR: Hypoid, Fully Floating, Rockwell C-100
 Capacity 11,000 lb.
 Ratio Single Speed — 6.2 to 1

BATTERY: 12 volt — 55 amp. — 66 plate
 Negative Terminal Grounded

BRAKES, SERVICE: Self Adjusting Hydraulic
 Total Lining Area 388.5 sq. in.
 Vacuum Booster Bendix — 12½" dia.
 Vacuum Reservoir 1000 cu. in.
 With Warning Light

BRAKES, PARKING: Bendix Drum on Transmission
 Total Lining Area 42.28 sq. in.

CAB: Standard Conventional

CLUTCH: Diameter 11" dia.
 Frictional Area 123.7 sq. in.

COOLING SYSTEM:

Capacity 15.8 imp. qts.
 Fan 4 blade — 19.5" dia.

FRAME: Section Modulus 9.45

FUEL TANK: 16.25 gallon

SPRINGS, FRONT:

Capacity @ Pad 1750 lb.
 Size — No. of Leaves 48" x 2.5" — 7

SPRINGS, REAR: 12-10 Main, 2 Radius Leaf

Main — Capacity @ Pad 4500 lb.
 Size — No. of Leaves 46-59" x 3" — 12

STEERING: Worm & Roller

Ratio — Dia. of Wheel 27.6 to 1 — 20"

TRANSMISSION: New Process 435 — 4-speed

TYRES: Tyre & Tube

12,600 lbs.: Front 6.50 x 20 — 8 ply
 Dual Rear 6.50 x 20 — 8 ply

13,500 lbs.: Front 7.00 x 20 — 8 ply
 Dual Rear 7.00 x 20 — 8 ply

WHEELS: 2 piece Disc

No. and Size 7 — 20" dia.

Rim Size 5.0"

No. of Studs 6

ADDITIONAL STANDARD EQUIPMENT:

Dual Electric 2-Speed Windshield Wipers
 Outside Rear View Mirror, Left and Right Hand
 Locking Door Handles, Interior Cab Light
 Instruments: Speedometer, Mileage Recorder, Oil Pressure
 and Alternator Gauges, Main Beam and Vacuum
 Warning Lights, Fuel and Temperature Gauges
 Interior Sun Visors
 Lap Type Seat Belt (mandatory)
 Safety Door Locks and Hinges
 Glare reduced Windshield Wipers and Instruments
 Electric Windshield Washers.

OPTIONAL EQUIPMENT

ENGINE:

Compression Ratio 7.0 to 1

AIR CLEANER: 8" Cyclopak

SAFETY:

Passenger Lap Type Seat Belt

TYRES: Spare if required

6.50 x 20 — 8 ply

7.00 x 20 — 10 ply

TYRES: 13,500 lbs.

Front 7.00 x 20 — 10 ply