


FORD F SERIES TRUCKS


SPECIFICATIONS & EQUIPMENT

F600

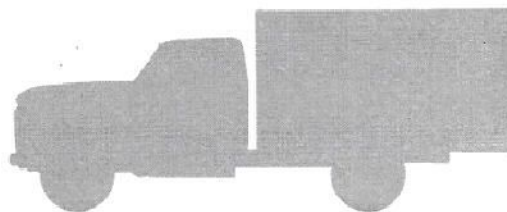

G.V.W. 21000 lb.

G.C.W. 34000 lb.

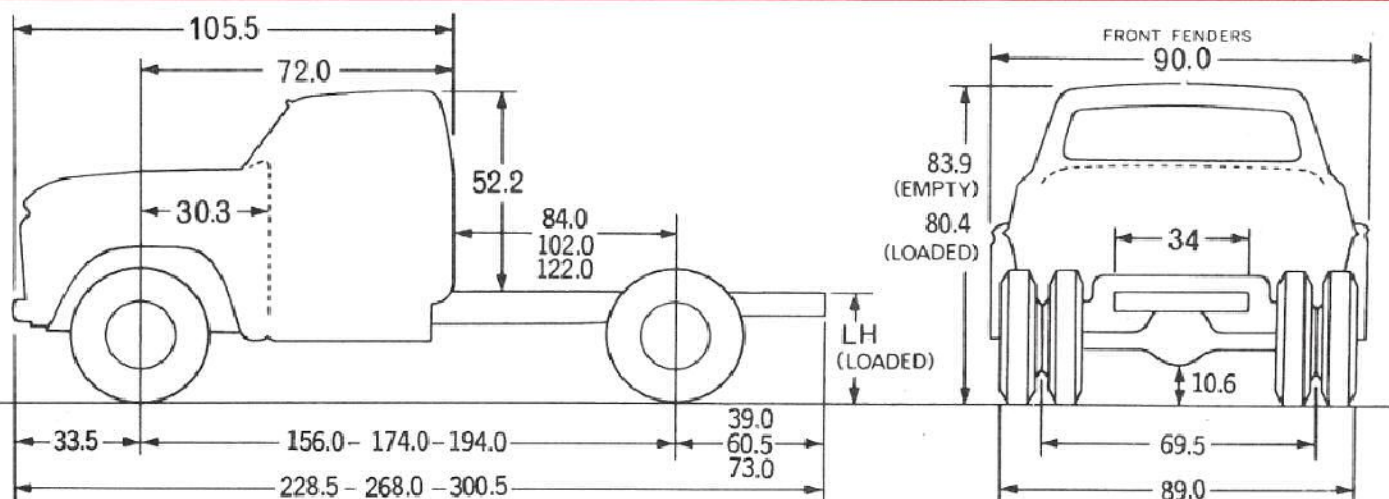

ALL DIMENSIONS IN INCHES

WHEELBASE	APPROXIMATE KERB WEIGHT			PAYLOAD, EQUIPMENT, ETC.
	FRONT	REAR	TOTAL	
156"	3255 lb.	2639 lb.	5894 lb.	15,106 lb.
174"	3297 lb.	2681 lb.	5978 lb.	15,022 lb.
194"	3290 lb.	2702 lb.	5992 lb.	15,008 lb.

STANDARD EQUIPMENT

ENGINE: 6 Cyl. Petrol O.H.V. 300 CID

Displacement 300 cu. in.
 Compression Ratio 8.0 to 1
 Max. Gross Horsepower @ rpm. 170 @ 3600
 Max. Net Horsepower @ rpm. 150 @ 3600
 Max. Gross Torque lbs.-ft. @ rpm. 283 @ 1400-2400
 Max. Net Torque lbs.-ft. @ rpm. 272 @ 1400-2100
 Carburettor Single-Venturi
 Air Cleaner (Oil Bath) 1 pint
 Oil Filter (replaceable element) Full Flow

ALTERNATOR: Email 35 amp. 12 volt

AXLE, FRONT: Solid I-Beam
 Capacity 6000 lb.

AXLE, REAR:
 Two Speed EATON (13802)
 Capacity 15,000 lb.
 Ratio 6.33/8.81 to 1

BATTERY: 12 volt — 55 amp. — 66 plate
 Negative Terminal Grounded

BRAKES, SERVICE: Hydraulic
 Total Lining Area 388.51 sq. in.
 Vacuum Booster Bendix — 12½" dia.
 Vacuum Reservoir 1000 cu. in.

BRAKES, PARKING: Bendix Drum on Transmission
 Total Lining Area 42.28 sq. in.

CAB: Standard Conventional

CLUTCH: Diameter 12" dia.
 Frictional Area 149.2 sq. in.

COOLING SYSTEM:
 Capacity 15.8 imp. qts.
 Fan 4 blade — 19.5" dia.

FRAME: Section Modulus 11.84

FUEL TANK: 16.25 imp. gallons

SPRINGS, FRONT:

Main Capacity @ Pad 3000 lb.
Size — No. of Leaves 48" x 2.5" — 9

SPRINGS, REAR:

Main — Capacity @ Pad 6700 lb.
Size — No. of Leaves 46-59" x 3.0" — 12
Auxiliary — Capacity @ Pad 2250 lb.
Size — No. of Leaves 35.5" x 3.0" — 4

STEERING: Worm & Roller
Ratio — Dia. of Wheel 27.6 to 1 — 20"

TRANSMISSION: New Process 435 — 4-speed

TYRES: Tyre & Tube
Size: Front 8.25 x 20 — 10 ply
Dual Rear 8.25 x 20 — 12 ply

WHEELS: 3 piece Disc
No. and Size 7 — 20"
Rim Size 6" Disc
No. of Studs 6

ADDITIONAL STANDARD EQUIPMENT:

Dual Electric 2-Speed Windshield Wipers
Outside Rear View Mirror, Left and Right Hand
Locking Door Handles, Interior Cab Light
Instruments: Speedometer, Mileage Recorder, Oil Pressure,
and Alternator Charge Gauges, Main Beam and Vacuum
Warning Lights, Fuel & Temperature Gauges.
Interior Sun Visors
Lap Type Seat Belt (mandatory)
Safety Door Locks and Hinges
Glare reduced Windshield Wipers and Instruments
Electric Windshield Washers.

OPTIONAL EQUIPMENT

ENGINE:

Compression Ratio 7.5 to 1

AIR CLEANER: 8" Cyclopak

TYRES: Spare Tyre and Tube
8.25 x 20 — 12 ply

SAFETY:

Passenger Lap Type Seat Belts.