



FORD F SERIES TRUCKS

SPECIFICATIONS & EQUIPMENT

F700

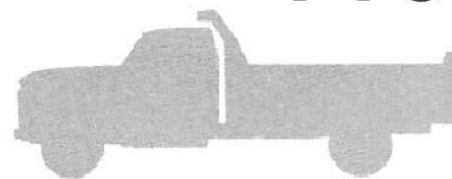

G.V.W. 23,000 lb.
G.C.W. 40,000 lb. (6 cyl.)
G.C.W. 42,000 lb. (V8)

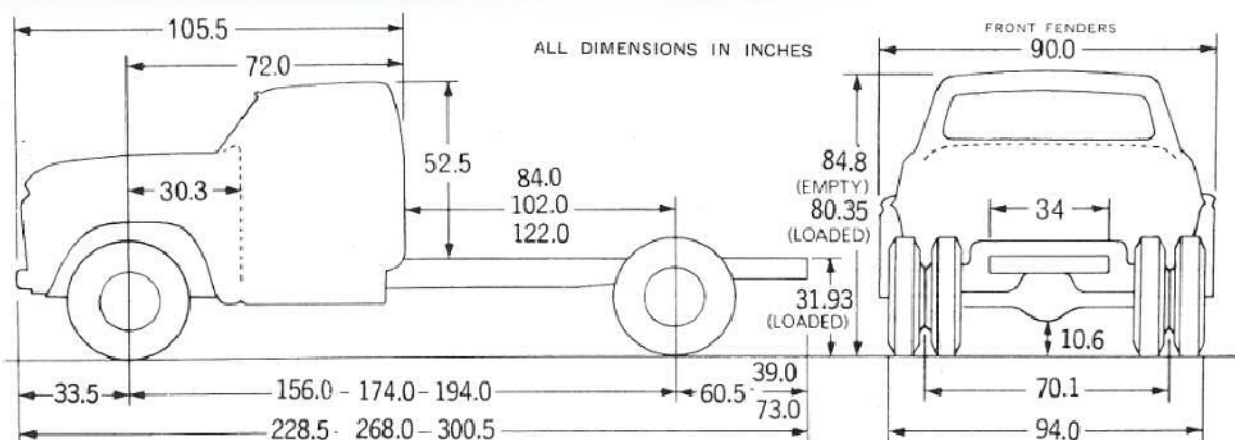

WHEELBASE	APPROXIMATE KERB WEIGHT			PAYLOAD, EQUIPMENT, ETC.
156" 6 Cyl.	FRONT 3360 lb.	REAR 2912 lb.	TOTAL 6272 lb.	16,728 lb.
174" 6 Cyl.	3388 lb.	2940 lb.	6328 lb.	16,672 lb.
194" 6 Cyl.	3486 lb.	3178 lb.	6664 lb.	16,336 lb.

STANDARD EQUIPMENT

ENGINE: 6 Cyl. Petrol O.H.V. 300 CID
 Displacement 300 cu. in.
 Compression Ratio 8.0 to 1
 Max. Gross Horsepower @ rpm. 170 @ 3600
 Max. Net Horsepower @ rpm. 150 @ 3600
 Max. Gross Torque lbs.-ft. @ rpm. 283 @ 1400-2400
 Max. Net Torque lbs.-ft. @ rpm. 272 @ 1400-2100
 Carburettor Single-Venturi Downdraft
 Air Cleaner (Oil Bath) 1 qt.
 Oil Filter (replaceable element) Full-Flow

ALTERNATOR: Email 35 amp. 12 volt

AXLE, FRONT: Solid I-Beam
 Capacity 6000 lb.

AXLE, REAR: Eaton — Two Speed (16802)
 Capacity 17,000 lb.
 Ratio 6.50/9.04 to 1

BATTERY: 12 volt — 55 amp. — 66 plate
 Negative Terminal Grounded

BRAKES, SERVICE: Hydraulic
 Total Lining Area 459.46 sq. in.
 Vacuum Booster Bendix 12 1/2" dia.
 Vacuum Reservoir 1000 cu. in.

BRAKES, PARKING: Bendix Drum on Transmission
 Total Lining Area 42.28 sq. in.

CAB: Standard Conventional

CLUTCH: Diameter 12" dia.
 Frictional Area 149.2 sq. in.

COOLING SYSTEM:
 Capacity 15.8 qts.
 Fan 4 blade — 19.5" dia.

FRAME: Section Modulus 19.2

FUEL TANK: 16.25 imp. gallons

SPRINGS, FRONT:

Capacity @ Pad 3000 lb.
 Size — No. of Leaves 48" x 2.5" — 9

SPRINGS, REAR:

Main — Capacity @ Pad 8100 lb.
 Size — No. of Leaves 46-59" x 3.0" — 12
 Auxiliary — Capacity @ Pad 2250 lb.
 Size — No. of Leaves 35.5" x 3.0" — 4

STEERING: Worm & Roller
 Ratio — Dia. of Wheel 27.6 to 1 — 20"

TRANSMISSION: 5 Speed

TYRES: Tyre & Tube
 Size: Front 8.25 x 20 — 10 ply
 Dual Rear 9.00 x 20 — 12 ply

WHEELS: Cast Iron Spoke
 No. and Size 7 — 20"
 Rim Size 6.5"
 No. of Studs 5

ADDITIONAL STANDARD EQUIPMENT:

Dual Electric 2-Speed Windshield Wipers
 Outside Rear View Mirror, Left and Right Hand
 Locking Door Handles, Interior Cab Light
 Instruments: Speedometer, Mileage Recorder, Oil Pressure,
 and Alternator Gauges, Main Beam and Vacuum
 Warning Lights, Fuel & Temperature Gauges
 Interior Sun Visors
 Lap Type Seat Belt (mandatory)
 Safety Door Locks and Hinges
 Glare reduced Windshield Wipers and Instruments
 Electric Windshield Washers.

OPTIONAL EQUIPMENT

ENGINE: 8 Cyl. Petrol O.H.V. 330 CID
 Compression Ratio 7.4 to 1
 Max. Gross BHP 190 @ 4000
 Net BHP 164 @ 3800
 Max. Torque 306 lbs.-ft. @ 2000 rpm.
 Net Torque 286 lbs.-ft. @ 2000 rpm.

AIR CLEANER: 10" Cyclopak — V8
 8" Cyclopak — 6 cyl.

CLUTCH: V8 — 13"

SAFETY:
 Passenger Lap Type Seat Belts

TYRES: Spare if required
 9.00 x 20 — 12 ply
 9.00 x 20 — 10 ply

WHEELBASE	APPROXIMATE KERB WEIGHT			PAYLOAD, EQUIPMENT, ETC.
	FRONT	REAR	TOTAL	
156" V8 Cyl.	3570 lb.	2856 lb.	6426 lb.	16,574 lb.
174" V8 Cyl.	3647 lb.	2968 lb.	6615 lb.	16,385 lb.
194" V8 Cyl.	3752 lb.	3087 lb.	6839 lb.	16,161 lb.