


FORD F SERIES TRUCKS


SPECIFICATIONS & EQUIPMENT

F750

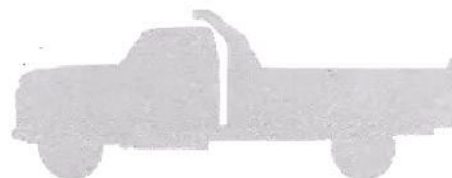

G.V.W. 24500 lb.

G.C.W. 44000 lb.

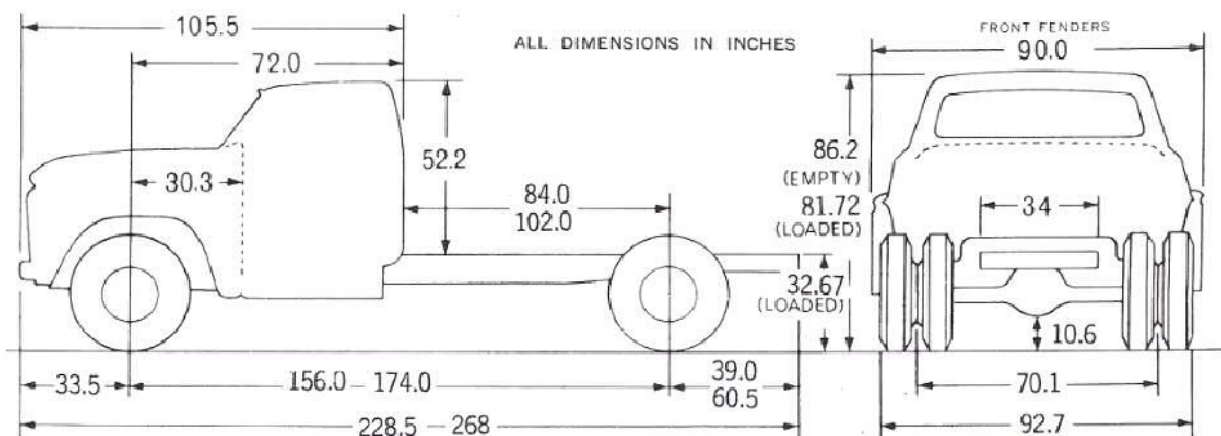

WHEELBASE	APPROXIMATE KERB WEIGHT			PAYLOAD, EQUIPMENT, ETC.
156"	FRONT 3724 lb.	REAR 3136 lb.	TOTAL 6860 lb.	17,640 lb.
174"	3752 lb.	3178 lb.	6930 lb.	17,570 lb.

STANDARD EQUIPMENT

ENGINE: H.D. 8 Cyl. Petrol O.H.V. 330 CID
 Displacement 330 cu. in.
 Compression Ratio 7.4 to 1
 Max. Gross Horsepower @ rpm. 190 @ 4000
 Max. Net Horsepower @ rpm. 164 @ 3800
 Max. Gross Torque lbs.-ft. @ rpm. 306 @ 2000
 Max. Net Torque lbs.-ft. @ rpm. 286 @ 2000
 Carburettor 2 Barrel Holley Downdraft
 Air Cleaner (Oil Bath) 1 qt.
 Oil Filter (replaceable element) Full-Flow

ALTERNATOR: 45 amp. 12 volt Autolite

AXLE, FRONT: Solid I-Beam
 Capacity 7000 lb.

AXLE, REAR: Eaton — Two Speed (17,800)
 Capacity 18,500 lb.
 Ratio 7.17/9.77 to 1

BATTERY: 12 volt — 55 amp. — 66 plate
 Negative Terminal Grounded

BRAKES, SERVICE: Hydraulic
 Total Lining Area 578.60 sq. in.
 Vacuum Booster Bendix 12½" dia.
 Vacuum Reservoir 1000 cu. in.

BRAKES, PARKING: Bendix Drum on Transmission
 Total Lining Area 63.42 sq. in.

CAB: Standard Conventional

CLUTCH: Diameter 13" dia.
 Frictional Area 183.4 sq. in.

COOLING SYSTEM:
 Capacity 21 qts.
 Fan 5 blade — 20" dia.

FRAME: Section Modulus 19.2

FUEL TANK: 16½ imp. gallons

SHOCK ABSORBERS: Direct Double Acting Telescopic

SPRINGS, FRONT:
 Capacity @ Pad 3300 lb.
 Size — No. of Leaves 48" x 2.5" — 10

SPRINGS, REAR:
 Main — Capacity @ Pad 8100 lb.
 Size — No. of Leaves 46-59" x 3.0" — 10
 Auxiliary — Capacity @ Pad 2250 lb.
 Size — No. of Leaves 35.5" x 3.0" — 4

STEERING: Worm & Roller
Ratio — Dia. of Wheel 27.6 to 1 — 20"

TRANSMISSION: 5 Speed

TYRES: Tyre & Tube
Size: Front 9.00 x 20 — 10 ply
Dual Rear 9.00 x 20 — 12 ply

WHEELS: Cast Iron Spoke
No. & Size 7 — 20"
Rim Size 6.5"
No. of Studs 5

ADDITIONAL STANDARD EQUIPMENT:

Dual Electric 2-Speed Windshield Wipers
Outside Rear View Mirror, Left and Right Hand
Locking Door Handles, Interior Cab Light
Instruments: Speedometer, Mileage Recorder, Oil Pressure,
and Alternator Gauges, Main Beam and Vacuum
Warning Lights, Fuel & Temperature Gauges
Interior Sun Visor, Both Sides
Seat Belt, Driver's — Lap Type (mandatory)
Electric Windshield Washers
Glare reduced Windshield Wipers and Instruments.

OPTIONAL EQUIPMENT

AIR CLEANER: 10" Cyclopak

TYRES: Spare if required
9.00 x 20 — 12 ply

SAFETY:

Passenger Lap Type Seat Belts