


FORD F SERIES TRUCKS


SPECIFICATIONS & EQUIPMENT

F800

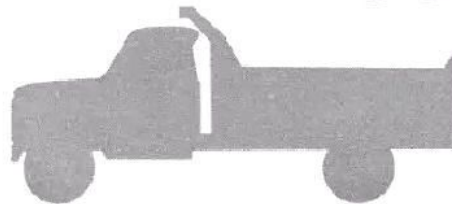

G.V.W. 25500 lb.

G.C.W. 51000 lb.

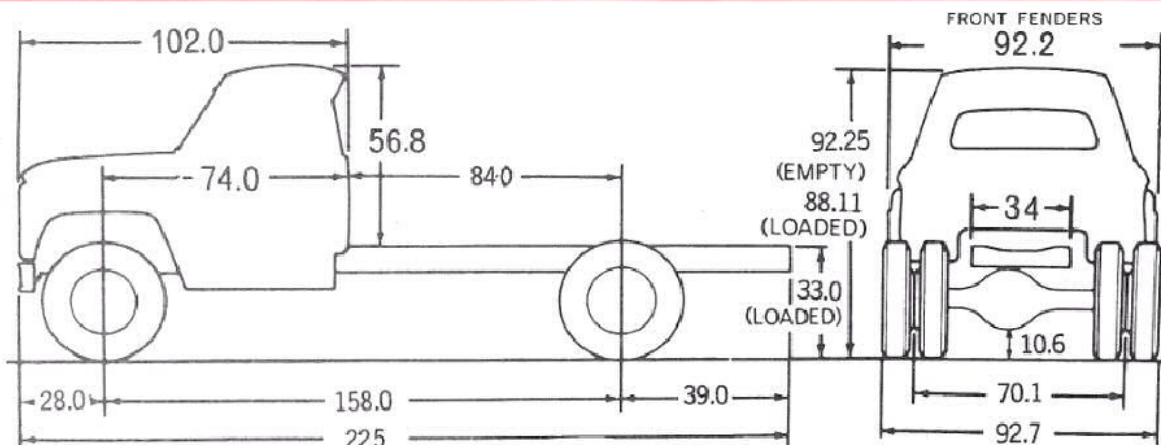

ALL DIMENSIONS IN INCHES

WHEELBASE	APPROXIMATE KERB WEIGHT			PAYLOAD, EQUIPMENT, ETC.
158"	FRONT 4095 lb.	REAR 3507 lb.	TOTAL 7602 lb.	17,898 lb.

STANDARD EQUIPMENT

ENGINE: H.D. 8 Cyl. V8 Petrol O.H.V. 361 CID
 Displacement 361 cu. in.
 Compression Ratio 7.4 to 1
 Max. Gross Horsepower @ rpm. 210 @ 4000
 Max. Net Horsepower @ rpm. 182 @ 3800
 Max. Gross Torque lbs.-ft. @ rpm. 345 @ 2000
 Max. Net Torque lbs.-ft. @ rpm. 322 @ 2000
 Carburettor Two Venturi Downdraft
 Air Cleaner (Oil Bath) 1 qt.
 Oil Filter (replaceable element) Full-Flow

ALTERNATOR: Ford 45 amp. 12 volt

AXLE, FRONT: Solid I-Beam
 Capacity 7000 lb.

AXLE, REAR: Eaton — Two Speed (17,800)
 Capacity 18,500 lb.
 Ratio 7.17/9.77 to 1

BATTERY: 12 volt — 70 amp. — 66 plate
 Negative Terminal Grounded

BRAKES, SERVICE: Hydraulic
 Total Lining Area 641.9 sq. in.
 Vacuum Booster (with warning light) Bendix 12 1/2" dia.
 Vacuum Reservoir 1250 cu. in.

BRAKES, PARKING: Bendix Drum on Transmission
 Total Lining Area 63.42 sq. in.

CAB: Standard Conventional

CLUTCH: Diameter 13" dia.
 Frictional Area 183.4 sq. in.

COOLING SYSTEM:
 Capacity 21.25 imp. qts.
 Fan 5 blade — 20" dia.

FRAME: Section Modulus 19.19

FUEL TANK: 16.25 imp. gallons

SPRINGS, FRONT:
 Capacity @ Pad 4000 lb.
 Size — No. of Leaves 54" x 4" — 7

SPRINGS, REAR:

Main — Capacity @ Pad	9300 lb.
Size — No. of Leaves	46-59" x 3.0" — 13
	11 Main 2 Radius
Auxiliary — Capacity @ Pad	2250 lb.
Size — No. of Leaves	35.5" x 3.0" — 4

STEERING:

Ratio — Dia. of Wheel 32.5 to 1 — 20"

TRANSMISSION:

5 Speed

TYRES:

Tyre & Tube										
Size: Front	9.00	x	20	—	12	ply				
Dual Rear	9.00	x	20	—	12	ply				

WHEELS:

EELS:		Cast Iron Spoke
No. & Size	7 — 20"	
Rim Size	7"	
No. of Studs	5	

ADDITIONAL STANDARD EQUIPMENT:

Dual Electric 2-Speed Windshield Wipers
Outside Rear View Mirror, Left and Right Hand
Locking Door Handles, Interior Cab Light
Instruments: Speedometer, Mileage Recorder, Oil Pressure,
and Alternator Gauges, Main Beam and Vacuum
Warning Lights, Fuel & Temperature Gauges
Interior Sun Visor, Both Sides
Lap Type Seat Belt (mandatory)
Electric Windshield Washers

OPTIONAL EQUIPMENT

AIR CLEANER:

10" Cyclopak

TYRES:

Spare if required
9.00 x 20 — 12 ply

SAFETY:

Passenger Lap Type Seat Belts