

FORD K SERIES TRUCKS


SPECIFICATIONS & EQUIPMENT

K600



G.V.W. 21000 lb.

G.C.W. 34000 lb.

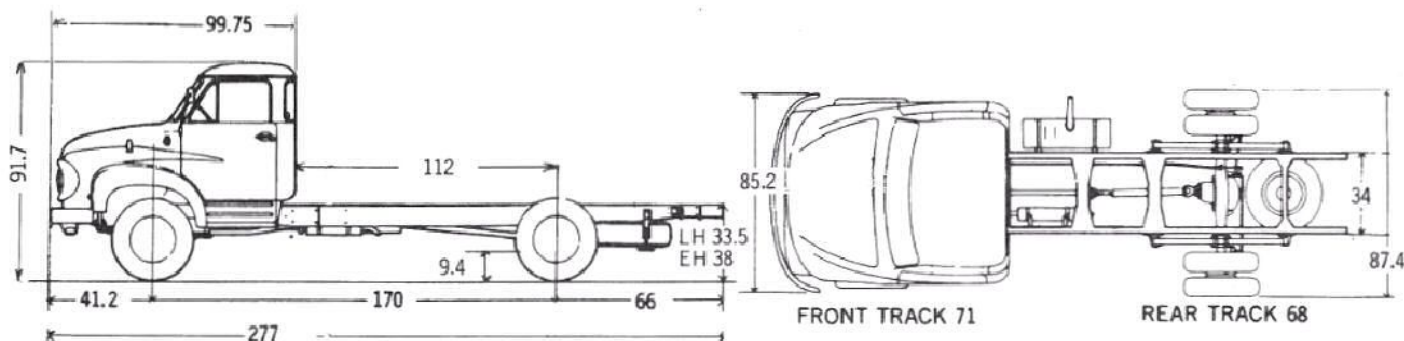

ALL DIMENSIONS IN INCHES

WHEELBASE	APPROXIMATE KERB WEIGHT			PAYLOAD, EQUIPMENT, ETC.
170"	FRONT 3794 lb.	REAR 2884 lb.	TOTAL 6678 lb.	14,322 lb.

STANDARD EQUIPMENT

ENGINE:

6 Cyl. Diesel O.H.V.
Displacement 330 cu. in.
Compression Ratio 16 to 1
Max. Gross Horsepower @ rpm. 115 @ 2800
Max. Net Horsepower @ rpm. 104 @ 2800
Max. Gross Torque lbs.-ft. @ rpm. 251.5 @ 1500
Max. Net Torque lbs.-ft. @ rpm. 239 @ 1500
Fuel Injector Pump Minimec Type
Air Cleaner Oil Bath 0.64 pts.
Oil Filter Full Flow Replaceable Cartridge

ALTERNATOR:

Lucas 43 amp.

AXLE, FRONT:

Solid I-Beam
Capacity 7000 lb.

AXLE, REAR:

Single Speed Hypoid
Capacity 16,500 lb.
Ratio 6.17 to 1

BATTERY:

12 volt — 120 amp.

BRAKES, SERVICE:

Hydraulic
Total Lining Area 440.72 sq. in.
Vacuum Booster Clayton Dewandre

BRAKES, PARKING:

Mech. by rod and cable on rear wheels
Total Lining Area 253.3 sq. in.

CLUTCH:

Diameter 12" dia.
Frictional Area 137.8 sq. in.

COOLING SYSTEM:

Capacity 29 pts.
Fan 4 Blade

FRAME:

Section Modulus 9.34

FUEL TANK:

20 imp. gallons

SHOCK ABSORBERS:

Front Lever Arm

SPRINGS, FRONT:

Capacity @ Pad 3130 lb.
Size — No. of Leaves 48" x 2.5" — 13

SPRINGS, REAR:

Main Capacity @ Pad 4220 lb.
Size — No. of Leaves 60" x 3" — 9
Auxiliary — Capacity @ Pad 3100 lb.
Size — No. of Leaves 42" x 3" — 9
Combined Capacity @ Pad 7320 lb.

STEERING: Worm and Peg
Ratio 20 to 1
Steering Wheel Diameter 19.81"

TRANSMISSION: 4 speed

TYRES: Tyres & Tubes
Front 8.25 x 20 — 10 ply
Dual Rear 8.25 x 20 — 12 ply

WHEELS: Disc Type
No. & Size 7 — 20" dia.
Rim Size B6.0
No. of Studs 8

ADDITIONAL STANDARD EQUIPMENT:

Dual Electric Windshield Wipers
Two Outside Rear View Mirrors
Locking Door Handles, Dome Light
Interior Sun Visors
Instruments: Fuel and Temperature Gauges, High Beam,
Alternator, Oil Pressure and Turn Indicator Lights,
Speedometer and Mileage Recorder.
Windscreen Washers.

OPTIONAL EQUIPMENT

AIR CLEANER: Cyclopak

AXLE, REAR: 2-speed Eaton 16802
Capacity 18,500 lbs.
Ratio 5.57/7.74 to 1

TYRES: Spare Tyre & Tube
as required above.