## Ford. Heavyweights in light commercials.



#### Ford. A force to be reckoned with in light commercials.

Thirty-seven separate models. A wide range of vans, pick-ups and light trucks. All designed to do a great carrying job for you.



Falcon GL van 4.1 litre Alloy Head II engine,

side-glass, lift-up, drop-down tailgate.

Falcon ute 3.3 litre Alloy Head II engine.

Falcon GL ute 4.1 litre Alloy Head II engine.

### All part of the FORD TRUCK FORCE



A fast growing force of vans, pick-ups and light trucks – now numbering thirty seven separate models. Around 400 authorised Ford Dealers Australia-wide can assist you with details of the right model for your application.

And remember, all Ford vehicles are backed by the Ford Dealer Network.

Service and replacement parts are doubly important when you're buying a commercial unit.

About this brochure. This brochure is designed to provide you with a general introduction to the Ford Products (including available optional equipment) referred to, and should be read in conjunction with the latest specification sheets. Because of changes in conditions and circumstances Ford reserves the right, subject to all applicable laws, at any time, at their discretion, and without notice to discontinue or change the features, designs, materials, colours and other specifications and the prices of their products, and to either permanently or temporarily withdraw any such products from the market without incurring any liability to any prospective purchaser or purchaser.

The latest specification sheet should be referred to for information on the availability, ordering and use of optional equipment. Always consult an Authorised Ford Dealer for the latest information with respect to features, specifications, prices, optional equipment and availability before deciding to place an order. FORD MOTOR COMPANY OF AUSTRALIA LIMITED

(Incorporated in Victoria) FORD SALES COMPANY OF AUSTRALIA LIMITED

(Incorporated in Victoria)

Registered offices: 1735 Sydney Road, Campbellfield, Victoria,

**PRINTED AUGUST 1984** 

LIGHT COMMERCIALS

# 

- A range of petrol and diesel models
- Including single and dual rear wheel configurations
- Vans, Crew-Cab and Chassis-Cab



#### **Standard Features**

 Five speed floor-mounted manual transmission • Comfortable, three-across seating (the XL Van and Crew-Cab seat six) • Contoured driver's seat . Push-button AM radio • Rack and pinion steering system • Remote fuel lid release\* • Remote rear door lock release\* • Heated rear window\* • Rear window wash/wipe\* • Finger-tip binnacle switches for rear demister, rear wash/wipe and remote rear door-lock release\* • Steering column stalks for headlights, turn indicators and windscreen wipe and wash . Rear step bumper\* • Monocoque body construction\* • Halogen headlamps • Intermittent setting for windscreen wipers • Left and right hand side exterior rear view mirrors • Front and rear interior lamps. door-operated\* (4.7 metre vans have front and dual rear interior lamps) • Four speed ventilation fan • Four

dash ventilation outlets •
Side window demister vent •
Front and rear mud flaps •
Gas-filled support struts for the rear door\* • Grab handles • Vinyl floor matting throughout (the XL Van has carpet in both the cabin and cargo area) • Illuminated ignition lock

#### **XL Van Features**

 Second row foldable seat with seat belts (the XL Van seats six) • Cloth seat facings • Half-sliding centre side windows and fixed rear side windows . Carpet floorcovering in the cabin and cargo area • Tripmeter • Ouartz analogue clock • Soft-feel steering wheel and gear shift knob • Centre caps on road wheels . Bright grille and body mouldings . Illuminated cigarette lighter and ashtray Airconditioning is optional on the XL Van model at

#### Engines

additional cost

#### 1.8 litre petrol engine

• 4 cylinder overhead camshaft crossflow petrol engine • Taxable horsepower (RAC rating), 18 HP • Compression ratio, 8.6:1 • Bore/stroke, 86mm×77mm (3.39"×3.03") • Maximum horsepower, 59.2 KW @ 5,000 RPM • Maximum torque, 137.0 Nm @ 2,800 RPM

#### 2.0 litre petrol engine

• 4 cylinder overhead camshaft crossflow petrol engine • Taxable horsepower (RAC rating), 18 HP • Compression ratio, 8.6:1 • Bore/stroke, 86mm×86mm (3.39"×3.39") • Maximum horsepower, 62.9 KW @ 5,000 RPM • Maximum torque, 152.9 Nm

@ 2800 RPM

#### 2.2 litre diesel engine

• 4 cylinder overhead camshaft diesel engine • Taxable horsepower (RAC rating) 18 HP • Compression ratio, 22.9:1 • Bore/stroke, 86mm×94mm (3.39"×3.70") • Maximum horsepower, 47 KW @ 4,250 RPM • Maximum torque, 133.3 Nm @ 2,000 RPM • Incorporates a quick start system for rapid, reliable cold starting

#### Transmission

• All Econovan Maxis have, as standard equipment, a five speed all-synchromesh transmission with floor mounted shift • Gear ratios, 4.712, 2.632, 1.479, 1.000, 0.825; Reverse, 4.050

#### Steering

• Rack and pinion steering • Ratio, 25:1 • Lock-to-lock, 4.6 turns

#### Suspension

• Fully independent front suspension system.

Designed for easy adjustment of geometry •
Rear suspension features two-stage semi-elliptic leaf springs. With splayed shock absorbers • The single rear wheel models have a conventional semi-floating rear axle. Dual rear wheel models have a rugged fully-floating rear axle

#### **Brakes**


- Dual line, power-assisted with a load-sensing gravity valve
   Ventilated front disc brakes
   Self-adjusting rear drum brakes
- \* These features are on Econovan Maxi Van models only

PRINTED APRIL 1984

|   | 4.4 MET         | 4.4 METRE       |                 |                    |                 | 4.7 METRE       |                 |                 |  |
|---|-----------------|-----------------|-----------------|--------------------|-----------------|-----------------|-----------------|-----------------|--|
| BODY STYLE                                  | Steel<br>Van    | Steel<br>Van    | Steel<br>Van    | XL<br>Glass<br>Van | Steel<br>Van    | Steel<br>Van    | Chassis<br>Cab  | Crew#           |  |
| Engine                                      | 1.8 L<br>Petrol | 2.2 L<br>Diesel | 1.8 L<br>Petrol | 1.8 L<br>Petrol    | 2.0 L<br>Petrol | 2.2 L<br>Diesel | 2.0 L<br>Petrol | 2.0 L<br>Petrol |  |
| Transmission (Number of forward gears)      | 5 Man           | 5 Man           | 5 Man           | 5 Man              | 5 Man           | 5 Man           | 5 Man           | 5 Man           |  |
| Rear Wheel Configuration                    | Dual            | Dual            | Single          | Single             | Dual            | Dual            | Dual            | Dual            |  |
| Cargo Ārea Dimensions (mm)                  |                 |                 |                 |                    |                 |                 |                 |                 |  |
| — Internal length                           | 2745            | 2745            | 2745            | 2585               | 3075            | 3075            | 8-8             | 2120#           |  |
| — Internal width                            | 1540            | 1540            | 1540            | 1540               | 1540            | 1540            | <del>-</del>    | 1600#           |  |
| — Internal height                           | 1260            | 1260            | 1350            | 1350               | 1260            | 1260            | _               | - T             |  |
| Gross Vehicle Mass (kg)                     | 2720            | 2720            | 2720            | 2720               | 3015            | 3015            | 3065            | 2860            |  |
| Kerbweight (kg)                             | 1365            | 1435            | 1330            | 1365               | 1415            | 1495            | 1130            | 1400            |  |
| Payload* (kg)                               | 1355            | 1285            | 1390            | 1355               | 1600            | 1520            | -‡              | 1460            |  |
| Maximum Permitted Axle Loading (kg)         |                 |                 |                 |                    |                 |                 |                 |                 |  |
| — Front                                     | 1440            | 1440            | 1440            | 1440               | 1550            | 1550            | 1580            | 1580            |  |
| — Rear                                      | 1750            | 1750            | 1680            | 1680               | 2150            | 2150            | 2140            | 2140            |  |
| Gross Combination Mass (kg)                 |                 |                 |                 |                    |                 |                 |                 |                 |  |
| (GVM plus trailer Mass)                     |                 |                 |                 |                    |                 |                 |                 |                 |  |
| <ul> <li>For trailer with brakes</li> </ul> | 3720            | 3720            | 3720            | 3720               | 4115            | 4115            | 4165            | 3960            |  |
| - For trailer without brakes                | 3380            | 3380            | 3380            | 3380               | 3675            | 3675            | 3725            | 3520            |  |
| Wheels - Front                              | 14×5J           | 14×5J           | 14×5J           | 14×5J              | 14×5J           | 14×5J           | 15×4.5K         | 15×4.5K         |  |
| — Rear                                      | 12×4J           | 12×4J           | 14×5J           | 14×5J              | 12×4J           | 12×4J           | 12×4J           | 12×4J           |  |
| Tyres — Front (Radial)                      | 185R×14         | 185R×14         | 185R×14         | 185R×14            | 185R×14         | 185R×14         | 6.00R×15        | 6.00R×15        |  |
| — Rear (Radial)                             | 155R×12         | 155R×12         | 185R×14         | 185R×14            | 155R×12         | 155R×12         | 155R×12         | 155R×12         |  |
| Turning Circle (kerb to kerb)               | 9.2             | 9.2             | 9.2             | 9.2                | 9.8             | 9.8             | 9.8             | 9.8             |  |

<sup>‡</sup>Depends upon body fitted to chassis-cab model


<sup>\*</sup>Payload is defined as GVM less kerb weight. Kerbweight includes all fluids, full fuel tank, less driver and passenger #A tray body will be standard fitment on Crew Cab vehicles built from April 1984 onwards.

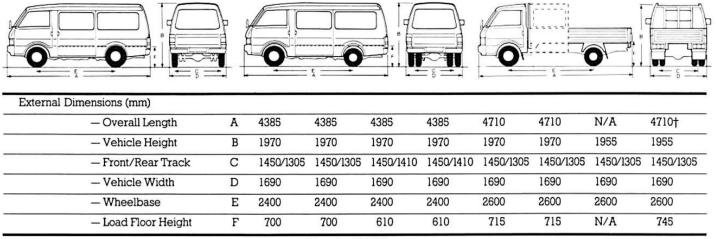

<sup>†</sup> Tray length 2120 mm

#### PLEASE NOTE:

<sup>\*</sup>FORD MOTOR COMPANY OF AUSTRALIA LIMITED (Incorporated in Victoria)
FORD SALES COMPANY OF AUSTRALIA LIMITED (Incorporated in Victoria)



PLEASE NOTE:

1. This specification sheet contains a general description only of the Ford Product referred to on the sheet, its specifications and features and the optional equipment which is currently available for use on or in connection with such product. Generally the optional equipment referred to is available at extra or variable cost. Certain optional equipment can only be used or ordered in combination with other optional equipment. 2. The illustrations, information and specifications presented and referred to in this specification sheet were correct at the time when the specification sheet was approved for printing. However, Ford Motor Company of Australia Limited and/or Ford Sales Company of Australia Limited reserve(s) the right, subject to the laws of Australia and/or any applicable State or Territory thereof and/or the regulations of any competent Authority which may apply from time to time, at their or its discretion at any time and without prior notice to discontinue or change the models, features, specifications, designs and prices of the product referred to in this sheet and any optional equipment therefor without incurring any liability whatsoever to any purchaser or prospective purchaser of any of such products. 3. All capacities, measurements, dimensions and weights quoted in this specification sheet are approximate only. 4. Because of the possibility of changes in models and the information, specifications, features, standard equipment and optional equipment of or for the product referred to in this specification sheet a prospective purchaser is strongly advised to consult an Authorised Ford Dealer for the latest information on models, specifications, features, standard equipment, optional equipment, prices and availability before placing an order. 5. From time to time deliveries are delayed by causes outside the reasonable control of Ford Motor Company of Australia Limited, Ford Sales Company of Australia Limited or their Authorised Ford Dealers. When an order has been placed, please keep