


CHEVROLET

LUVE



**As tough a little work horse
as you could hope to see.**

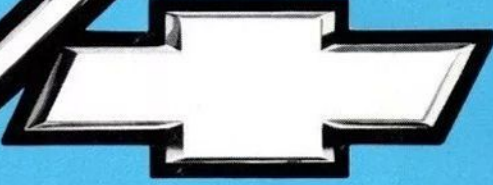


CHEVROLET LUV

**Tough! Safe! Powerful!
Economical!**


Your LUV is waiting. Waiting to get on with the job in the best Chevrolet tradition. Chevrolet LUV has what it takes to make a willing worker — a full length truck type chassis, a solid all steel pick-up body and unbeatable driver comfort and operating ease.

It's got a cross-flow overhead cam '1600' engine, 4-speed all synchro transmission, vacuum boosted hydraulic brake system, electric fuel pump. It'll take a tonne up after allowing 136 kg for the driver and passenger. Chevrolet LUV is backed by the GMH 12/20 warranty.

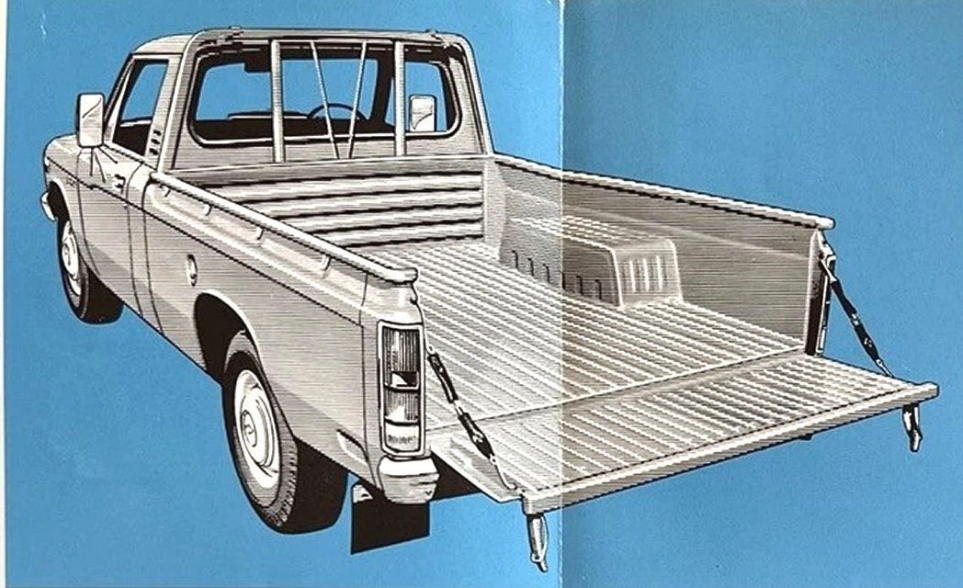

'1600' OHC Engine

The 4-cylinder, cross-flow single overhead cam engine produces a very healthy 82 horses, a willing response and money saving economy. LUV has the power and responsiveness to cover most applications. Reliable engineering helps ensure low maintenance and long life.

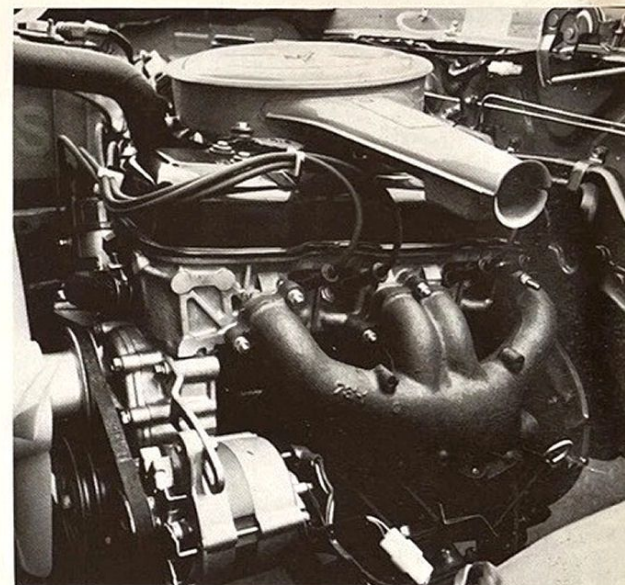

CHASSIS/CAB (Have the body custom built)


Means your body builder can attach the type of body you need, built to your specifications: van, tray, drop-side etc. Check the facts overleaf and then check with your GMH Dealer on earliest delivery. Remember, Chevrolet LUV has the back-up service and reliability of more than 500 GMH Dealers throughout Australia.





Check it out for comfort... features...finish

Roomy interior — here is comfort and driving ease in full measure. A wide fully padded bench seat, heater/demister, flow-through ventilation and grouped controls for driver convenience. All instruments are easy to read and include fuel and temperature gauges. The bench seat sits three in comfort and three seat belts are provided.

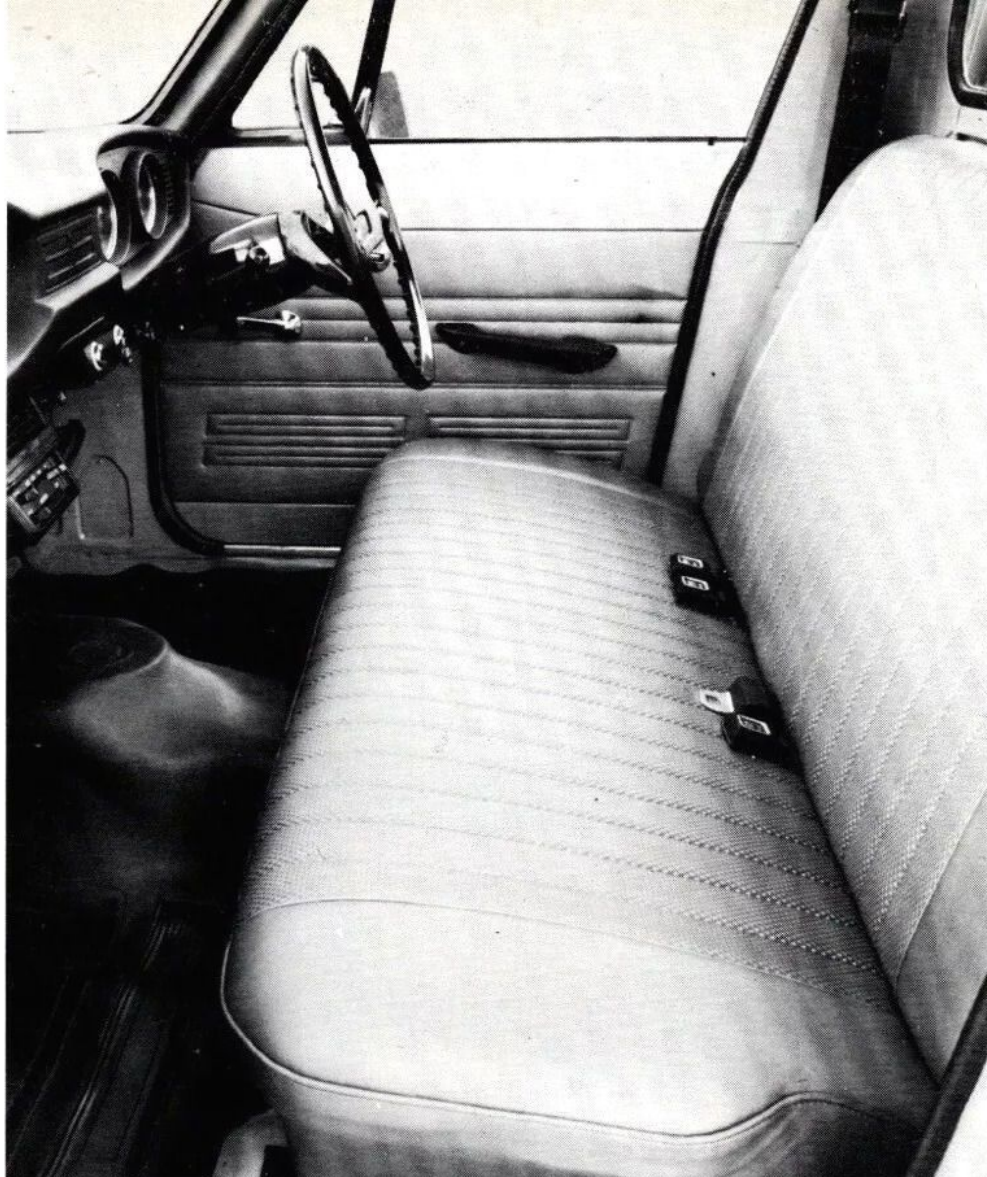

LUV (KB20): Facts and Figures

ENGINE: 4-cylinder petrol. Cross-flow single overhead cam. Hemi-spherical combustion chambers. Capacity 1584 cm³ (96.7 cu. in.). Bore 82 mm (3.23 ins.) x Stroke 75 mm (2.95 ins.). Gross output 61 kW (82 bhp) @ 5,200 rpm. Gross torque 127 Nm (94 lb/ft) @ 3,600 rpm. RAC rating 16.69.

ELECTRICAL: 12 volt, 40 amp hour rating battery, negative earth. 12 volt, 35 amp hour alternator.

FUEL SYSTEM: Electric fuel pump. 2-barrel, downdraft carburettor. Manual choke. Fuel tank capacity 50 litres (11.0 Imp. gallons).

LUBRICATION: Pressure feed system with full flow replaceable oil filter. Crankcase capacity 4.6 litres (8.1 pints) plus 0.4 litres (0.7 pints) for filter.

TRANSMISSION: 4-speed all synchromesh, column change. Ratios—First 4.314:1, Second 2.842:1, Third 1.630:1, Fourth 1.000:1. Reverse 4.354:1. Rear axle type—Banjo, housing with semi floating live axles. Rear axle ratio—4.556:1.

SUSPENSION: Front—Independent wishbone arms, torsion bar springs with stabiliser bar. Rear—6 semi-elliptic leaf springs with rubber bushings. Double acting hydraulic telescopic shock absorbers, front and rear.

STEERING: Overall ratio 22.4:1. Recirculating ball, collapsible lower shaft. Turning circle—Wall to Wall—11.0 metres (36.09 ft).


BRAKES: 4-wheel hydraulic with split circuit, tandem master cylinder and vacuum booster. Self-adjusting 254 mm (10.0 ins.) diam.

drums front and rear. Parking brake mounted under dash panel, mechanical on rear wheels.

WHEELS AND TYRES: 4.5 J x 14 steel disc wheels 6.00 x 14, 8-ply tubeless tyres front, rear and spare.

WEIGHTS: Estimated kerb weight—Pick-up model—1095 kg. (2414 lbs.). Chassis/Cab model—975 kg. (2150 lbs.). GVW—both models 2238 kg. (4934 lbs.). Carrying Capacity—Pick-up model—1143 kg. (2520 lbs.) for driver/passengers and payload. Chassis/Cab model—1263 kg. (2784 lbs.) for driver/passengers, body and payload. *Note:* If body construction does not exceed 127 kg (280 lbs.), carrying capacity will permit a one tonne payload plus 136 kg. driver/passenger allowance.

STANDARD EQUIPMENT: Laminated windshield, 2-speed windshield wipers and washers. 2 exterior rear view mirrors. Mudflaps (pick-up model). Four headlights. Hazard warning flashers. Tool kit. Screw-type jack and tools. Lifting type spare wheel carrier and tyre. Flow through ventilation. Heater/demister. Full width bench seat. Three seat belts (lap/sash retractor type in outboard positions). Twin sunvisors. Knock-out interior rear vision mirror. Glove box. Parcel shelf. Interior light. Kilometre speedometer/odometer. Water temperature and fuel gauges. Warning lights for headlamp high beam, oil pressure, generator, turn indicators and parking brake.

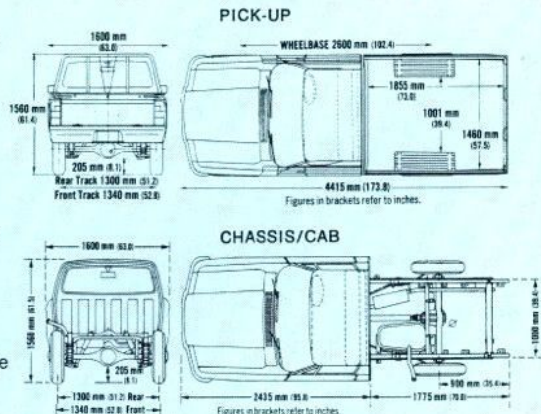

All illustrations and specifications contained in this catalogue are based on the latest product information available at time of publication approval. The right is reserved to make changes at any time, without notice, in prices, colours, materials, equipment, specifications and models and to discontinue models. Some of the equipment shown or described throughout this catalogue is available at extra cost. Check with your GMH Dealer for complete information.

General Motors-Holden's
Sales Pty. Ltd. K245.
Copyright 6/77.

