




Pocket Resource

1994

PRODUCT INFORMATION

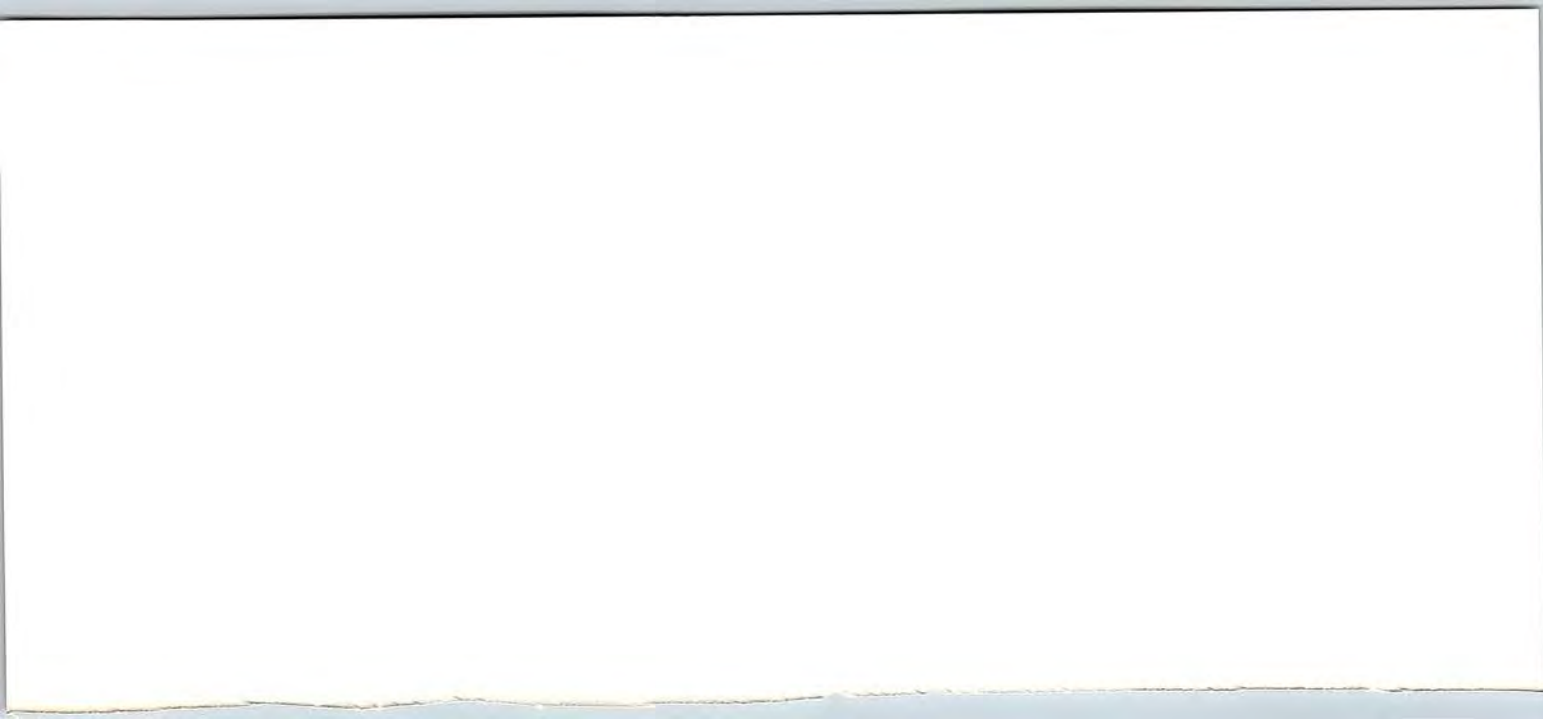

'94 TABLE OF CONTENTS

Tercel	2
Corolla.....	4
Camry Sedan.....	6
Camry Coupe	8
Camry Wagon	10
Previa	12
4Runner.....	14
Land Cruiser.....	16

Paseo	18
Celica	20
Supra	22
4x2 Trucks	24
4x4 Trucks	26
T100 4x2 Trucks	28
T100 4x4 Trucks	30

		2-DOOR SEDAN (1301)	2-DOOR DX SEDAN (1315/1316)	4-DOOR DX SEDAN (1325/1326)
MECHANICAL				
Engine	Type	1.5-L 4-Cyl SOHC 12-V EFI	1.5-L 4-Cyl SOHC 12-V EFI	1.5-L 4-Cyl SOHC 12-V EFI
	Horsepower (bhp @ rpm)	82 @ 5200	82 @ 5200	82 @ 5200
	Torque (lb-ft @ rpm)	89 @ 4400	89 @ 4400	89 @ 4400
	MPG (est. EPA city/hwy)	4M - 31/36	5M - 28/34 3A - 26/29	5M - 28/34 3A - 26/29
Drivetrain	Type	Front-wheel drive	Front-wheel drive	Front-wheel drive
Transmissions	(standard)	4-speed manual	5-speed manual overdrive	5-speed manual overdrive
	(optional)	NA	3-speed automatic	3-speed automatic
Suspension	front	Ind; MacPherson strut	Ind; MacPherson strut	Ind; MacPherson strut
	rear	Trailing torsion beam w. stab. bar	Trailing torsion beam w. stab. bar	Trailing torsion beam w. stab. bar
Steering	Type (standard)	Rack-and-pinion	Rack-and-pinion	Rack-and-pinion
	(optional)	NA	Power-asstd. rack-and-pinion	Power-asstd. rack-and-pinion
	Ratio (std/opt)	21.8:1 / NA	21.8:1 / 17.5:1	21.8:1 / 17.5:1
	Turning Diameter* (ft.)	31.5	31.5	31.5
Brakes**	front/rear	Ventilated disc/drum	Ventilated disc/drum	Ventilated disc/drum
	(optional)	Anti-lock Brake System ¹	Anti-lock Brake System ¹	Anti-lock Brake System ¹
Wheels	Type/Size	Steel / 4.5 x 13	Steel / 4.5 x 13	Steel / 4.5 x 13
Tires	Type	Steel-belted radial	All-season steel-belted radial	All-season steel-belted radial
	Size	145/80R13	155/80R13	155/80R13

WHAT'S NEW...**ALL MODELS**

- Addition of Automatic Locking Retractor (ALR) to outboard passenger seatbelts
- Air conditioning (CFC-free)
- California/New York Emissions option (CA)
- Deleted model: LE Sedan (1335/1336)
- New dealer/port installed options
 - Wheel locks
 - Cargo net

2-DOOR/4-DOOR DX SEDAN

- Color-keyed bumpers and black bodyside moldings optional (part of Appearance Package (AK))
- Value Package option (VP)

Tires	Spare	Temporary ¹	Temporary ¹	Temporary ¹
Capacities	Curb Weights (lbs.)	4M - 1950	5M - 1975 3A - 2025	5M - 2005 3A - 2055
	Fuel Tank (gals.)	11.9	11.9	11.9
	Towing (lbs.)	Not recommended	Not recommended	Not recommended
Restraint Systems	Air Bag (SRS)	Driver-side	Driver-side	Driver-side
	Seatbelts front	Driver 3-pt. ² , Pass. 2-pt. ^{4,5,6}	Driver 3-pt. ² , Pass. 2-pt. ^{4,5,6}	Driver 3-pt. ^{2,3} , Pass. 2-pt. ^{4,5,6}
	rear	Outboard 3-pt. ⁵ , Center 2-pt. lap	Outboard 3-pt. ⁵ , Center 2-pt. lap	Outboard 3-pt. ⁵ , Center 2-pt. lap

EXTERIOR

Wheelbase	(in.)	93.7	93.7	93.7
Overall Length	(in.)	161.8	161.8	161.8
Overall Width	(in.)	64.8	64.8	64.8
Overall Height	(in.)	53.2	53.2	53.2
Tread Width	front/rear (in.)	55.1 / 56.3	55.1 / 56.3	55.1 / 56.3
Drag Coefficient	(C _D)	.34	.34	.34

INTERIOR

Seating Capacity		5	5	5
Head Room	front/rear (in.)	38.7 / 36.7	38.7 / 36.7	38.2 / 36.2
Leg Room	front/rear (in.)	41.2 / 31.9	41.2 / 31.9	41.2 / 31.9
Shoulder Room	front/rear (in.)	53.0 / 52.4	53.0 / 52.4	53.0 / 52.2
Hip Room	front/rear (in.)	53.7 / 42.3	53.7 / 42.3	49.3 / 42.3
Trunk/Cargo	seat up (cu. ft.)	10.7	10.7	10.7

NA Feature not available

* Curb-to-curb

** Power-Assisted

1 Larger temporary spare tire with optional ABS

2 Emergency Locking Retractor (ELR)

3 With adjustable shoulder belt anchor

4 Non-motorized shoulder belt with manual lap belt

5 Emergency Locking Retractor (ELR)/Automatic Locking Retractor (ALR)

6 With pivoting shoulder belt anchor

		4-DOOR SEDAN (1700/1701)	4-DOOR DX SEDAN (1702/1704)	4-DOOR LE SEDAN (1706)	5-DOOR DX WAGON (1766/1767)
MECHANICAL					
Engine	Type	1.6-L 4-Cyl DOHC* 16-V EFI	1.8-L 4-Cyl DOHC* 16-V EFI	1.8-L 4-Cyl DOHC* 16-V EFI	1.8-L 4-Cyl DOHC* 16-V EFI
	Horsepower (bhp @ rpm)	105 @ 5800 (100 @ 5800 CA/NY)	115 @ 5600 (110 @ 5600 CA/NY)	115 @ 5600 (110 @ 5600 CA/NY)	115 @ 5600 (110 @ 5600 CA/NY)
	Torque (lb-ft @ rpm)	100 @ 4800	115 @ 2800	115 @ 2800	115 @ 2800
	MPG (est. EPA city/hwy)	5M - 27/34 3A - 26/29	5M - 27/33 4ECT - 26/33	4ECT - 26/33	5M - 27/33 4ECT - 26/33
Drivetrain	Type	Front-wheel drive	Front-wheel drive	Front-wheel drive	Front-wheel drive
Transmissions	(standard)	5-speed manual overdrive	5-speed manual overdrive	4-speed ECT auto overdrive	5-speed manual overdrive
	(optional)	3-speed automatic	4-speed ECT auto overdrive	NA	4-speed ECT auto overdrive
Suspension	front	Ind; MacPherson strut	Ind; MacPherson strut w/stab. bar	Ind; MacPherson strut w/stab. bar	Ind; MacPherson strut w/stab. bar
	rear	Ind; MacPherson strut w/stab. bar	Ind; MacPherson strut w/stab. bar	Ind; MacPherson strut w/stab. bar	Ind; MacPherson strut w/stab. bar
Steering	Type (standard)	Rack-and-pinion	Power-asstd. rack-and-pinion	Power-assisted rack-and-pinion	Power-assisted rack-and-pinion
	(optional)	Power-asstd. rack-and-pinion	NA	NA	NA
	Ratio (std/opt)	22.7:1 / 18.5:1	18.5:1 / NA	18.5:1 / NA	18.5:1 / NA
	Turning Diameter** (ft.)	32.2	32.2	32.2	32.2
Brakes***	front/rear	Ventilated disc/drum	Ventilated disc/drum	Ventilated disc/drum	Ventilated disc/drum
	(optional)	Anti-lock Brake System ¹	Anti-lock Brake System	Anti-lock Brake System	Anti-lock Brake System
Wheels	Type/Size (standard)	Steel / 5.5 x 14	Steel / 5.5 x 14	Steel / 5.5 x 14	Steel / 5.5 x 14
	(optional)	NA	NA	Alloy / 5.5 x 14	NA
Tires	Type	All-season steel-belted radial	All-season steel-belted radial	All-season steel-belted radial	All-season steel-belted radial

WHAT'S NEW...**ALL MODELS**

- Passenger-side air bag (SRS)
- Addition of Automatic Locking Retractor (ALR) to outboard passenger seatbelts
- Air conditioning (CFC-free)
- New exterior color: Wintergreen Metallic (6M8)
- Deleted exterior color: Tawny Rose Metallic (3K5)
- California/New York Emissions option (CA)
- Deleted feature: driver-side footrest
- New dealer/port installed options
 - Wood dash
 - Sunroof wind deflector
 - Cargo net (Sedan only)

Tires	Size	175/65R14	185/65R14	185/65R14	185/65R14
	Spare	Temporary ¹	Larger temporary	Larger temporary	Larger temporary
Capacities	Curb Weights (lbs.)	5M - 2304 3A - 2348	5M - 2370 4ECT - 2447	4ECT - 2513	5M - 2392 4ECT - 2469
	Fuel Tank (gals.)	13.2	13.2	13.2	13.2
	Towing (lbs.)	1500	1500	1500	1500
Restraint Systems	Air Bag (SRS)	Driver- and passenger-side	Driver- and passenger-side	Driver- and passenger-side	Driver- and passenger-side
	Seatbelts front	Driver 3-pt. ^{2,4} , Pass. 3-pt. ^{3,4}	Driver 3-pt. ^{2,4} , Pass. 3-pt. ^{3,4}	Driver 3-pt. ^{2,4} , Pass. 3-pt. ^{3,4}	Driver 3-pt. ^{2,4} , Pass. 3-pt. ^{3,4}
	rear	Outboard 3-pt. ³ , Ctr. 2-pt. lap	Outboard 3-pt. ³ , Ctr. 2-pt. lap	Outboard 3-pt. ³ , Ctr. 2-pt. lap	Outboard 3-pt. ³ , Ctr. 2-pt. lap
EXTERIOR					
Wheelbase	(in.)	97.0	97.0	97.0	97.0
Overall Length	(in.)	172.0	172.0	172.0	172.0
Overall Width	(in.)	66.3	66.3	66.3	66.3
Overall Height	(in.)	53.5	53.5	53.5	55.3
Tread Width	front/rear (in.)	57.5 / 57.1	57.5 / 57.1	57.5 / 57.1	57.5 / 57.1
Drag Coefficient	(C _D)	.33	.33	.33	.36
INTERIOR					
Seating Capacity		5	5	5	5
Head Room	front/rear (in.)	38.8 / 37.1	38.8 / 37.1	38.8 / 37.1	38.8 / 39.7
Leg Room	front/rear (in.)	42.4 / 33.0	42.4 / 33.0	42.4 / 33.0	42.4 / 33.0
Shoulder Room	front/rear (in.)	54.1 / 53.5	54.1 / 53.5	54.1 / 53.5	54.1 / 53.5
Hip Room	front/rear (in.)	51.3 / 54.3	51.3 / 54.3	51.3 / 54.3	51.3 / 45.9
Trunk/Cargo	seat up/down (cu. ft.)	12.7 / NA	12.7 / —	12.7 / —	31.4 / 64.8

NA Feature not available
 — Information not available
 * Marketed as Twin-Cam
 ** Curb-to-curb
 *** Power-Assisted

1 Larger temporary spare tire with optional ABS
 2 Emergency Locking Retractor (ELR)
 3 Emergency Locking Retractor (ELR)/Automatic Locking Retractor (ALR)
 4 With adjustable shoulder belt anchors

4-DOOR STANDARD

- Rear-window defogger can be ordered as a separate option {DE}
- Value Package option {VP}

4-DOOR DX SEDAN

- Larger temporary spare tire
- Optional All-Weather Guard Equipment Package {CK} (rear-window defogger remains standard)
- Optional Power Package {PO}
- Optional factory mudguards {MG}
- Value Package option {VP}

4-DOOR LE SEDAN

- Larger temporary spare tire
- Optional factory mudguards {MG}
- Value Package option {VP}

5-DOOR DX WAGON

- Larger temporary spare tire
- Optional All-Weather Guard Equipment Package {CK}
- Optional factory mudguards {MG}

		4-CYL SEDAN DX / LE / XLE (2521/2522) / (2532) / (2540)	V6 SEDAN LE / XLE / SE (2534) / (2544) / (2546)
MECHANICAL			
Engine	Type	2.2-L 4-Cyl DOHC* 16-V EFI	3.0-L V6 DOHC** 24-V EFI
	Horsepower (bhp @ rpm)	125 @ 5400	188 @ 5200
	Torque (lb-ft @ rpm)	145 @ 4400	203 @ 4400
	MPG (est. EPA city/hwy)	5M - 22/30 4ECT - 21/28	4ECTi - 18/25
Drivetrain	Type	Front-wheel drive	Front-wheel drive
Transmissions	(standard)	DX: 5-speed manual overdrive LE, XLE: 4-speed ECT automatic overdrive	4-speed ECTi automatic overdrive
	(optional)	DX: 4-speed ECT automatic overdrive	NA
Suspension	front	Ind; MacPherson strut with stabilizer bar	Ind; MacPherson strut with stabilizer bar
	rear	Ind; MacPherson strut with stabilizer bar	Ind; MacPherson strut with stabilizer bar
Steering	Type	Power-assisted rack-and-pinion	Power-assisted rack-and-pinion ^{1,2}
	Ratio	17.4:1	17.4:1 / SE: 15.9:1
	Turning Diameter*** (ft.)	35.4	36.7
Brakes†	front/rear	Ventilated disc/drum	4-wheel disc ³
	(optional)	4-wheel disc with ABS ^{3,4}	Anti-lock Brake System ⁴
Wheels	Type/Size (standard)	DX, LE: Steel / 5.5 x 14 / XLE: Alloy / 5.5 x 14	LE: Steel / 6.0 x 15 / XLE, SE: Alloy / 6.0 x 15
	(optional)	LE: Alloy / 5.5 x 14	LE: Alloy / 6.0 x 15
Tires	Type	All-season steel-belted radial	All-season steel-belted radial ⁵

WHAT'S NEW...**ALL MODELS**

- Passenger-side air bag (SRS)
- Addition of Automatic Locking Retractor (ALR) to outboard passenger seatbelts
- Air conditioning (CFC-free)
- All-new aluminum alloy V6 engine
- 4-cylinder and V6 engines meet 50-State Emissions requirements
- Horsepower:
 - 4-cylinder: 125 @ 5400 rpm
 - V6: 188 @ 5200 rpm
- Anti-noise hood pad added to all V6 models
- Hood pad added to 4-cylinder models for heat protection
- New 4ECTi with V6 engine
- Five new exterior colors
- Blue interior color deleted (87)
- Dash storage box door under standard radio
- Sedan and Wagon meet 1997 dynamic side door impact standards

Tires	Size	195/70R14	205/65R15 / SE: 205/65R15 92V
	Spare	Full-size	Full-size
Capacities	Curb Weights (lbs.)	DX: 5M - 2932 4ECT - 2976 / LE: 3086 / XLE: 3131	LE: 3241 / XLE: 3274 / SE: 3186
	Fuel Tank (gals.)	18.5	18.5
	Towing (lbs.)	2000	2000
Restraint Systems	Air Bag (SRS)	Driver- and passenger-side	Driver- and passenger-side
	Seatbelts front	Driver 3-point ^{6, 8} , Passenger 3-point ^{7, 8}	Driver 3-point ^{6, 8} , Passenger 3-point ^{7, 8}
	rear	Outboard 3-point ⁷ , Center 2-point lap belt	Outboard 3-point ⁷ , Center 2-point lap belt
EXTERIOR			
Wheelbase	(in.)	103.1	103.1
Overall Length	(in.)	187.8	187.8
Overall Width	(in.)	69.7	69.7
Overall Height	(in.)	55.1	55.1
Tread Width	front/rear (in.)	61.0 / 59.0	61.0 / 59.0
Drag Coefficient	(C _D)	.334	.336
INTERIOR			
Seating Capacity		5	5
Head Room	front/rear (in.)	DX, LE: 38.4 / 37.1 / XLE: 37.0 ⁹ / 36.1 ⁹	LE, SE: 38.4 / 37.1 / XLE: 37.0 ⁹ / 36.1 ⁹
Leg Room	front/rear (in.)	43.5 / 35.0	43.5 / 35.0
Shoulder Room	front/rear (in.)	56.8 / 56.1	56.8 / 56.1
Hip Room	front/rear (in.)	56.0 / 56.8	56.0 / 56.8
Trunk/Cargo	seat up/down (cu. ft.)	14.9 / —	14.9 / —

NA Feature not available
 — Information not available
 * Marketed as Twin-Cam
 ** Marketed as Four-Cam
 *** Curb-to-curb
 † Power-Assisted

1 Quick-ratio on SE
 2 Includes power steering oil cooler
 3 Ventilated disc/solid disc
 4 Includes rear brake Load-Sensing Proportioning Valve (LSPV)
 5 Speed-rated radials standard on SE

6 Emergency Locking Retractor (ELR)
 7 Emergency Locking Retractor (ELR)/Automatic Locking Retractor (ALR)
 8 With adjustable shoulder belt anchor
 9 Due to standard sunroof

- Trunk deck lid trim
- Retained power feature with power windows and door locks
- Door courtesy lamp deleted on Sedan
- New dealer/port installed options
 - Cellular mobile telephones, wood dash, cargo net and cargo mat

DX MODELS

- Dual black remote-controlled mirrors
- Color-keyed door handles
- Revised DX cloth seat trim
- Power door lock option (PL)
- Deleted model: DX Sedan 4ECT/V6 (2524)

LE MODELS

- New LE cloth seat trim
- Plastic front seat backboard deleted

SE MODELS

- Color-keyed door handles
- Leather Trim Package optional
- Adjustable lumbar support added to driver's seat (Sedan only)
- Power windows, door locks and mirrors standard
- Cruise control standard
- Deleted model: SE Sedan 5M/V6 (2545)

		4-CYL COUPE DX / LE (2501/2502) / (2504)	V6 COUPE LE / SE (2506) / (2508)
MECHANICAL			
Engine	Type	2.2-L 4-Cyl DOHC* 16-V EFI	3.0-L V6 DOHC** 24-V EFI
	Horsepower (bhp @ rpm)	125 @ 5400	188 @ 5200
	Torque (lb-ft @ rpm)	145 @ 4400	203 @ 4400
	MPG (est. EPA city/hwy)	5M - 22/30 4ECT - 21/28	4ECTi - 18/25
Drivetrain	Type	Front-wheel drive	Front-wheel drive
Transmissions	(standard)	DX: 5-speed manual overdrive LE: 4-speed ECT automatic overdrive	4-speed ECTi automatic overdrive
	(optional)	DX: 4-speed ECT automatic overdrive	NA
Suspension	front	Ind; MacPherson strut with stabilizer bar	Ind; MacPherson strut with stabilizer bar
	rear	Ind; MacPherson strut with stabilizer bar	Ind; MacPherson strut with stabilizer bar
Steering	Type	Power-assisted rack-and-pinion	Power-assisted rack-and-pinion ^{1,2}
	Ratio (std/opt)	17.4:1	17.4:1 / SE: 15.9:1
	Turning Diameter*** (ft.)	35.4	36.7
Brakes†	front/rear	Ventilated disc/drum	4-wheel disc ³
	(optional)	4-wheel disc with ABS ^{3,4}	Anti-lock Brake System ⁴
Wheels	Type/Size (standard)	Steel / 5.5 x 14	LE: Steel / 6.0 x 15 / SE: Alloy / 6.0 x 15
	(optional)	LE: Alloy / 5.5 x 14	LE: Alloy / 6.0 x 15
Tires	Type	All-season steel-belted radial	All-season steel-belted radial ⁵

WHAT'S NEW...**ALL MODELS**

- All-new Camry Coupe body style
- Passenger-side air bag (SRS)
- Addition of Automatic Locking Retractor (ALR) to outboard passenger seatbelts
- Air conditioning (CFC-free)
- All-new aluminum alloy V6 engine
- 4-cylinder and V6 engines meet 50-State Emissions requirements
- Horsepower:
 - 4-cylinder: 125 @ 5400 rpm
 - V6: 188 @ 5200 rpm
- Anti-noise hood pad added to all V6 models
- Hood pad added to 4-cylinder models for heat protection
- New 4ECTi with V6 engine
- Five new exterior colors
- Blue interior color deleted (87)
- Dash storage box door under standard radio

Tires	Size (standard)	195/70R14	205/65R15 / SE: 205/65R15 92V
	Spare	Full-size	Full-size
Capacities	Curb Weights (lbs.)	DX: 5M - 2910 4ECT-2954 / LE: 3064	LE: 3219 / SE: 3164
	Fuel Tank (gals.)	18.5	18.5
	Towing (lbs.)	2000	2000
Restraint Systems	Air Bag (SRS)	Driver- and passenger-side	Driver- and passenger-side
	Seatbelts front	Driver 3-point ^{6, 8} , Passenger 3-point ^{7, 8}	Driver 3-point ^{6, 8} , Passenger 3-point ^{7, 8}
	rear	Outboard 3-point ⁷ , Center 2-point lap belt	Outboard 3-point ⁷ , Center 2-point lap belt
EXTERIOR			
Wheelbase	(in.)	103.1	103.1
Overall Length	(in.)	187.8	187.8
Overall Width	(in.)	69.7	69.7
Overall Height	(in.)	54.9	54.9
Tread Width	front/rear (in.)	61.0 / 59.0	61.0 / 59.0
Drag Coefficient	(C _D)	.33	.33
INTERIOR			
Seating Capacity		5	5
Head Room	front/rear (in.)	38.4 / 37.4	38.4 / 37.4
Leg Room	front/rear (in.)	43.5 / 33.0	43.5 / 33.0
Shoulder Room	front/rear (in.)	56.5 / 55.2	56.5 / 55.2
Hip Room	front/rear (in.)	54.2 / 53.0	54.2 / 53.0
Trunk/Cargo	seat up/down (cu. ft.)	14.9 / —	14.9 / —

NA Feature not available
 — Information not available
 * Marketed as Twin-Cam
 ** Marketed as Four-Cam
 *** Curb-to-curb
 † Power-Assisted

1 Quick-ratio on SE
 2 Includes power steering oil cooler
 3 Ventilated disc/solid disc
 4 Includes rear brake Load-Sensing Proportioning Valve (LSPV)

5 Speed-rated radials standard on SE
 6 Emergency Locking Retractor (ELR)
 7 Emergency Locking Retractor (ELR)/Automatic Locking Retractor (ALR)
 8 With service arm and sill bar for driver and front passenger

- Trunk deck lid trim
- Retained power with power windows and door locks
- New dealer/port installed options
 - Cellular mobile telephones.
 - wood dash, cargo net and cargo mat

DX MODELS

- Dual black remote-controlled mirrors
- Color-keyed door handles
- Revised DX cloth seat trim
- Power door lock option [PL]

LE MODELS

- New LE cloth seat trim
- Adjustable lumbar support added to driver's seat (LE Coupe only)
- Plastic front seat backboard deleted

SE MODELS

- Color-keyed door handles
- Leather Trim Package optional
- Power windows, door locks and mirrors standard
- Cruise control standard

		4-CYL WAGON DX / LE (2590) / (2594)	V6 WAGON LE (2596)
MECHANICAL			
Engine	Type	2.2-L 4-Cyl DOHC* 16-V EFI	3.0-L V6 DOHC** 24-V EFI
	Horsepower (bhp @ rpm)	125 @ 5400	188 @ 5200
	Torque (lb-ft @ rpm)	145 @ 4400	203 @ 4400
	MPG (est. EPA city/hwy)	4ECT - 21/28	4ECTi - 18/24
Drivetrain	Type	Front-wheel drive	Front-wheel drive
Transmissions	(standard)	4-speed ECT automatic overdrive	4-speed ECTi automatic overdrive
Suspension	front	Ind; MacPherson strut with stabilizer bar	Ind; MacPherson strut with stabilizer bar
	rear	Ind; MacPherson strut with stabilizer bar	Ind; MacPherson strut with stabilizer bar
Steering	Type	Power-assisted rack-and-pinion	Power-assisted rack-and-pinion ¹
	Ratio	17.4:1	17.4:1
	Turning Diameter*** (ft.)	35.4	36.7
Brakes†	front/rear	Ventilated disc/drum with LSPV ²	4-wheel disc ³ with LSPV ²
	(optional)	4-wheel disc ³ with ABS	Anti-lock Brake System
Wheels	Type/Size (standard)	Steel / 5.5 x 14	Steel / 6.0 x 15
	(optional)	LE: Alloy / 5.5 x 14	Alloy / 6.0 x 15
Tires	Type	All-season steel-belted radial	All-season steel-belted radial
	Size	195/70R14	205/65R15
	Spare	Full-size ⁴	Full-size ⁴

WHAT'S NEW...**ALL MODELS**

- Passenger-side air bag (SRS)
- Addition of Automatic Locking Retractor (ALR) to outboard passenger seatbelts
- Air conditioning (CFC-free)
- All-new aluminum alloy V6 engine
- 4-cylinder and V6 engines meet 50-State Emissions requirements
- Horsepower:
 - 4-cylinder: 125 @ 5400 rpm
 - V6: 188 @ 5200 rpm
- Anti-noise hood pad added to all V6 models
- Hood pad added to 4-cylinder models for heat protection
- New 4ECTi with V6 engine
- Five new exterior colors
- Blue interior color deleted (87)

Capacities	Curb Weights (lbs.)	DX: 3175 / LE: 3263	3406
	Fuel Tank (gals.)	18.5	18.5
	Towing (lbs.)	2000	2000
Restraint Systems	Air Bag (SRS)	Driver- and passenger-side	Driver- and passenger-side
	Seatbelts front	Driver 3-point ^{5, 7} , Passenger 3-point ^{6, 7}	Driver 3-point ^{5, 7} , Passenger 3-point ^{6, 7}
	rear	Outboard 3-point ⁶ , Center 2-point lap belt	Outboard 3-point ⁶ , Center 2-point lap belt
EXTERIOR			
Wheelbase	(in.)	103.1	103.1
Overall Length	(in.)	189.4	189.4
Overall Width	(in.)	69.7	69.7
Overall Height	(in.)	56.3	56.5
Tread Width	front/rear (in.)	61.0/59.1	61.0/59.1
Drag Coefficient	(C _D)	.35	.35
INTERIOR			
Seating Capacity		5 / 7 ⁸	5 / 7 ⁸
Head Room	front/rear (in.)	39.2 / 38.8 / 30.4 ⁸	39.2 / 38.8 / 30.4 ⁸
Leg Room	front/rear (in.)	43.5 / 34.7 / 28.0 ⁸	43.5 / 34.7 / 28.0 ⁸
Shoulder Room	front/rear (in.)	56.8 / 56.0 / 47.4 ⁸	56.8 / 56.0 / 47.4 ⁸
Hip Room	front/rear (in.)	56.0 / 57.0 / 41.6 ⁸	56.0 / 57.0 / 41.6 ⁸
Trunk/Cargo	seat up/down (cu. ft.)	40.5 / 74.8	40.5 / 74.8

NA Feature not available
 — Information not available
 * Marketed as Twin-Cam
 ** Marketed as Four-Cam
 *** Curb-to-curb
 † Power-Assisted

1 Includes power steering oil cooler
 2 Includes rear brake Load-Sensing Proportioning Valve (LSPV)
 3 Ventilated disc/solid disc
 4 Temporary spare with Third Seat Package (TH) option
 5 Emergency Locking Retractor (ELR)

6 Emergency Locking Retractor (ELR)/Automatic Locking Retractor (ALR)
 7 With adjustable shoulder belt anchor
 8 With optional Third Rear Seat Package (TH)

- Sedan and Wagon meet 1997 dynamic side door impact standards
- Dash storage box door under standard radio
- Trunk deck lid trim
- Retained power feature on all Camrys equipped with power windows and door locks
- New dealer/port installed options
 - Cellular mobile telephones (fixed/portable)
 - Wood dash

DX MODELS

- Dual black remote-controlled mirrors
- Color-keyed door handles
- Revised DX cloth seat trim
- Power door lock option (PL)

LE MODELS

- New LE cloth seat trim
- Plastic front seat backboard deleted

		DX (5122)	LE (5132)	ALL-TRAC DX (5142)	ALL-TRAC LE (5152)
MECHANICAL					
Engine	Type	2.4-L 4-Cyl DOHC* 16-V EFI	2.4-L 4-Cyl DOHC* 16-V EFI	2.4-L 4-Cyl DOHC* 16-V EFI	2.4-L 4-Cyl DOHC* 16-V EFI
	Horsepower (bhp @ rpm)	138 @ 5000	138 @ 5000	138 @ 5000	138 @ 5000
	Torque (lb-ft @ rpm)	154 @ 4000	154 @ 4000	154 @ 4000	154 @ 4000
	MPG (est. EPA city/hwy)	4ECT - 17/22	4ECT - 17/22	4ECT - 17/20	4ECT - 17/20
Drivetrain	Type	Mid-engine/rear-wheel drive	Mid-engine/rear-wheel drive	Mid-engine/all-wheel drive	Mid-engine/all-wheel drive
Transmissions	(standard)	4-speed ECT auto overdrive	4-speed ECT auto overdrive	4-speed ECT auto overdrive	4-speed ECT auto overdrive
Suspension	front	Ind; MacPherson strut w/ stab. bar	Ind; MacPherson strut w/ stab. bar	Ind; MacPherson strut w/ stab. bar	Ind; MacPherson strut w/ stab. bar
	rear	Solid axle; 4-link coil spring	Solid axle; 4-link coil spring	Solid axle; 4-link coil spring	Solid axle; 4-link coil spring
Steering	Type	Power-asstd. rack-and-pinion	Power-asstd. rack-and-pinion	Power-asstd. rack-and-pinion	Power-asstd. rack-and-pinion
	Ratio	18.6:1	18.6:1	18.6:1	18.6:1
	Turning Diameter** (ft.)	37.4	37.4	37.4	37.4
Brakes***	front/rear	Ventilated disc/drum w/ LSPV ¹	4-wheel vent. disc w/ LSPV ¹	Ventilated disc/drum w/ LSPV ¹	4-wheel vent. disc w/ LSPV ¹
	(optional)	4-wheel vent. disc w/ ABS	Anti-lock Brake System	4-wheel vent. disc w/ ABS	Anti-lock Brake System
Wheels	Type/Size (standard)	Steel / 6.0 x 15	Steel / 6.0 x 15	Steel / 6.0 x 15	Steel / 6.0 x 15
	(optional)	NA	Alloy / 6.0 x 15	NA	Alloy / 6.0 x 15
Tires	Type	All-season steel-belted radial	All-season steel-belted radial	All-season steel-belted radial	All-season steel-belted radial
	Size	215/65R15	215/65R15	215/65R15	215/65R15
	Spare	Full-size	Full-size	Full-size	Full-size

WHAT'S NEW...**ALL MODELS**

- Passenger-side air bag (SRS)
- Addition of Automatic Locking Retractor (ALR) seatbelts to outboard passenger seats
- Air conditioning (CFC-free)
- Redesigned front bumper and spoiler
- Three new exterior colors
- New front seat design
- Adjustable front seat head restraints
- New steering wheel design
- New features: Glove box light, ashtray light, side door assist grip, third seat cup holder, key-in-ignition warning buzzer, back door strap for easy pull down
- New dealer/port installed options
 - Cellular mobile telephones (fixed/portable)

Capacities	Curb Weights (lbs.)	3555	3745	3765	3955
	Fuel Tank (gals.)	19.8	19.8	19.8	19.8
	Towing (lbs.)	3500	3500	3500	3500
Restraint Systems	Air Bag (SRS)	Driver- and passenger-side	Driver- and passenger-side	Driver- and passenger-side	Driver- and passenger-side
	Seatbelts front	Driver 3-pt. ^{2, 4} , Pass. 3-pt. ^{3, 4}	Driver 3-pt. ^{2, 4} , Pass. 3-pt. ^{3, 4}	Driver 3-pt. ^{2, 4} , Pass. 3-pt. ^{3, 4}	Driver 3-pt. ^{2, 4} , Pass. 3-pt. ^{3, 4}
	rear	Outboard 3-pt. ³ , Ctr. 2-pt. ⁵	Outboard 3-pt. ³ , Ctr. 2-pt. ^{5, 6}	Outboard 3-pt. ³ , Ctr. 2-pt. ⁵	Outboard 3-pt. ³ , Ctr. 2-pt. ^{5, 6}

EXTERIOR

Wheelbase	(in.)	112.8	112.8	112.8	112.8
Overall Length	(in.)	187.0	187.0	187.0	187.0
Overall Width	(in.)	70.8	70.8	70.8	70.8
Overall Height	(in.)	68.7	68.7 ⁷	69.1	69.1
Tread Width	front/rear (in.)	61.6 / 61.2	61.6 / 61.2	61.6 / 61.2	61.6 / 61.2
Drag Coefficient	(C _D)	.34	.34	.34	.34

INTERIOR

Seating Capacity		7	7	7	7
Head Room	front/mid/rear (in.)	39.4 / 38.9 / 37.8	39.4 / 38.9 / 37.8	39.4 / 38.9 / 37.8	39.4 / 38.9 / 37.8
Leg Room	front/mid/rear (in.)	40.1 / 36.6 / 36.3	40.1 / 36.6 / 36.3 ⁸	40.1 / 36.6 / 36.3	40.1 / 36.6 / 36.3 ⁸
Shoulder	front/mid/rear (in.)	61.1 / 61.6 / 60.6	61.1 / 61.6 / 60.6	61.1 / 61.6 / 60.6	61.1 / 61.6 / 60.6
Hip Room	front/mid/rear (in.)	56.9 / 64.4 / 57.4	56.9 / 64.4 / 57.4	56.9 / 64.4 / 57.4	56.9 / 64.4 / 57.4
Cargo	behind ft/md/rr (cu. ft.)	157.8 / 85.3 / 32.5	157.8 / 85.3 / 32.5	157.8 / 85.3 / 32.5	157.8 / 85.3 / 32.5

NA Feature not available

* Marketed as Twin-Cam

** Curb-to-curb

*** Power-Assisted

1 With rear brake Load-Sensing Proportioning Valve (LSPV)

2 Emergency Locking Retractor (ELR)

3 Emergency Locking Retractor (ELR)/Automatic Locking Retractor (ALR)

4 With adjustable shoulder belt anchor

5 2-pt. ELR/ALR lap belt in center position of second seat

6 3-pt. seatbelts with optional Captains Chairs (CC) on LE models

7 69.8 with optional dual sunroofs (SR)

8 37.2 with optional Captains Chairs (CC)

PREVIA DX

- Larger brakes
- Standard 15" wheels and tires: 215/65R15 All-season steel-belted radial tires
- Full-size spare tire
- All-new DX cloth seat trim
- Front variable intermittent windshield wipers
- Rear intermittent window wiper
- AM/FM ETR Radio with 6 speakers
- Deleted model: Previa DX 5M (5125)

PREVIA LE

- Adjustable head restraints on optional Captains Chairs (CC); adjusts tilt and height
- All-new LE cloth seat trim

		4WD SR5 (8657)	4WD SR5 V6 (8664/8665)	2WD SR5 V6 (8642)
MECHANICAL				
Engine	Type	2.4-L 4-Cyl SOHC 8-V EFI	3.0-L V-6 OHC 12-V EFI	3.0-L V-6 OHC 12-V EFI
	Horsepower (bhp @ rpm)	116 @ 4800	150 @ 4800	150 @ 4800
	Torque (lb-ft @ rpm)	140 @ 2800	180 @ 3400	180 @ 3400
	MPG (est. EPA city/hwy)	5M - 19/22	5M - 15/18 4ECT - 14/16	4ECT - 17/21
Drivetrain	Type	Front-engine / part-time 4-wheel drive	Front-engine / part-time 4-wheel drive	Front-engine / rear-wheel drive
Transmissions	(standard)	5-speed manual overdrive	5-speed manual overdrive	4-speed ECT automatic overdrive
	(optional)	NA	4-speed ECT automatic overdrive	NA
	Transfer Case	2-speed with 4WDemand	2-speed with 4WDemand	NA
	Differential Ratio	5M - 4.100:1	5M - 4.300:1 ¹ 4ECT - 4.556:1 ²	3.900:1
Suspension	front	Ind; Hi-Trac w/torsion and stabilizer bar ³	Ind; Hi-Trac w/torsion and stabilizer bar ³	Ind; Hi-Trac w/torsion and stabilizer bar ³
	rear	Solid axle; 4-link coil spring w/stab. bar ³	Solid axle; 4-link coil spring w/stab. bar ³	Solid axle; 4-link coil spring w/stab. bar ³
Steering	Type	Power-assisted recirculating-ball	Power-assisted recirculating-ball	Power-assisted recirculating-ball
	Ratio	21.5:1	21.5:1	21.5:1
	Turning Diameter* (ft.)	37.4	37.4	37.4
Brakes**	front/rear	Ventilated disc/drum with LSPV ⁴	Ventilated disc/drum with rear ABS and LSPV ⁴	Ventilated disc/drum with rear ABS and LSPV ⁴
	(optional)	Rear Anti-lock Brake System	4-Wheel Anti-lock Brake System	4-Wheel Anti-lock Brake System
Wheels	Type/Size (std/opt)	Steel / 7 x 15 / NA	Steel / 7 x 15 / Alloy / 7 x 15	Steel / 7 x 15 / Alloy / 7 x 15
Tires	Type	Mud-and-snow steel-belted radial	Mud-and-snow steel-belted radial	Mud-and-snow steel-belted radial
	Size (std/opt)	225/75R15 / NA	225/75R15 / 31" x 10.5"	225/75R15 / NA

WHAT'S NEW...**ALL MODELS**

- California/New York Emissions option (CA)
- Side-door beams
- Roof-mounted Center High-Mount Stop Lamp (CHMSL)
- New exterior colors: Sierra Beige Metallic (4M4), Evergreen Pearl (751), Glacier Blue Metallic (8J8)
- Deleted exterior color: Forest Green Metallic (6J7)
- Air conditioning (CFC-free)
- Addition of Automatic Locking Retractor (ALR) to outboard passenger seatbelt
- New dealer/port installed options
 - Aluminum alloy wheels
 - Cellular mobile telephones (fixed/portable)

Tires	Spare	Full-size	Full-size	Full-size
Capacities	Curb Weights (lbs.)	5M - 3825	5M - 4105 4ECT - 4165	4ECT - 3820
	Fuel Tank (gals.)	17.2	17.2 ⁵	17.2
	GVWR (lbs.)	5400	5400	5400
	Towing (lbs.)	3500	3500	3500
Restraint Systems	Seatbelts front	Driver 3-pt. ⁶ , Pass. 3-pt. ⁷	Driver 3-pt. ⁶ , Pass. 3-pt. ⁷	Driver 3-pt. ⁶ , Pass. 3-pt. ⁷
	rear	Outboard 3-pt. ⁷ , Center 2-pt. lap	Outboard 3-pt. ⁷ , Center 2-pt. lap	Outboard 3-pt. ⁷ , Center 2-pt. lap
EXTERIOR				
Wheelbase	(in.)	103.3	103.3	103.3
Overall Length	(in.)	176.0	176.0	176.0
Overall Width	(in.)	66.5	66.5 ⁸	66.5
Overall Height	(in.)	66.1	66.1 ⁹	66.1
Tread Width	front/rear (in.)	56.3 / 56.1	56.3 / 56.1 ¹⁰	56.3 / 56.1
Ground Clearance	(in.)	9.1	9.1 ¹¹	9.1
INTERIOR				
Seating Capacity		5	5	5
Head Room	front/rear (in.)	38.7 / —	38.7 / 38.3 ¹²	38.7 / 38.3 ¹²
Leg Room	front/rear (in.)	41.5 / 31.6	41.5 / 31.6	41.5 / 31.6
Shoulder Room	front/rear (in.)	53.9 / 53.9	53.9 / 53.9	53.9 / 53.9
Hip Room	front/rear (in.)	49.6 / 51.0	49.6 / 51.0	49.6 / 51.0
Cargo	seat up/down (cu. ft.)	43.5 / 78.3	43.5 / 78.3	43.5 / 78.3

NA Feature not available

— Information not available

* Curb-to-curb

** Power-Assisted

1 4.556 with 31" x 10.5" tire option

2 4.875 with 31" x 10.5" tire option

3 With gas-filled shock absorbers

4 With rear Load-Sensing Proportioning Valve (LSPV)

5 18.5 with 31" x 10.5" tire option

6 Emergency Locking Retractor (ELR)

7 Emergency Locking Retractor (ELR)/Automatic Locking Retractor (ALR)

8 68.1 with 31" x 10.5" tire option

9 67.3 with 31" x 10.5" tire option

10 58.1 / 57.9 with 31" x 10.5" tire option

11 10.2 with 31" x 10.5" tire option

12 37.9 / 36.6 with optional sunroof

SR5

- Deleted option: sunroof

SR5 V6

- Optional 4-wheel ABS
- New interior color
 - Oak (cloth or optional leather)
- Deleted interior color
 - Grey leather option

		WAGON (6154)
MECHANICAL		
Engine	Type	4.5-L I-6 DOHC* 24-V EFI
	Horsepower (bhp @ rpm)	212 @ 4600
	Torque (lb-ft @ rpm)	275 @ 3200
	MPG (est. EPA city/hwy)	12/15
Drivetrain	Type	Front-engine / full-time 4-wheel drive
Transmissions	(standard)	4-speed ECT automatic overdrive
	Transfer Case	2-speed with center lock (H/L) ¹
Suspension	front	Solid axle; coil spring with stabilizer bar
	rear	Solid axle; 4-link coil spring with stabilizer bar
Steering	Type	Power-assisted recirculating-ball
	Ratio	18.6:1
	Turning Diameter** (ft.)	40.4
Brakes***	front/rear	Ventilated disc/drum with rear LSPV ²
	(optional)	4-wheel ventilated disc with 4-wheel ABS
Wheels	Type/Size (std/opt)	Steel / 8 x 16 / Alloy / 8 x 16
Tires	Type	Mud-and-snow steel-belted radial
	Size	275/70R16
	Spare	Full-size

WHAT'S NEW...

- 50-State Emissions
- Air conditioning (CFC-free)
- New two-tone color combination: Two-Tone Red Metallic (26W)
- Standard Premium AM/FM ETR/Cassette with programmable equalizer, FM diversity antenna system and 9 speakers
- Addition of Automatic Locking Retractor (ALR) to outboard passenger seatbelts
- New dealer/port installed options
 - Cellular mobile telephones (fixed/portable)
 - Running boards

Capacities	Curb Weights (lbs.)	4760
	Fuel Tank (gals.)	25.1
	GVWR (lbs.)	6525
	Towing (lbs.)	5000
Restraint Systems	Seatbelts front	Driver 3-point ³ , Passenger 3-point ⁴
	rear	Outboard 3-point ⁴ , Center 2-point lap belt
EXTERIOR		
Wheelbase	(in.)	112.2
Overall Length	(in.)	188.2
Overall Width	(in.)	76.0
Overall Height	(in.)	73.2
Tread Width	front/rear (in.)	62.8 / 63.0
Ground Clearance	(in.)	10.8
INTERIOR		
Seating Capacity		5 / 8 ⁵
Head Room	front/rear (in.)	40.7 / 40.0 / 36.5 ⁵
Leg Room	front/rear (in.)	42.2 / 33.6 / 28.6 ⁵
Shoulder Room	front/rear (in.)	58.7 / 58.7 / 59.5 ⁵
Hip Room	front/rear (in.)	59.5 / 59.5 / 59.2 ⁵
Cargo	seat up/down (cu. ft.)	75.0 ⁶ / 91.1 ⁷

NA Feature not available

* Marketed as Twin-Cam

** Curb-to-curb

*** Power-Assisted

1 Optional Differential Locks (DL) includes viscous-coupling-type center differential

2 Rear Load-Sensing Proportioning Valve (LSPV)

3 Emergency Locking Retractor (ELR)

4 Emergency Locking Retractor (ELR)/Automatic Locking Retractor (ALR)

5 With optional Third Seat Package (TH)

6 With third seat option and middle bench seat (both folded)

7 Without third seat option and middle bench seat folded

		PASEO (1525/1526)
MECHANICAL		
Engine	Type	1.5-L 4-Cyl ¹ DOHC* 16-V EFI
	Horsepower (bhp @ rpm)	100 @ 6400
	Torque (lb-ft @ rpm)	91 @ 3200
	MPG (est. EPA city/hwy)	5M - 28/34 4ECT - 26/32
Drivetrain	Type	Front-wheel drive
Transmissions	(standard)	5-speed manual overdrive
	(optional)	4-speed ECT automatic overdrive
Suspension	front	Ind; MacPherson strut with stabilizer bar
	rear	Trailing torsion beam with stabilizer bar
Steering	Type	Power-assisted rack-and-pinion
	Ratio	15.3:1
	Turning Diameter** (ft.)	32.5
	Turns***	2.7
Brakes†	front/rear	Ventilated disc/drum
	(optional)	Anti-lock Brake System
Wheels	Type/Size	Steel / 5.5 x 14
	(optional)	Alloy / 5.5 x 14
Tires	Type	All-season steel-belted radial

WHAT'S NEW...**ALL MODELS**

- California/New York Emissions option (CA)
- Deleted exterior color: Blue Pearl (8J2)
- Addition of Automatic Locking Retractor (ALR) to outboard passenger seatbelts
- Air conditioning (CFC-free)
- New dealer/port installed options
 - Cargo net

Tires	Size	185/60R14
	Spare	Temporary
Capacities	Curb Weight (lbs.)	5M - 2070 4ECT - 2160
	Fuel Tank (gals.)	11.9
Restraint Systems	Air Bag (SRS)	Driver-side
	Seatbelts front	Driver 3-point ² , Passenger 2-point non-motorized shoulder belt ^{3, 4}
	rear	3-point ³
EXTERIOR		
Wheelbase	(in.)	93.7
Overall Length	(in.)	163.2
Overall Width	(in.)	65.2
Overall Height	(in.)	50.2
Tread Width	front/rear (in.)	55.3 / 54.9
Drag Coefficient	(C _D)	.32
INTERIOR		
Seating Capacity		4
Head Room	front/rear (in.)	37.7 / 32.0
Leg Room	front/rear (in.)	41.1 / 30.0
Shoulder Room	front/rear (in.)	53.6 / 52.4
Hip Room	front/rear (in.)	53.7 / 49.0
Trunk/Cargo	seat up (cu. ft.)	7.7

NA Feature not available

— Information not available

* Marketed as Twin-Cam

** Curb-to-curb

*** Lock-to-lock

† Power-Assisted

1 Cast iron engine block with aluminum alloy head

2 Emergency Locking Retractor (ELR)

3 Emergency Locking Retractor (ELR)/Automatic Locking Retractor (ALR)

4 With manual lap belt; pivoting shoulder belt anchor

		ST SPORT COUPE / LIFTBACK (2162/2165)/(2166/2167)	GT SPORT COUPE / LIFTBACK (2172/2175)/(2192/2195)
MECHANICAL			
Engine	Type	1.8-L 4-Cyl ¹ DOHC* 16-V EFI	2.2-L 4-Cyl ¹ DOHC* 16-V EFI
	Horsepower (bhp @ rpm)	110 @ 5600	135 @ 5400 (130 @ 5400-CAN/US)
	Torque (lb-ft @ rpm)	115 @ 2800	145 @ 4400
	MPG (est. EPA city/hwy)	5M - 27/34 4ECT - 26/32	5M - 22/28 4ECT - 21/29
Drivetrain	Type	Front-wheel drive	Front-wheel drive
Transmissions	(standard)	5-speed manual overdrive	5-speed manual overdrive
	(optional)	4-speed ECT automatic overdrive	4-speed ECT automatic overdrive
Suspension	front	Ind; MacPherson strut w/stab. bar, subframe and upper brace	Ind; MacPherson strut w/stab. bar, subframe and upper brace
	rear	Ind; Dual link MacPherson strut w/stab. bar and subframe	Ind; Dual link MacPherson strut w/stab. bar and subframe
Steering	Type	Variable-assist power rack-and-pinion	Variable-assist power rack-and-pinion
	Ratio	17.2:1	17.2:1
	Turning Diameter** (ft.)	34.2	34.2
	Turns***	2.9	2.9
Brakes†	front/rear	Ventilated disc/drum	Ventilated disc/solid rear disc
	(optional)	Anti-lock Brake System	Anti-lock Brake System
Wheels	Type/Size (standard)	Steel / 6.0 x 14	Steel / 6.5 x 15
	(optional)	Alloy / 6.0 x 14 ²	Alloy / 7.0 x 15

WHAT'S NEW...**ALL MODELS**

- All new design
- GT-S and All-Trac models discontinued
- Vibration damping steel
- Hydraulic engine mount
- Front and rear subframes
- Increased tread width
- Unique aero-style halogen headlamps with auto-off feature
- Deleted bodyside moldings
- Six new exterior colors
- Black and Black/Ivory interiors
- Optional tilt/slide glass sunroof
- Passenger-side air bag (SRS)
- Addition of Automatic Locking Retractor (ALR) to outboard passenger seatbelts
- Air conditioning (CFC-free)
- New dealer/port installed options
 - Cellular mobile telephones
 - Cargo net
 - ST aluminum alloy wheels

Tires	Type	All-season steel-belted radial	Speed-rated steel-belted radial
	Size	185/70R14 87S	205/55R15 87V
	Spare	Temporary	Temporary
Capacities	Curb Weights (lbs.)	5M - 2395/2415 4ECT - 2475/2495	5M - 2560/2580 4ECT - 2620/2640
	Fuel Tank (gals.)	15.9	15.9
Restraint Systems	Air Bag (SRS)	Driver- and passenger-side	Driver- and passenger-side
	Seatbelts	Driver, 3-point ³	Driver, 3-point ³
		Outboard passenger, 3-point ⁴	Outboard passenger, 3-point ⁴
EXTERIOR			
Wheelbase	(in.)	99.9	99.9
Overall Length	(in.)	177.0 / 174.0	177.0 / 174.0
Overall Width	(in.)	68.9	68.9
Overall Height	(in.)	51.0 / 50.8	51.0 / 50.8
Tread Width	front/rear (in.)	59.6 / 58.9	59.6 / 58.9
Drag Coefficient	(C _D)	.31 / .32	.31 / .32
INTERIOR			
Seating Capacity		4	4
Head Room	front/rear (in.)	38.3 / 34.9	38.3 / 34.9
Leg Room	front/rear (in.)	43.1 / 26.6	43.1 / 26.6
Shoulder Room	front/rear (in.)	52.4 / 49.9	52.4 / 49.9
Hip Room	front/rear (in.)	— / —	— / —
Trunk/Cargo	seat up/seat down (cu. ft.)	10.6 / 16.2	10.6 / 16.2

NA Feature not available
 — Information not available
 * Marketed as Twin-Cam
 ** Curb-to-curb
 *** Lock-to-lock
 † Power-assisted

1 Cast iron engine block with aluminum alloy head
 2 P/O/D/O accessory
 3 Emergency Locking Retractor (ELR)
 4 Emergency Locking Retractor (ELR)/Automatic Locking Retractor (ALR)

ST MODELS

- Coupe and liftback body styles available
- 1.8-liter 4-cyl. DOHC 16-valve EFI
- Standard 50-State Emissions
- Optional 4ECT automatic trans.
- Optional Anti-lock Brake System (ABS)
- Standard dual color-keyed power mirrors and door handles
- Optional rear spoiler (liftback only)
- ST logo deleted
- 4-way adjustable driver's seat
- Standard 50/50 split-folding rear seat
- Standard map light
- Optional power windows and door locks

GT MODELS

- California/New York Emissions (CA)
- Optional rear spoiler (liftback only)
- Deleted features: fog lamps, mud guards, standard rear spoiler
- Optional sport packages
- Optional leather trim package
- Standard power windows and door locks
- Standard rear intermittent wipers
- Standard Deluxe AM/FM ETR/Cassette with 6 speakers

		SUPRA (2396/2398/2393#/2394#)	SUPRA TURBO (2381/2383#/2387#)
MECHANICAL			
Engine	Type	3.0-L I-6 ¹ DOHC* 24-V EFI	3.0-L I-6 ¹ DOHC* 24-V Twin Sequential Turbocharged ²
	Horsepower (bhp @ rpm)	220 @ 5800	320 @ 5600
	Torque (lb-ft @ rpm)	210 @ 4800	315 @ 4000
	Power-to-Weight Ratio	14.6:1	10.7:1
	Turbo Boost Pressure (PSI)	NA	11.6 ³
	MPG (est. EPA city/hwy)	5M - 18/23 4ECT - 18/24	6M - 17/23 4ECTi - 19/23
Drivetrain	Type	Front-engine/rear-wheel drive	Front-engine/rear-wheel drive
Transmissions	(standard)	5-speed manual overdrive	6-speed manual overdrive and TRAC ⁴
	(optional)	4-speed ECT automatic ⁵ overdrive	4-speed ECTi auto ⁵ overdrive w/intelligence and TRAC ⁴
Suspension	Type	4-wheel ind. double-wishbone w/stabilizer bars ^{6, 7}	4-wheel ind. double-wishbone w/stabilizer bars ^{6, 7}
Steering	Type	Vehicle speed-sensing progressive power rack-and-pinion	Vehicle speed-sensing progressive power rack-and-pinion
	Ratio	17.5:1	17.5:1
	Turning Diameter** (ft.)	35.4	35.4
Brakes***	front/rear	4-wheel ventilated disc with ABS ⁸	4-wheel ventilated disc ⁹ with ABS ¹⁰
Wheels	Type/Size (front/rear)	Alloy / 8.0 x 16 / 9.0 x 16	Alloy / 8.0 x 17 / 9.5 x 17
Tires	Type	Speed-rated steel-belted performance radial	Speed-rated steel-belted performance radial
	Size (front/rear)	225/50ZR16 / 245/50ZR16	235/45ZR17 / 255/40ZR17
	Spare	Temporary	Temporary

WHAT'S NEW...

Supra is a complete carryover model from its introduction in 1993. The following information is in addition to the previous information available.

- California/New York Emissions option (CA)
- All outboard passenger seatbelts have Automatic Locking Retractors (ALR)
- Automatic air conditioning (CFC-free)
- Dealer/port installed options
 - Cellular mobile telephones (fixed/portable)

Capacities	Curb Weights (lbs.)	5M - 3215/3275 ¹¹ 4ECT - 3255/3315 ¹¹	6M - 3415/3475 ¹¹ 4ECTi - 3475/3485 ¹¹
	Fuel Tank (gals.)	18.5	18.5
Restraint Systems	Air Bag (SRS)	Driver- and passenger-side	Driver- and passenger-side
	Seatbelts	Driver 3-point ¹² , Outboard pass., 3-point ¹³	Driver, 3-point ¹² , Outboard pass., 3-point ¹³
Performance	0 - 60 mph (sec.)	6.8†	4.6•
	1/4 mile (sec @ mph)	15.2† @ —	13.1 @ 109•
	Braking, 60 - 0 mph (ft.)	150†	160•
	Skid pad (Lateral G)	0.94†	0.95•

EXTERIOR

Wheelbase	(in.)	100.4	100.4
Overall Length/Width/Height	(in.)	177.7 / 71.3 / 50.2	177.7 / 71.3 / 50.2
Tread Width	front/rear (in.)	59.9 / 60.1	59.9 / 60.1
Drag Coefficient	(C _D)	0.31	0.32 ¹⁴

INTERIOR

Seating Capacity		4	4
Head Room	front/rear (in.)	37.5 ¹⁵ / 32.9	37.5 ¹⁵ / 32.9
Leg Room	front/rear (in.)	42.2 / 23.8	42.2 / 23.8
Shoulder Room	front/rear (in.)	54.2 / 43.8	54.2 / 43.8
Hip Room	front/rear (in.)	56.8 / 41.6	56.8 / 41.6
Trunk/Cargo	seat up/down (cu. ft.)	10.1 / —	10.1 / —

NA Feature not available
— Information not available

Sport Roof model
* Marketed as Twin-Cam
** Curb-to-curb
*** Power-Assisted
† Toyota test engineer data
◆ Car & Driver Road Test, 3/93

1 Cast iron engine block with aluminum alloy head
2 With intercooler and EFI
3 Combined boost pressure with both turbos operating
4 Includes Traction Control (TRAC)
5 Includes manual shift mode
6 Hollow stabilizers and aluminum alloy upper A-arms for less weight

7 With front subframe made of aluminum alloy for less weight
8 4-wheel, 4-channel ABS with G-sensor; and twin-piston front/single-piston rear brake calipers
9 Front spiral vents/rear straight vents
10 4-wheel, 4-channel ABS with G-sensor; and 4-piston front/twin-piston rear brake calipers
11 With sport roof

12 Emergency Locking Retractor (ELR)
13 Emergency Locking Retractor (ELR)/Automatic Locking Retractor (ALR)
14 0.33 with optional rear spoiler
15 37.3 with sport roof

		STANDARD BED STD (8100)	STANDARD BED DX (8104/8113)	XTRACAB DX (8116/8123)	XTRACAB DX V6/SR5 V6 (8153/8154)/(8157/8158)
MECHANICAL					
Engine	Type	2.4-L 4-Cyl SOHC 8-V EFI	2.4-L 4-Cyl SOHC 8-V EFI	2.4-L 4-Cyl SOHC 8-V EFI	3.0-L V6 OHC 12-V EFI ¹
	Horsepower (bhp @ rpm)	116 @ 4800	116 @ 4800	116 @ 4800	150 @ 4800
	Torque (lb-ft @ rpm)	140 @ 2800	140 @ 2800	140 @ 2800	180 @ 3400
	MPG (est. EPA city/hwy)	5M - 23/28	5M - 23/28 4A - 22/25	5M - 23/28 4A - 22/25	5M - 16/21 4ECT - 18/23
Drivetrain	Type	Front-engine/rear-wheel drive	Front-engine/rear-wheel drive	Front-engine/rear-wheel drive	Front-engine/rear-wheel drive
Transmissions	(standard)	5-speed manual overdrive	5-speed manual overdrive	5-speed manual overdrive	5-speed manual overdrive
	(optional)	NA	4-speed auto overdrive ²	4-speed auto overdrive ²	4-speed ECT auto overdrive
	Differential Ratio	5M - 3.583:1	5M - 3.583:1 4A - 3.727:1	5M - 3.583:1 4A - 3.727:1	5M - 3.417:1 4ECT - 3.417:1
Suspension	front	Ind; torsion bar w/stab. bar	Ind; torsion bar w/stab. bar	Ind; torsion bar w/stab. bar	Ind; torsion bar w/stab. bar
	rear	Solid axle; leaf spring	Solid axle; leaf spring	Solid axle; leaf spring	Solid axle; leaf spring
Steering	Type (standard)	Recirculating-ball ³	Recirculating-ball ³	Recirculating-ball ³	Power-asstd. recirculating-ball
	Ratio (std/opt)	22.9:1 / 19.5:1	22.9:1 / 19.5:1	22.9:1 / 19.5:1	19.5:1 / NA
	Turning Diameter* (ft.)	35.4	35.4	41.3	41.3
Brakes**	front/rear	Ventilated disc/drum w/LSPV ⁴	Ventilated disc/drum w/LSPV ⁴	Ventilated disc/drum w/LSPV ⁴	Ventilated disc/drum w/LSPV ⁴
	(optional)	Rear Anti-lock Brake System	Rear Anti-lock Brake System	Rear Anti-lock Brake System	Rear Anti-lock Brake System ⁵
Wheels	Type/Size	Steel / 5 x 14	Steel / 5 x 14	Steel / 6 x 14	Steel / 6 x 14
Tires	Type	All-season steel-belted radial	All-season steel-belted radial	All-season steel-belted radial	All-season steel-belted radial
	Size	195/75R14	195/75R14	205/75R14	205/75R14

WHAT'S NEW...

ALL MODELS

- Roof-mounted Center High-Mount Stop Lamp (CHMSL)
- Four inner tie-down hooks in cargo bed instead of six
- New color: Evergreen Pearl (751)
- New design for sport stripes in the Extra Value Packages
- Addition of Automatic Locking Retractor (ALR) to outboard passenger seatbelt
- Side-door beams
- Revised curb weights and payload ratings
- New dealer/port installed options:
 - Cellular mobile telephones (fixed/portable)

Tires	Spare	Full-size	Full-size	Full-size	Full-size
Capacities	Curb Weights (lbs.)	5M - 2690	5M - 2730 4A - 2750	5M - 2970 4A - 2990	5M-3095 / 3120 4ECT-3160 / 3135
	Fuel Tank (gals.)	13.7	13.7	17.2	17.2
	GVWR (lbs.)	4400	4550	4550	4600
	Towing (lbs.)	5M - 3500	5M - 3500 4A - 2000 ⁶	5M - 3500 4A - 2000 ⁶	5M - 3500 4ECT - 2000 ⁶
	Payload (lbs.)***	5M - 1710	5M - 1820 4A - 1800	5M - 1580 4A - 1560	5M-1505/1480 4ECT-1440/1465
Restraint System	Seatbelts	Driver 3-pt. ⁷ , Pass. 3-pt. ⁸	Driver 3-pt. ⁷ , Pass. 3-pt. ⁸	Driver 3-pt. ⁷ , Pass. 3-pt. ⁸	Driver 3-pt. ⁷ , Pass. 3-pt. ⁸

EXTERIOR

Wheelbase	(in.)	103.0	103.0	121.9	121.9
Overall Length	(in.)	174.6	174.6	193.1	193.1
Overall Width	(in.)	66.5	66.5	66.5	66.5
Overall Height	(in.)	60.8	60.8	61.0	61.0
Cargo Bed	length/width/height (in.)	75.0/59.7 ⁹ /15.9	75.0/59.7 ⁹ /15.9	75.0/59.7 ⁹ /15.9	75.0/59.7 ⁹ /15.9
Tread Width	front/rear (in.)	53.3/53.9	53.3/53.9	53.9/54.3	53.9/54.3
Ground Clearance	(in.)	7.5	7.5	6.7	6.7

INTERIOR

Seating Capacity		3	3	2/5 ¹⁰	2/5 ¹⁰ / 5/4 ¹¹
Head Room	front/rear (in.)	38.3/NA	38.3/NA	38.6/34.7 ¹²	38.6/34.7 ¹² / 38.6/34.7
Leg Room	front/rear (in.)	41.5/NA	41.5/NA	43.7/—	43.7/—
Shoulder Room	front/rear (in.)	55.4/NA	54.8/NA	54.8/55.7 ¹²	54.8/55.7 ¹² / 53.9/55.7
Hip Room	front/rear (in.)	54.5/NA	54.3/NA	54.5/53.2 ¹²	54.5/53.2 ¹² / 54.1/53.4

NA Feature not available

— Information not available

* Curb-to-curb

** Power-Assisted

*** Includes occupants, equipment and cargo

1 Includes hydraulic timing-belt auto tensioner (all V6 models) and engine oil cooler (4ECT V6 only)

2 ECT not available on 4-cylinder models

3 Power-assisted optional

4 With rear Load-Sensing Proportioning Valve (LSPV)

5 Rear ABS standard on SR5 V6

6 3500 with optional towing accessories

7 Emergency Locking Retractor (ELR)

8 Outboard passenger has Emergency Locking Retractor (ELR)/Automatic Locking Retractor (ALR); center passenger has 2-point lap belt

9 Wall-to-wall

10 With optional 60/40 split bench seat and rear jump seats

11 With optional Sport Package (SX) bucket seats

12 With optional rear jump seats

XTRACAB DX V6/SR5 V6

- Engine oil cooler only on automatic transmission models

MODEL CHANGES

- Long Bed DX models discontinued (8114/8135)
- Cab Chassis 112" models discontinued (8975/8976)
- Cab Chassis 137" models discontinued (8981/8982)

		STANDARD BED DX / DX V6 (8503/8504)/(8513)	XTRACAB DX (8523/8524)	XTRACAB DX V6 (8553/8554)	XTRACAB SR5 V6 (8557/8558)
MECHANICAL					
Engine	Type	2.4-L 4-Cyl SOHC 8-V EFI/ 3.0-L V6 OHC 12-V EFI ¹	2.4-L 4-Cyl SOHC 8-V EFI	3.0-L V6 OHC 12-V EFI ¹	3.0-L V6 OHC 12-V EFI ¹
	Horsepower (bhp @ rpm)	116 @ 4800 / 150 @ 4800	116 @ 4800	150 @ 4800	150 @ 4800
	Torque (lb-ft @ rpm)	140 @ 2800 / 180 @ 3400	140 @ 2800	180 @ 3400	180 @ 3400
	MPG (est. EPA city/hwy)	5M-19/22 4ECT-18/19 / 5M-15/18	5M-19/22 4ECT-18/19	5M-15/18 4ECT-13/17	5M-15/18 4ECT-13/17
Drivetrain	Type	Front-engine / part-time 4WD	Front-engine / part-time 4WD	Front-engine / part-time 4WD	Front-engine / part-time 4WD
Transmissions	(standard)	5-speed manual overdrive	5-speed manual overdrive	5-speed manual overdrive	5-speed manual overdrive
	(optional)	4-speed ECT auto overdrive ²	4-speed ECT auto overdrive	4-speed ECT auto overdrive	4-speed ECT auto overdrive
	Transfer Case	2-speed w/man. locking hubs ³	2-speed w/man. locking hubs	2-speed w/man. locking hubs ⁴	2-speed w/4WDemand
Suspension	front	Ind; Hi-trac w/torsion and stab. bar ⁵	Ind; Hi-trac w/torsion and stab. bar	Ind; Hi-trac w/torsion and stab. bar ⁵	Ind; Hi-trac w/torsion and stab. bar ⁵
	rear	Solid axle; leaf spring ⁵	Solid axle; leaf spring	Solid axle; leaf spring ⁵	Solid axle; leaf spring ⁵
Steering	Type	Recirculating-ball ⁶	Recirculating-ball	Power-asstd. recirculating-ball	Power-asstd. recirculating-ball
	Steering Ratio	26.2 - 29.9:1 / 21.5:1	26.2 - 29.9:1 / 21.5:1	21.5:1 / NA	21.5:1 / NA
	Turning Diameter* (ft.)	37.4	43.3	43.3	43.3
Brakes**	front/rear	Vent. disc/drum w/LSPV ⁷	Vent. disc/drum w/LSPV ⁷	Vent. disc/drum w/LSPV ⁷	Vent. disc/drum w/rear ABS/ LSPV ⁷
	(optional)	Rear Anti-lock Brake System	Rear Anti-lock Brake System	Rear Anti-lock Brake System	NA
Wheels	Type/Size (std/opt)	Steel / 6 x 15 / V6 opt.- Steel / 7 x 15	Steel / 6 x 15 / NA	Steel / 6 x 15 / Steel / 7 x 15	Steel / 6 x 15 / Alloy / 7 x 15

WHAT'S NEW...

ALL MODELS

- Roof-mounted Center High-Mount Stop Lamp (CHMSL)
- Four inner tie-down hooks in cargo bed instead of six
- New exterior color: Evergreen Pearl (751)
- Addition of Automatic Locking Retractor (ALR) to outboard passenger seatbelt
- Side-door beams
- Revised curb weights and payload ratings
- New dealer/port installed options
 - Cellular mobile telephones (fixed/portable)

Tires	Type (standard)	Mud-and-snow steel-belted radial	Mud-and-snow steel-belted radial	Mud-and-snow steel-belted radial	Mud-and-snow steel-belted radial
	Size (std/opt)	225/75R15 / V6 opt. - 31" x 10.5"	225/75R15 / NA	225/75R15 / 31" x 10.5"	225/75R15 / 31" x 10.5"
Tires	Spare	Full-size	Full-size	Full-size	Full-size
Capacities	Curb Weights (lbs.)	5M-3345 4ECT-3400 / 5M-3575	5M-3540 4ECT-3585	5M-3775 4ECT-3840	5M-3815 4ECT-3880
	Fuel Tank (gals.)	17.2	19.3	19.3	19.3
	GVWR (lbs.)	5400	5400	5350	5400
	Towing (lbs.)	3500 ⁸	3500 ⁸	3500 ⁸	3500 ⁸
	Payload (lbs.)***	5M-2055 4ECT-2000 / 5M-1825	5M-1860 4ECT-1815	5M-1625 4ECT-1560	5M-1585 4ECT-1520
Restraint Systems	Seatbelts	Driver 3-pt. ⁹ , Pass. 3-pt. ¹⁰	Driver 3-pt. ⁹ , Pass. 3-pt. ¹⁰	Driver 3-pt. ⁹ , Pass. 3-pt. ¹⁰	Driver 3-pt. ⁹ , Pass. 3-pt. ¹⁰

EXTERIOR

Wheelbase	(in.)	103.0	121.9	121.9	121.9
Overall Length	(in.)	174.4	193.1	193.1	193.1
Overall Width	(in.)	66.5	66.5	66.5	66.5
Overall Height	(in.)	67.1 / 68.5 ¹¹	67.3	67.3 / 68.7 ¹¹	67.3 / 68.7 ¹¹
Cargo Bed	length/width/height (in.)	75.0 / 59.7 ¹² / 15.9	75.0 / 59.7 ¹² / 15.9	75.0 / 59.7 ¹² / 15.9	75.0 / 59.7 ¹² / 15.9
Tread Width	front/rear (in.)	56.3 / 56.1 / 58.1 / 57.9 ¹¹	56.3 / 56.1	56.3 / 56.1 / 58.1 / 57.9 ¹¹	56.3 / 56.1 / 58.1 / 57.9 ¹¹
Ground Clearance	(in.)	9.1 / 10.2 ¹¹	9.7	9.7 / 10.8 ¹¹	9.7 / 10.8 ¹¹

INTERIOR

Seating Capacity		3	2 / 5 ¹³	2 / 5 ¹³	5 / 4 ¹⁴
Head Room	front/rear (in.)	38.3 / NA	38.6 / 34.7 ¹³	38.6 / 34.7 ¹³	38.6 / 34.7 ^{13, 14}
Leg Room	front/rear (in.)	41.5 / NA	43.7 / —	43.7 / —	43.7 / —
Shoulder Room	front/rear (in.)	54.8 / NA	54.8 / 55.7 ¹³	54.8 / 55.7 ¹³	53.9 / 55.7 ^{13, 14}
Hip Room	front/rear (in.)	54.3 / NA	54.5 / 53.4 ¹³	54.5 / 53.4 ¹³	54.1 / 53.4 ^{13, 14}

NA Feature not available
 — Information not available
 * Curb-to-curb
 ** Power-Assisted
 *** Includes occupants, equipment and cargo

1 With hydraulic timing-belt auto tensioner (all V6 models) and engine oil cooler (5M V6 only)
 2 Not available on V6 model
 3 4WDemand available on 5M/V6 model
 4 4WDemand available
 5 Includes gas-filled shock absorbers on V6 models

6 Standard power-assist on V6 model
 7 With rear Load-Sensing Proportioning Valve (LSPV)
 8 Requires Class II Hitch
 9 With Emergency Locking Retractor (ELR)
 10 Outboard passenger has Emergency Locking Retractor (ELR)/Automatic Locking Retractor (ALR); center passenger has 2-point lap belt

11 With optional 31" x 10.5" tires
 12 Wall-to-wall
 13 With 60/40 split bench seat and rear jump seats
 14 With optional sport seats and rear jump seats

DX AND XTRACAB DX

- 4WDemand no longer available on 4-cylinder models
- Engine oil cooler only on V6 models with manual transmission
- New design for sport stripes in the Extra Value Packages

SR5 V6

- New color for sport stripes on white or black SR5 V6 models: Teal Green
- Engine oil cooler only on V6 models with manual transmission

MODEL CHANGES

- Standard Bed DX (5M with 4WDemand) discontinued (8515)
- Xtracab DX (5M with 4WDemand) discontinued (8525)

		T100 4X2 STANDARD (8711)	T100 4X2 DX (8712/8713)	T100 4X2 SR5 (8714/8715)	T100 4X2 ONE TON DX (8716/8717)
MECHANICAL					
Engine	Type	2.7-L 4-Cyl. DOHC* 16-V EFI	3.0-L V6 OHC 12-V EFI ¹	3.0-L V6 OHC 12-V EFI ¹	3.0-L V6 OHC 12-V EFI ¹
	Horsepower (bhp @ rpm)	150 @ 4000	150 @ 4800	150 @ 4800	150 @ 4800
	Torque (lb-ft @ rpm)	177 @ 4000	180 @ 3400	180 @ 3400	180 @ 3400
	MPG (est. EPA city/hwy)	5M - 21/25	5M - 16/21 4ECT - 16/20	5M - 16/21 4ECT - 16/20	5M - 16/21 4ECT - 16/20
Drivetrain	Type	Front-engine/rear-wheel drive	Front-engine/rear-wheel drive	Front-engine/rear-wheel drive	Front-engine/rear-wheel drive
Transmissions	(standard)	5-speed manual overdrive	5-speed manual overdrive	5-speed manual overdrive	5-speed manual overdrive
	(optional)	NA	4-speed ECT auto overdrive	4-speed ECT auto overdrive	4-speed ECT auto overdrive
	Differential Ratio	5M - 3.615	5M - 4.083 4ECT - 4.272	5M - 4.083 4ECT - 4.272	5M - 4.454 4ECT - 4.700
Suspension	front	Ind; torsion bar w/stab. bar	Ind; torsion bar w/stab. bar	Ind; torsion bar w/stab. bar	Ind; torsion bar w/stab. bar
	rear	Solid axle; leaf spring	Solid axle; leaf spring	Solid axle; leaf spring	Solid axle; leaf spring
Steering	Type	Power-assisted rack-and-pinion	Power-assisted rack-and-pinion	Power-assisted rack-and-pinion	Power-assisted rack-and-pinion
	Ratio	20.3:1	20.3:1	20.3:1	20.3:1
	Turning Diameter** (ft.)	37.8	37.8	37.8	37.8
Brakes***	front/rear (standard)	Vent. disc/drum with LSPV ²	Vent. disc/drum with LSPV ²	Vent. disc/drum w/ rear ABS/LSPV ²	Vent. disc/drum w/LSPV ²
	(optional)	Rear Anti-lock Brake System	Rear Anti-lock Brake System	NA	Rear Anti-lock Brake System
Wheels	Type/Size (std/opt)	Steel / 6 x 15 / NA	Steel / 6 x 15 / NA	Steel / 6 x 15 / Alloy / 6 x 15	Steel / 6 x 15 / NA
Tires	Type (standard)	All-season steel-belted radial	All-season steel-belted radial	All-season steel-belted radial	All-season steel-belted radial
	Size (std/opt)	215/75R15 / 235/75R15	215/75R15 / 235/75R15	235/75R15 / NA	235/75R15 / NA

WHAT'S NEW...**ALL MODELS**

- Rear Center High-Mount Stop Lamp (CHMSL)
- Four cargo bed tie-down hooks instead of six
- Side-door beams
- Driver-side air bag Supplemental Restraint System (SRS)
- Addition of Automatic Locking Retractor (ALR) to outboard passenger seatbelt

T100 STANDARD

- New trim level: T100 Standard
- 2.7-liter 4-cylinder DOHC 16-V EFI engine standard on new T100 Standard
- 50-State Emissions standard on T100 Standard only

Tires	Spare	Full-size	Full-size	Full-size	Full-size
Capacities	Curb Weights (lbs.)	5M - 3320	5M - 3400 4ECT - 3430	5M - 3450 4ECT - 3480	5M - 3490 4ECT - 3520
	Fuel Tank (gals.)	24.0	24.0	24.0	24.0
	GVWR (lbs.)	5000	5000	5000	6000
	Towing (lbs.)	4000	5000	5000	5000
	Payload (lbs.)†	5M - 1680	5M - 1600 4ECT - 1570	5M - 1550 4ECT - 1520	5M - 2510 4ECT - 2480
Restraint Systems	Air Bag (SRS)	Driver-side	Driver-side	Driver-side	Driver-side
	Seatbelts	Driver 3-pt. ^{3,5} , Pass. 3-pt. ^{4,5}	Driver 3-pt. ^{3,5} , Pass. 3-pt. ^{4,5}	Driver 3-pt. ^{3,5} , Pass. 3-pt. ^{4,5}	Driver 3-pt. ^{3,5} , Pass. 3-pt. ^{4,5}

EXTERIOR

Wheelbase	(in.)	121.8	121.8	121.8	121.8
Overall Length	(in.)	209.1	209.1	209.1	209.1
Overall Width	(in.)	75.2	75.2	75.2	75.2
Overall Height	(in.)	66.7	66.7	66.7	66.7
Cargo Bed	length/width (in.)	97.8 / 49.2 ⁶	97.8 / 49.2 ⁶	97.8 / 49.2 ⁶	97.8 / 49.2 ⁶
Tread Width	front/rear (in.)	61.6 / 63.6	61.6 / 63.6	61.6 / 63.6	61.8 / 64.0
Ground Clearance	(in.)	7.7	7.7	7.7	8.1

INTERIOR

Seating Capacity		3	3	3	3
Head Room	(in.)	39.6	39.6	39.6	39.6
Leg Room	(in.)	42.4	42.4	42.4	42.4
Shoulder Room	(in.)	62.4	62.4	62.4	62.4
Hip Room	(in.)	59.4	59.4	59.4	59.4

NA Feature not available

* Marketed as Twin-Cam

** Curb-to-curb

*** Power-Assisted

† Includes occupants, equipment and cargo

1 Includes engine oil cooler and hydraulic timing-belt auto tensioner

2 With rear Load-Sensing Proportioning Valve (LSPV)

3 Emergency Locking Retractor (ELR)

4 Outboard passenger has Emergency Locking Retractor (ELR)/Automatic Locking Retractor (ALR); center passenger has 2-point lap belt only

5 With adjustable shoulder belt anchor for driver and outboard passenger

6 Well-to-well

DX

- Rear-wheel Anti-lock Brake System (ABS) now optional on T100 DX

DX AND SR5

- New colors: Tropical Blue Metallic (8B6), Two-Tone Green Metallic (751/6M3), Two-Tone Silver Metallic (196/202)
- Deleted color: Nordic Blue Metallic

		T100 4X4 DX (8812/8813)	T100 4X4 SR5 (8814/8815)
MECHANICAL			
Engine	Type	3.0-L V-6 OHC 12-V EFI ¹	3.0-L V-6 OHC 12-V EFI ¹
	Horsepower (bhp @ rpm)	150 @ 4800	150 @ 4800
	Torque (lb-ft @ rpm)	180 @ 3400	180 @ 3400
	MPG (est. EPA city/hwy)	5M - 15/18 4ECT - 14/17	5M - 15/18 4ECT - 14/17
Drivetrain	Type	Front-engine / part-time 4-wheel drive	Front-engine / part-time 4-wheel drive
Transmissions	(standard)	5-speed manual overdrive	5-speed manual overdrive
	(optional)	4-speed ECT automatic overdrive	4-speed ECT automatic overdrive
	Transfer Case	2-speed with 4WDemand	2-speed with 4WDemand
Suspension	front	Ind; Hi-Trac w/torsion bar and stabilizer bar	Ind; Hi-Trac w/torsion bar and stabilizer bar
	rear	Solid axle; leaf spring	Solid axle; leaf spring
Steering	Type	Power-assisted recirculating-ball	Power-assisted recirculating-ball
	Ratio	19.0:1	19.0:1
	Turning Diameter* (ft.)	43.2	43.2
Brakes**	front/rear (standard)	Ventilated disc/drum with LSPV ²	Ventilated disc/drum with LSPV ² and rear ABS
	(optional)	Rear Anti-lock Brake System	NA
Wheels	Type/Size (std/opt)	Steel / 6 x 15 / NA	Steel / 6 x 15 / Alloy / 7 x 15
Tires	Type	Mud-and-snow steel-belted radial	Mud-and-snow steel-belted radial
	Size (std/opt)	235/75R15 / 31" x 10.5"	235/75R15 / 31" x 10.5"

WHAT'S NEW...**ALL MODELS**

- Rear Center High-Mount Stop Lamp (CHMSL)
- Four cargo bed tie-down hooks instead of six
- Side-door beams
- Driver-side air bag Supplemental Restraint System (SRS)
- Addition of Automatic Locking Retractor (ALR) to outboard passenger seatbelt

DX

- Rear-wheel Anti-lock Brake System (ABS) now optional on T100 DX

Tires	Spare	Full-size	Full-size
Capacities	Curb Weights (lbs.)	5M - 3875	4ECT - 3945
	Fuel Tank (gals.)	24.0	
	GVWR (lbs.)	5500	
	Towing (lbs.)	4500	
Restraint Systems	Air Bag (SRS)	Driver-side	
	Seatbelts	Driver 3-point ^{3, 5} , Passenger 3-point ^{4, 5}	
EXTERIOR			
Wheelbase	(in.)	121.8	
Overall Length	(in.)	209.1	
Overall Width	(in.)	75.2	
Overall Height	(in.)	70.1 ⁶	
Cargo Bed	length/width (in.)	97.8 / 49.2 ⁷	
Tread Width	front/rear (in.)	63.2 / 63.6 ⁸	
Ground Clearance	(in.)	8.3 ⁹	
INTERIOR			
Seating Capacity		3	
Head Room	front/rear (in.)	39.6	
Leg Room	front/rear (in.)	42.4	
Shoulder Room	front/rear (in.)	62.4	
Hip Room	front/rear (in.)	59.4	

NA Feature not available

* Curb-to-curb

** Power-Assisted

1 Includes engine oil cooler and hydraulic timing-belt auto tensioner

2 With rear Load-Sensing Proportioning Valve (LSPV)

3 Emergency Locking Retractor (ELR)

4 Outboard passenger has Emergency Locking Retractor (ELR)/Automatic Locking Retractor (ALR); center passenger has 2-point lap belt only

5 With adjustable shoulder belt anchor for driver and outboard passenger

DX AND SR5

- New colors: Tropical Blue Metallic (8B6), Two-Tone Green Metallic (751/6M3), Two-Tone Silver Metallic (196/202)
- Deleted color: Nordic Blue Metallic

6 71.1 with 31" x 10.5" tire option

7 Well-to-well

8 65.0/65.4 with 31" x 10.5" tire option

9 9.3 with 31" x 10.5" tire option

NOTES



All Toyota product information included in this Pocket Resource is based on information available at the time of printing and is subject to change without notice. 9/93

FOR SALESPERSON USE ONLY

M/N 00623-94002-SET