

**DODGE
BUILDS
TOUGH
PANEL/WAGON
TRUCKS**




DODGE TOWN PANEL & WAGON

If you'd like to find out how tough a truck can be, talk to the people who buy Dodge Town Panels or Town Wagons. They'll tell you how rugged construction, high ground clearance, and a very maneuverable 114" wheelbase get these hardies into places that stop other panels cold. Both the Town Panel and Town Wagon have a flat 7½-foot cargo floor that loads easily through double rear doors and a step-type rear bumper. Both are powered by a durable 140 hp Slant Six or optional 200 hp V8, with a wide choice of transmissions. And both can carry close to a ¾-ton cargo load (or 6 or 8 passengers in the Wagon).




D100 Town Panel and Town Wagon on 114" wheelbase.

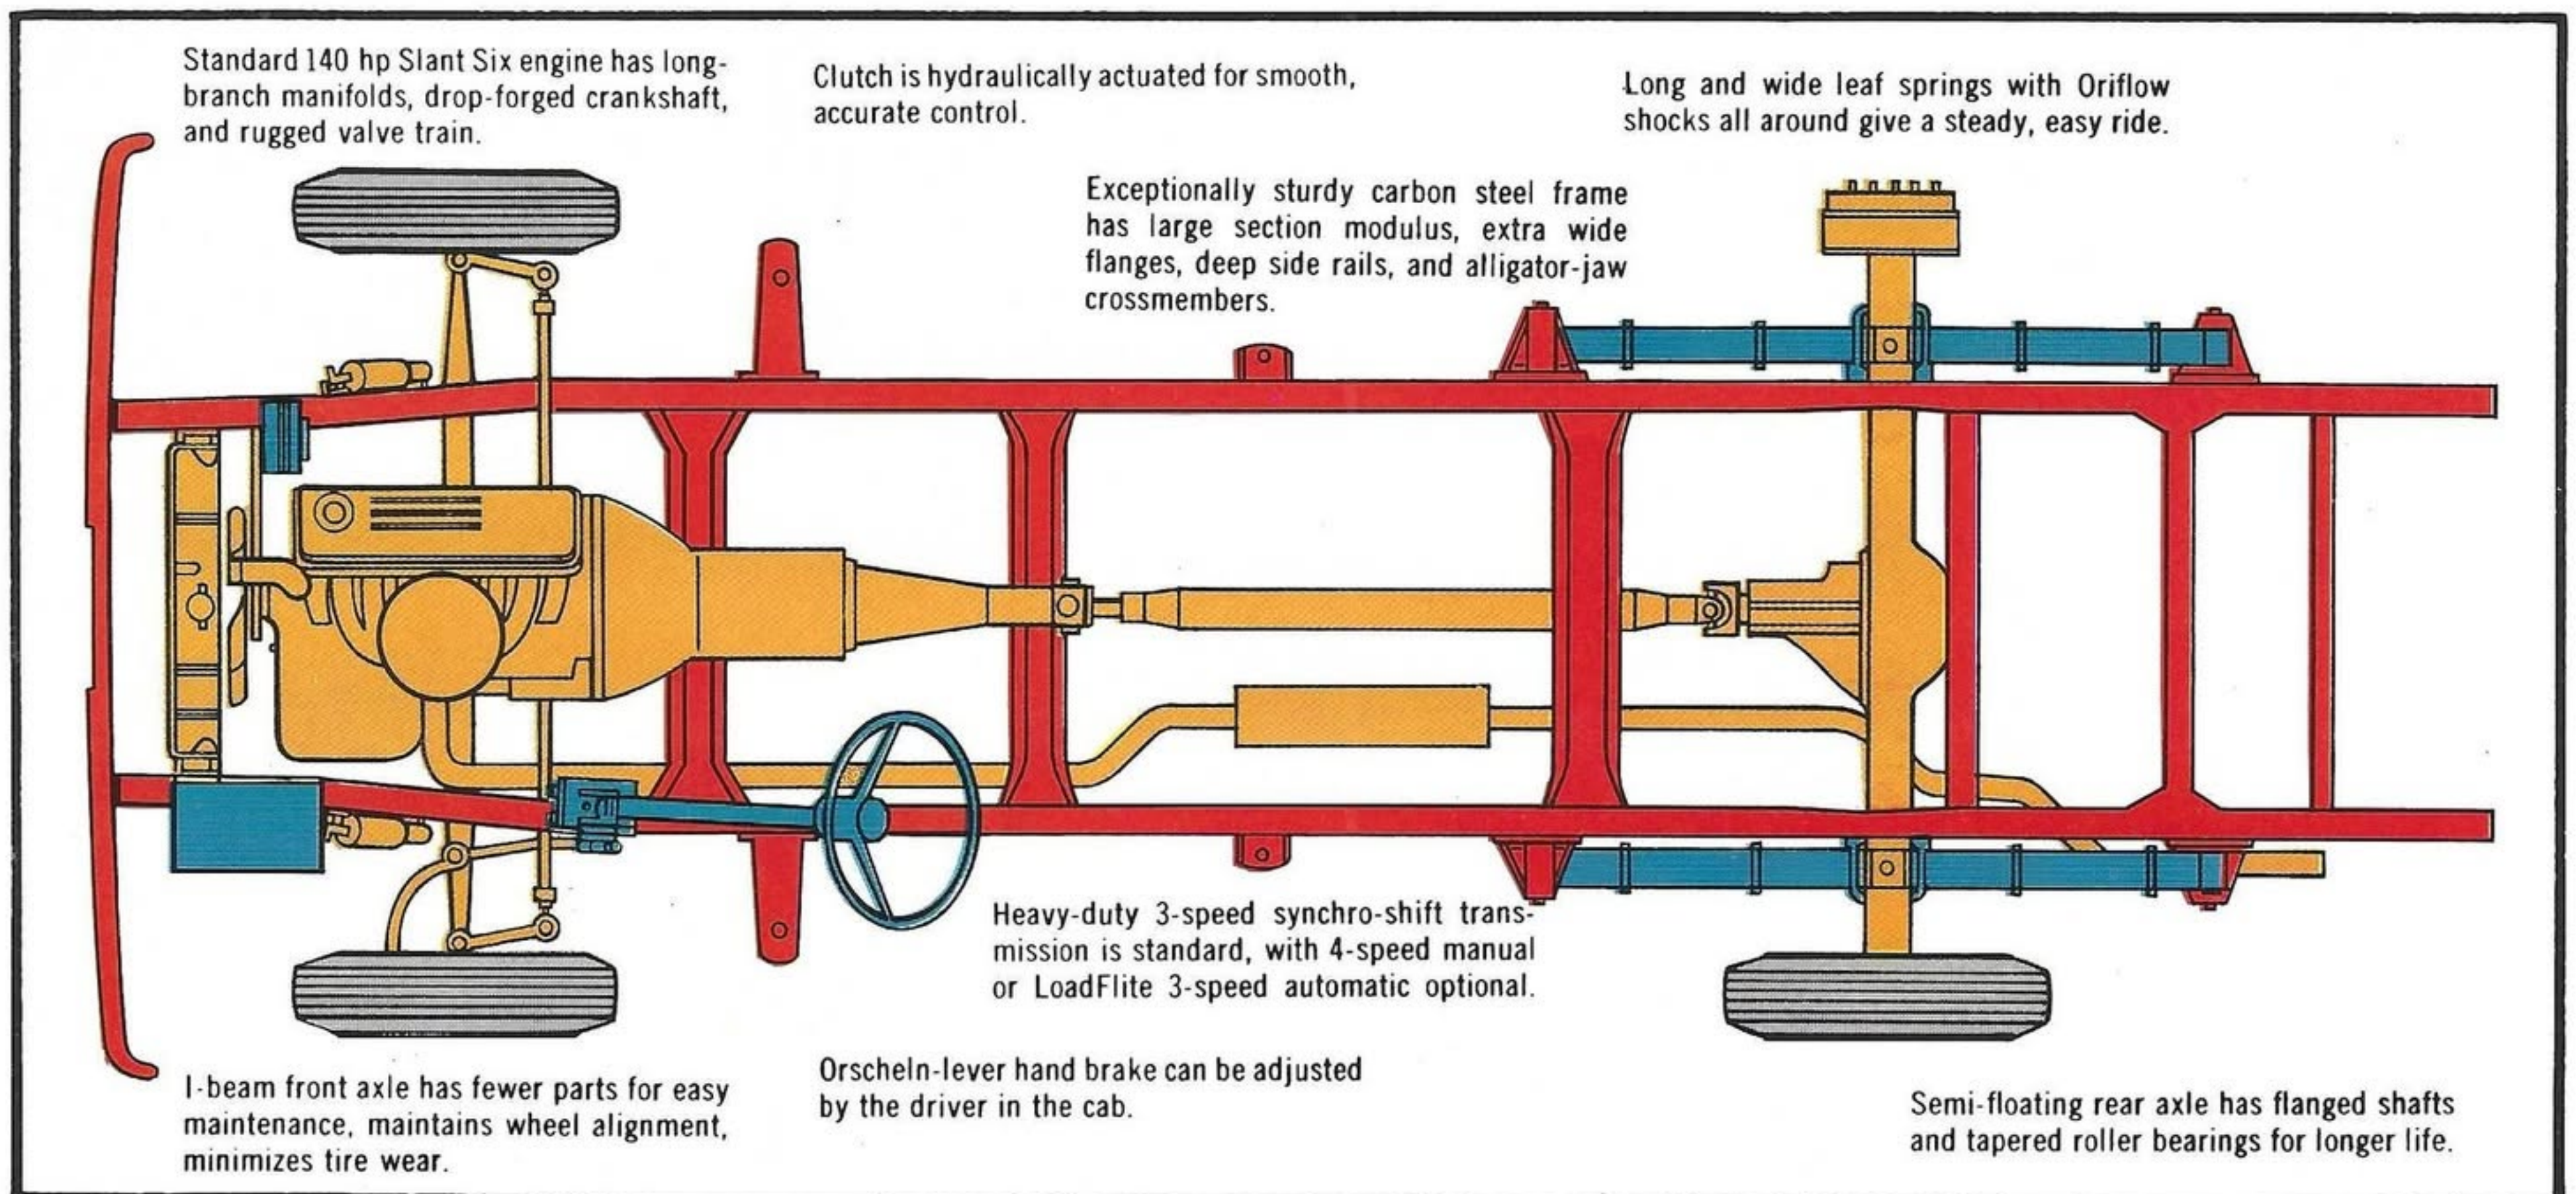


SPECIFICATIONS

D100

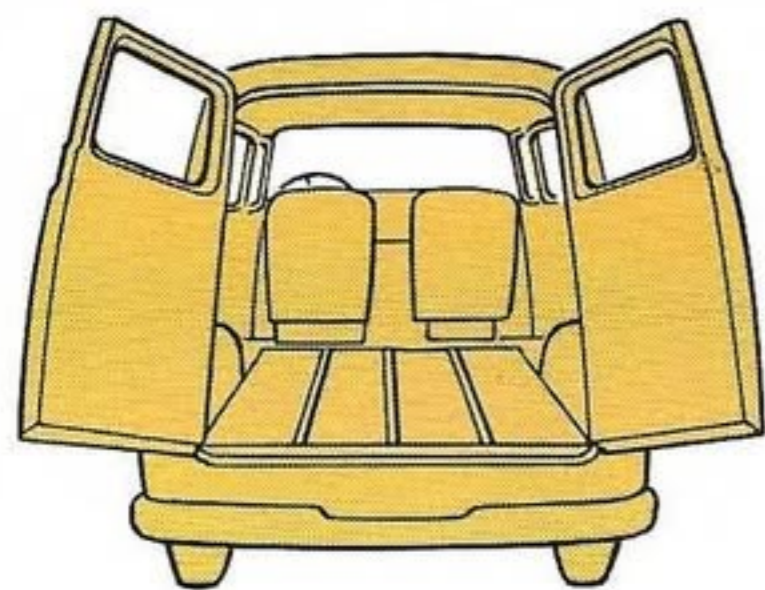

Heavy-duty plywood floor with steel skids, wide rear doors that open to two positions, and step-type rear bumper make loading easy.

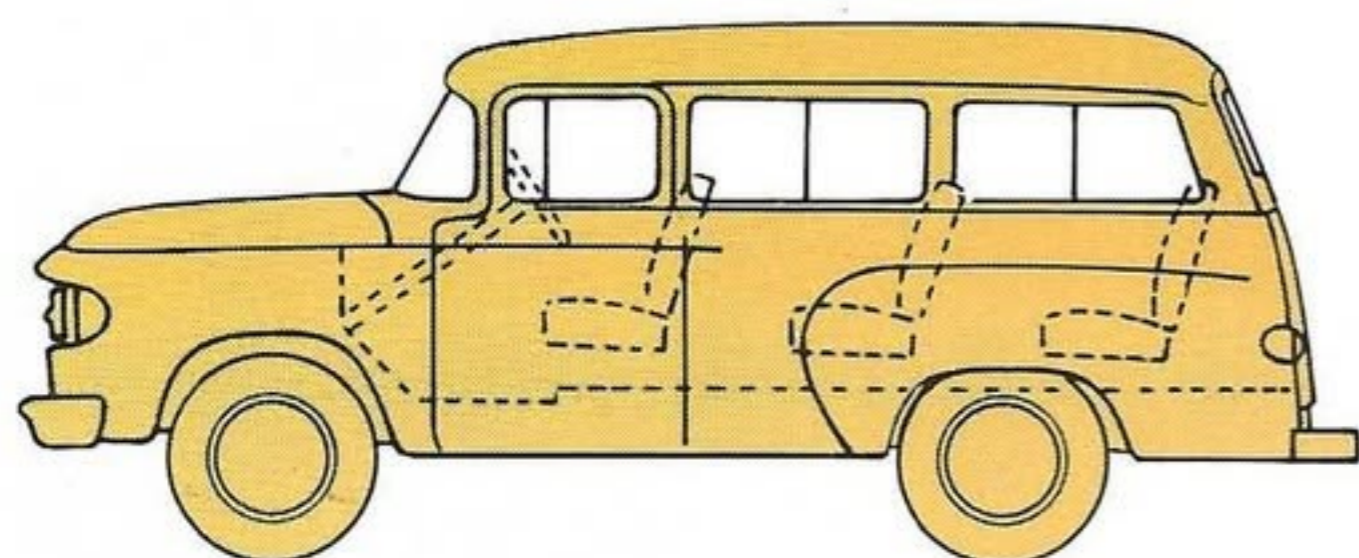

D100 TOWN WAGON—SEATS 6 OR 8.


STANDARD EQUIPMENT

- 140 hp, 225 cu. in. Dodge Slant Six engine
- Oil filter
- Closed crankcase ventilation
- 35-amp. alternator
- 3-speed synchro-shift transmission, column-mounted
- Self-adjusting brakes
- Front and rear Oriflow shock absorbers
- Spare wheel and tire
- Painted front bumper and step-type rear bumper
- Dual headlights
- Turn signals
- Dual exterior mirrors
- Vinyl seat upholstery
- Dome light
- Ashtray
- Coat hook
- Seat belts
1 on Town Panel
4 on 6-pass. Wagon
6 on 8-pass. Wagon
- Driver's sun visor, plus right visor on Wagon
- Driver-adjusted hand brake
- High-level ventilation
- Variable-speed electric windshield wipers with non-glare arms and blades
- Windshield washers
- Screw-type axle jack and wheel wrench
- Dual tail lamps


DIMENSIONS

Wheelbase	114"
Load length at floor (driver's seat in center position)	94 ¹¹ / ₁₆ "
Interior height	52 ³ / ₄ "
Floor width, maximum	65 ¹ / ₄ "
Width between wheelhousings	50 ⁷ / ₈ "
Rear doors, width (max. @ floor)	50 ¹ / ₄ "
Load space (cubic feet)	155
Outside width (rear fenders)	75 ¹ / ₈ "
Maximum overall length	197 ⁵ / ₃₂ "
Wagon load space—center and rear seat removed	94 ¹¹ / ₁₆ "
—rear seat only removed	58 ⁷ / ₈ "

OTHER DODGE MODELS

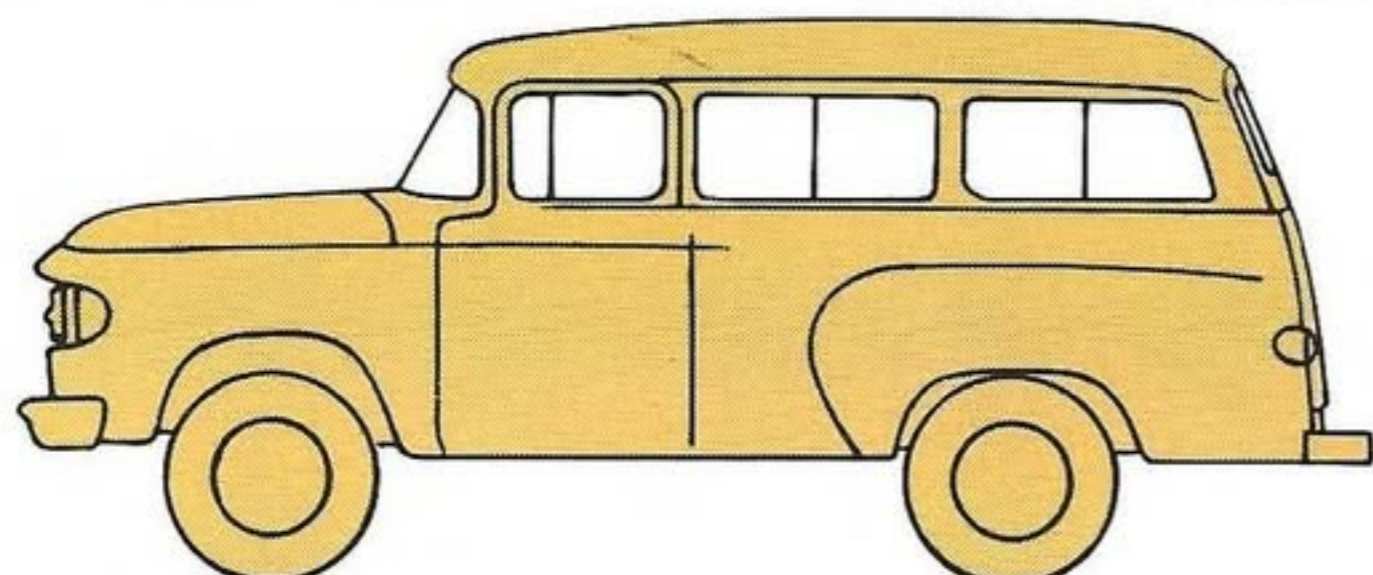

W100 4-WHEEL-DRIVE TOWN PANEL OR WAGON
(See Dodge 4-Wheel-Drive Catalog)

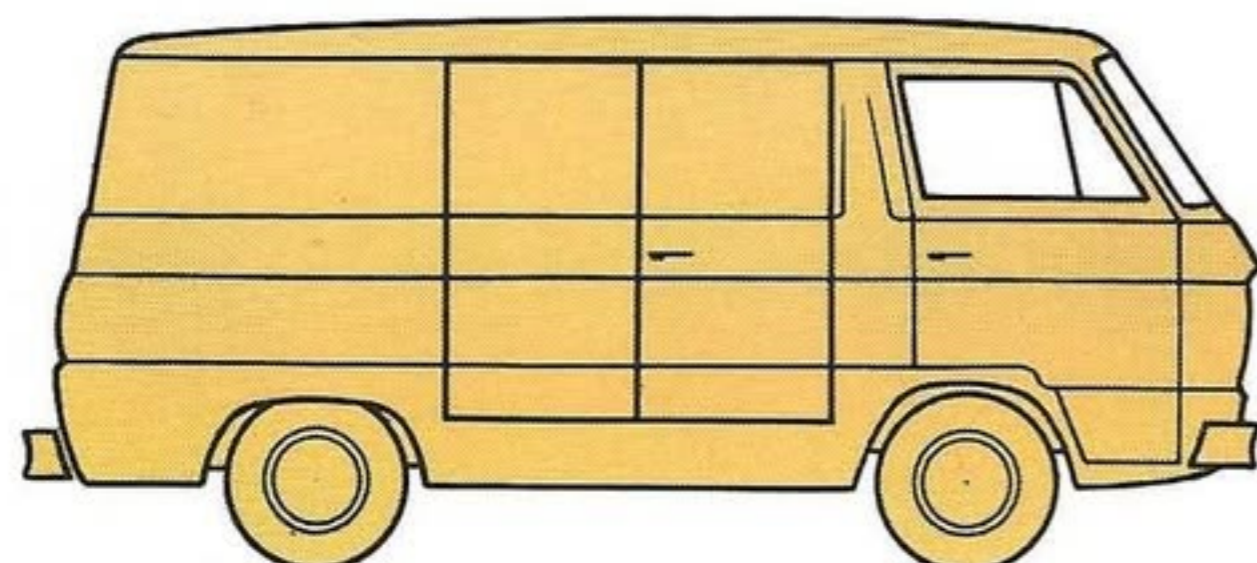


DODGE A100 COMPACT VANS AND WAGONS WITH 6 OR V8 POWER (See Dodge Compact Truck Catalog)

GVW Ratings	4,300, 5,200 Lbs.
Payload Allowance	
Town Panel	795—1,635 Lbs.
Town Wagon	565—1,405 Lbs.
Air Cleaner	1 Pint Oil Bath (6-Cyl.) (1 Qt., Extra, 6-Cyl.) Dry Paper Element (V8)
Alternator—Std.	12-Volt, 35-Amp.
—Extra	46-Amp. or 59-Amp.
Axle, Front	I-Beam
Capacity	2,500 Lbs.
Axle, Rear	Single-Speed Semifloating, Hypoid
Capacity	3,600 Lbs. (1)
Ratios (to 1)	3.23, 3.55, 3.91 (1)
Battery	12-Volt—53-Amp.-Hour
Brakes, Service	Hydraulic Self-Adjusting
Size—Front	11" x 2.25"
—Rear	11" x 2"
Total Lining Area—Sq. In.	196.8
Brakes, Parking	Rear Wheels, Driver-Adjustable
Size	95.4 Sq. In.
Clutch	Single-Plate, Dry Disc
Diameter and Area	10"—90.7 Sq. In. (6-Cyl.) 11", Extra, 6-Cyl.) 11"—123.7 Sq. In. (V8)
Cooling System—Capacity	13 Qts. (6-Cyl.), 20 Qts. (V8)
Engines—6-Cyl.—Std.	140 HP, 225
—V8—Extra	200 HP, 318
Frame	Drop-Center
Section Modulus	3.43
Fuel Tank—Capacity	17 Gals.
Location	Aft of Rear Axle
Shock Absorbers	Oriflow Front and Rear
Springs, Front—	
Capacity (at Pad)—Std.	1,025 Lbs.
—Extra	1,250 Lbs.
Springs, Rear—	
Capacity (at Pad)—Std.	1,400 Lbs.
—Extra	1,750 Lbs.
Steering	Recirculating Ball
Transmission—Std.	3-Spd. Syn. (A745)
—Extra	4-Spd. Syn. (NP435) (2)
Automatic—Extra	3-Spd. LoadLite
Tires	Tubeless
Minimum—	
Front and Single Rear	7.10-15-4
Max. Available—	
Front and Single Rear	6.50-16-6
Wheels and Rims—No. and Type	5, 5-Stud Disc
Windshield Wipers	Dual Electric Variable-Speed

(1) Anti-spin differential available.

(2) Close-spaced ratio.

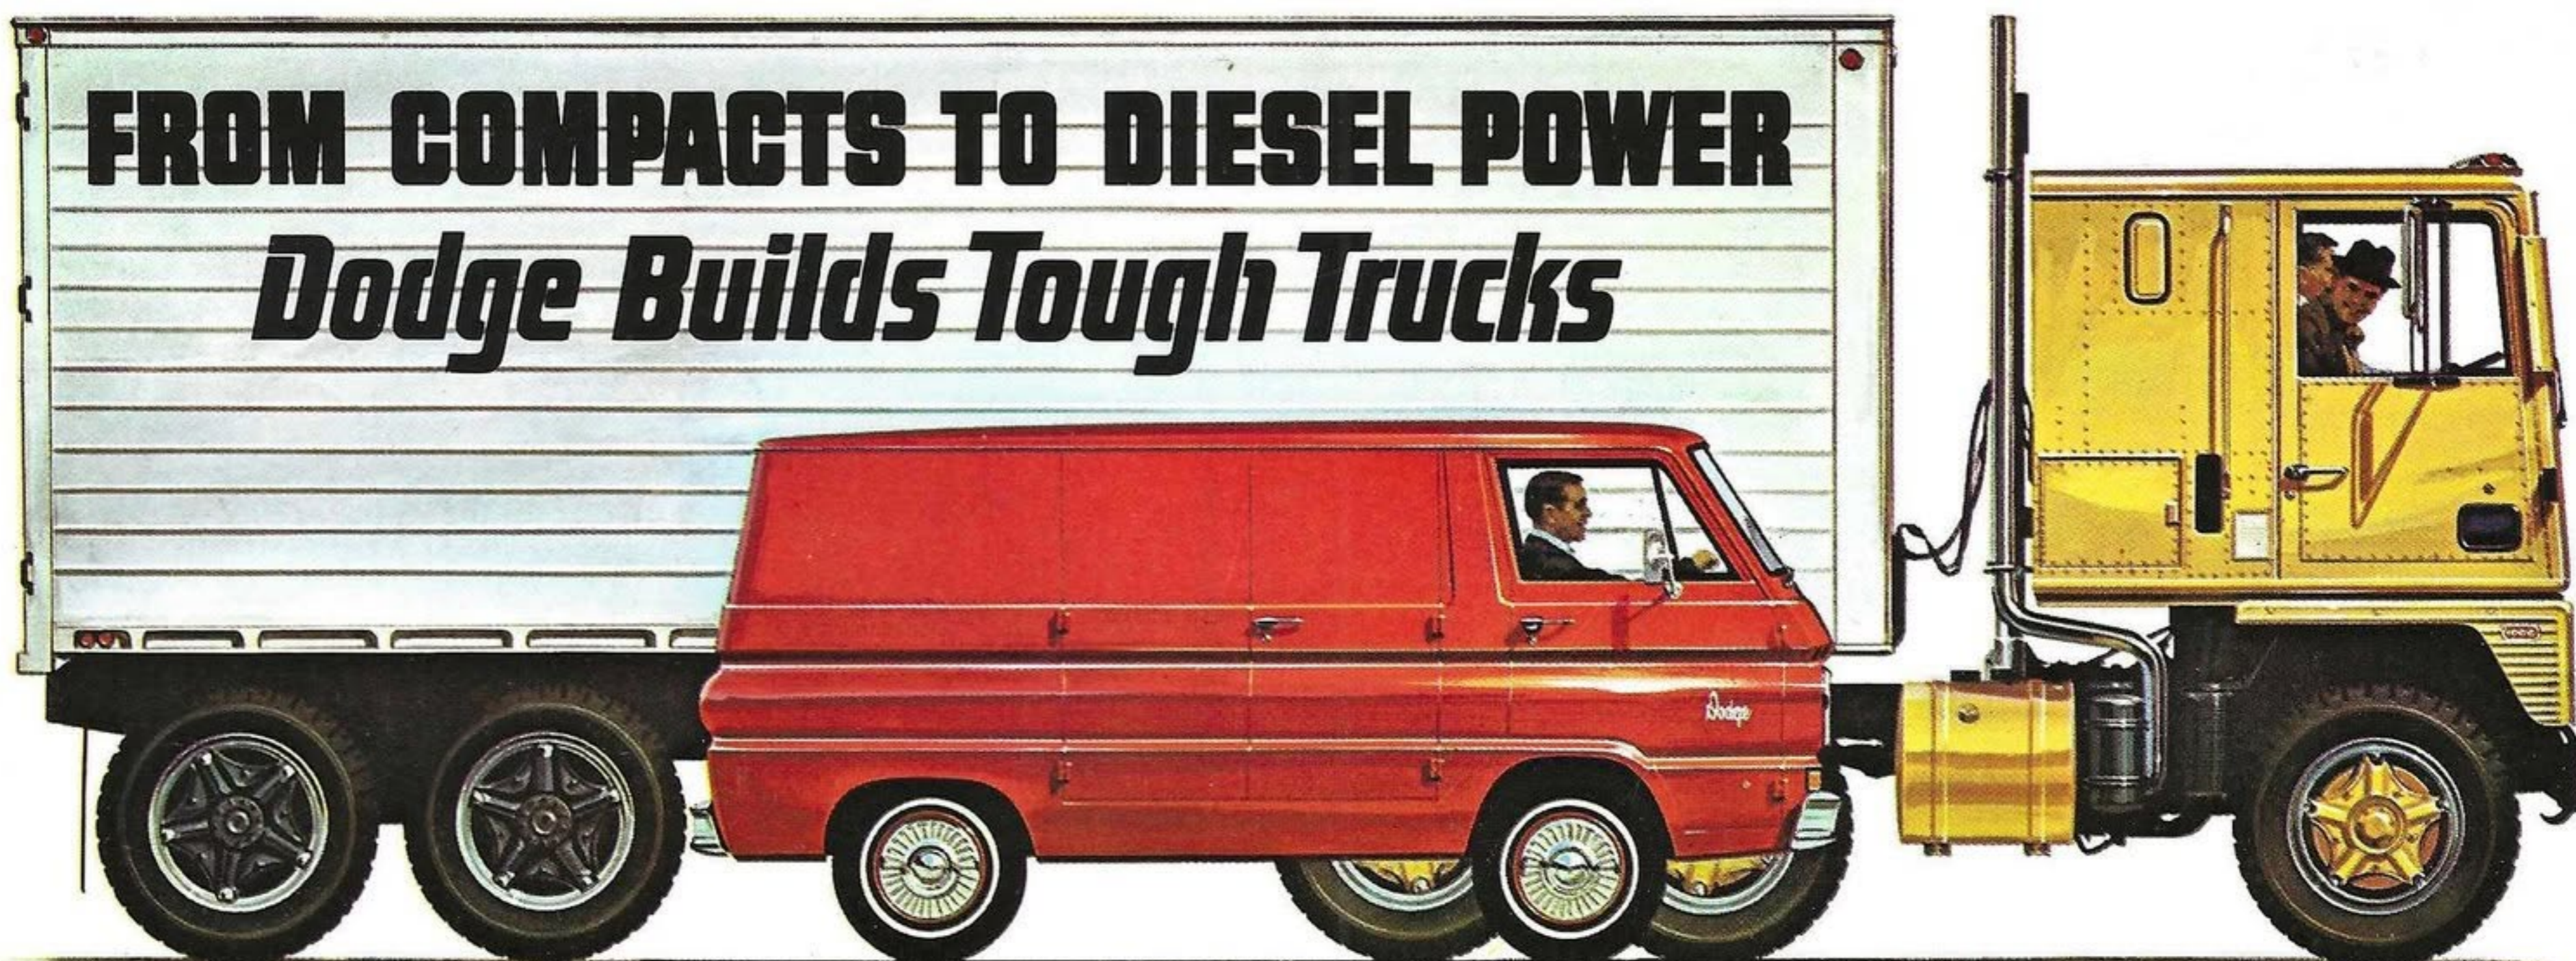

**DODGE
TRUCK
5-YEAR/
50,000-MILE
ENGINE AND DRIVE TRAIN
WARRANTY**

HERE'S HOW THIS WARRANTY COVERAGE PROTECTS YOU:

Chrysler Corporation warrants for 5 years or 50,000 miles or 1500 hours of operation, whichever comes first, against defects in materials and workmanship and will replace or repair at a Chrysler Motors Corporation authorized dealer's place of business gasoline and Perkins diesel engines (i.e., block, heads, and internal parts), intake manifold, water pump, flywheel, flywheel housing, clutch housing, torque converter, transmission (i.e., case and internal parts, excluding manual clutch), transfer case and all internal parts, drive shafts, center bearings, universal joints, driving axles and differentials, and drive wheel bearings of its new Dodge trucks, provided the owner has (1) the engine oil changed and universal joints (except sealed-type) lubricated and the oil-bath-type carburetor air filter cleaned every 3 months or 4000 miles (every 2 months or 2000 miles on models 400 through 1000), whichever comes first, (2) the engine oil filter replaced and dry-type carburetor air filter cleaned every second oil change, and dry-type carburetor air filter element replaced every 24,000 miles, (3) the crankcase ventilation system cleaned and serviced every 4000 miles, and (4) the transmission, transfer case and driving axle lubricants changed every 32,000 miles (every 20,000 miles on models 400 through 1000). The foregoing services must be performed more often when reasonably required due to severe dust or regular "stop and go" operation. Every 6 months the owner must furnish to such a dealer evidence of performance of the required service and request the dealer to certify (1) receipt of such evidence and (2) the truck's then current mileage.

Chrysler Corporation's warranty against defects in materials and workmanship on gasoline engines of 800, 900, and 1000 series new Dodge trucks is for 5 years, 100,000 miles or 3000 hours of operation, whichever comes first, and provides for repairing or replacing parts at a Chrysler Motors Corporation authorized dealer's place of business at no charge for parts and after 50,000 miles or 1500 hours of operation, at a prorated labor charge based on 25% up to 60,000 miles or 1800 hours of operation, 50% up to 75,000 miles or 2250 hours of operation, and 75% up to 100,000 miles or 3000 hours of operation, in each instance whichever comes first. This warranty covers the engine (i.e., block, heads and all internal parts), intake and exhaust manifolds, timing gears, water pump, flywheel, flywheel housing and clutch housing, provided the engine maintenance services required are performed and certified as specified above.

**DODGE
TRUCK
5-YEAR/
100,000-MILE
HEAVY-DUTY GASOLINE ENGINE
WARRANTY**

Dodge Builds Tough Trucks

DODGE DIVISION



**CHRYSLER
MOTORS CORPORATION**

Equipment listed as "optional" or "extra" is extra-cost equipment. Although all descriptions and pictorial representations of the trucks in this catalog are believed to be correct at time of publication, accuracy cannot be guaranteed. The policy of Dodge Truck is one of continual improvement; therefore, equipment, colors, materials and other specifications, model availability and prices are subject to change without notice or obligation. DODGE PANEL-WAGON CATALOG. Litho in U.S.A. 7/65 Rev. 81-305-5102.