FG 4x4 SPECIFICATIONS





2003

Weight (lbs.)		Model 639*	Model 649
Max. GVWR		12,000	14,050
	Front	5,510	5,730
	Rear	8,600	9,480
Body/Payload		Up to 6,255**	Up to 8,515**

Dimensions (in.)

Wheelbase	133.1	109.4/133.1		
Usable cab to rear axle	107.3	83.7/107.3		
Overall length (End of frame)	217.1	193.5/217.1		

Engine

Model	Mitsubishi 4D34-3AT3A	
Туре	4-stroke cycle, watercooled, direct injection, turbocharged, intercooled diesel	
No. of cylinders	Four in-line	
Piston displacement	238.0 cu. in. (3.9 liters)	
Max. output (SAE, gross)	145 hp@2,900 rpm	
Max. torque (SAE, gross)	275 lb.ft.@1,600 rpm	
Air cleaner	Dry paper element with snorkel and rain cap	
Starter	12-volt	
Alternator	12-volt, 100-amp	

Chassis

Chassis				
Clutch			Hydraulic control, 11.8 in., single dry plate	
Transmission		4-speed automatic	5-speed manual	
	Ratio	3.018/1.548/1.000/0.703, reverse 2.678	5.380/3.028/1.700/1.009/ 0.722, reverse 5.380	
	Transfer case	2-speed, low 1.987, high 1.090		
Axles	Front	Single-reduction hypoid gear		
	Ratio	5.714		
	Rear	Single-reduction hypoid gear		
	Ratio	5.714 (limited slip differential optional)		
Tires (Premium)		Single front, dual rear		
	Size	LT 235/85R16 (10 PR)		
Wheel		6Kx16-135-9t, 6-stud, 1-piece disc wheel		
Steering		Ball-nut-type with integral-type hydraulic power booster. Telescopic and tilt steering column with steering lock		
Suspension	Front	Heavy-duty laminated leaf springs with shock absorbers		
	Rear	Heavy-duty laminated leaf springs with shock absorbers		
Brakes	Service	Hydraulic with vacuum servo assist ABS, self-adjusting drum all around, with exhaust brake		
	Parking	Internal expanding shoe-type		
Fuel tank		33 gallons		
Electrical system		Two 12-volt, maintenance-free batteries		
Vehicle safety		Energy-absorbing steering wheel, crush bars in doors, daytime running lights and ABS standard		


*Not available in California.

**Weight approximate. See dealer for complete details.











A. Wheelbase (in.) 109.4/133.1

B. Usable cab to rear axle (in.) 83.7/107.3

C. Overall length (in.) 193.5/217.1

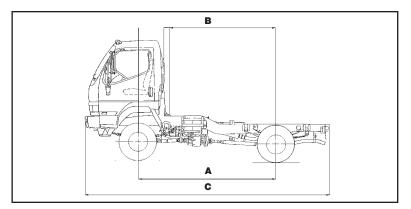



MITSUBISHI FUSO TRUCK OF AMERICA, Inc. 2015 Center Square Road Logan Twp., NJ 08085

For the dealer nearest you, or for more information, call: **877-202-9650**

Or visit our web site at: www.mitfuso.com

Vehicle specifications are subject to change without notice. Photos and descriptions included on this spec sheet may vary in comparison to actual vehicle models.

PRINTED IN THE U.S.A. ON RECYCLED AND RECYCLABLE PAPER 6/02. ©2002 MITSUBISHI FUSO TRUCK OF AMERICA, Inc.