

Engine	2.41	Petrol	2.5	CRDi	
-	Longitudinal front		Longitudinal front-		
Configuration	rear wheels	ourica ariviriy	rear wheels	ourica di willy	
Cylinder capacity	2.4 litres (2359cc)		2.5 litres (2497cc)		
Tumber of cylinders	4-in-line		4-in-line		
/alve system	DOHC (4 Valve / C	(ار	DOHC (4 Valve / Cyl)		
Maximum power	129 kW @ 6000 RF	M	100 kW @ 3800 RPM (manual) 125 kW @ 3600 RPM (auto)		
<u> </u>			343 Nm @ 1500-25		
Maximum torque	228 Nm @ 4200 RF	PM	441 Nm @ 2000-2		
Fuel System	Sequential multi-point fuel injection Common Rail Direct injection		t injection (CRDi)		
Bore x stroke	88.0 mm x 97.0 mm	7.0 mm 91.0 mm x 96.0 mm		1	
Compression ratio	10.5		16.4		
Transmission	2.4 I	Petrol	2.5	CRDi	
Manual	5 speed manual tra	ansmission	6 speed manual transmission		
Automatic				5 speed automatic selectronic transmission	
Gear ratio	Mai	nual	Manual	Auto	
1st	4.2		4.489	3.730	
2nd		283	2.337	2.308	
Brd		114	1.350	1.519	
ith		000	1.000	1.000	
5th		314	0.784	0.840	
5th		-	0.679	- 0.040	
Reverse		314	4.253	2.740	
Final		222	3.692	2.929	
Steering		Petrol		CRDi	
Type		ssisted, rack and pin			
Column			ing column with tilt a	diustment	
Minimum turning circle diameter	11.22 metres	•		,	
between kerbs					
Number of steering wheel turns lock to lock	3.57				
Brakes	2.4 Petrol 2.5 CRDi				
General	Hydraulic, power assisted braking system 300 mm ventilated disc, 2 spot calliper brake with pad wear warning device				
Front			· · · · · · · · · · · · · · · · · · ·		
Rear	324 mm ventilated	disc. i spot-calliber	Drake With Dan Wear I		
	and drum in-hat n		brake with pad wear	warning device	
ADC	·	arking brake system	·		
ABS	·	arking brake system el, 4 sensor Anti-skio	d Braking System (AB:	S) and Electronic	
ABS Dimensions	Standard 4-chann Brakeforce Distrib	arking brake system el, 4 sensor Anti-skio	d Braking System (AB:		
Dimensions Exterior	Standard 4-chann Brakeforce Distrib	arking brake system el, 4 sensor Anti–skio ution (EBD)	d Braking System (AB:	S) and Electronic	
Dimensions	Standard 4-chann Brakeforce Distrib	arking brake system el, 4 sensor Anti-skio ution (EBD) Petrol	d Braking System (AB:	S) and Electronic	
Dimensions Exterior Length Width	Standard 4-chann Brakeforce Distrib	arking brake system el, 4 sensor Anti-skio ution (EBD) Petrol 512	d Braking System (AB: 2.5 5 mm 0 mm	S) and Electronic	
Dimensions Exterior Length Width Height	Standard 4-chann Brakeforce Distrib	arking brake system el, 4 sensor Anti-skio ution (EBD) Petrol 512: 192:	d Braking System (AB: 2.5 5 mm 0 mm 5 mm	S) and Electronic	
Dimensions Exterior Length Width Height Wheelbase	Standard 4-chann Brakeforce Distrib	arking brake system el, 4 sensor Anti-skio ution (EBD) Petrol 512: 192: 193: 320	Braking System (AB: 2.5 5 mm 0 mm 5 mm 0 mm	S) and Electronic	
Dimensions Exterior Length Width Height Wheelbase Wheel track - front / rear	Standard 4-chann Brakeforce Distrib	arking brake system el, 4 sensor Anti-skio ution (EBD) Petrol 512: 192: 193: 320	d Braking System (AB: 2.5 5 mm 0 mm 5 mm	S) and Electronic	
Dimensions Exterior Length Width Height Wheelbase Wheel track – front / rear Minimum ground clearance (based on	Standard 4-chann Brakeforce Distrib	arking brake system el, 4 sensor Anti-skio ution (EBD) Petrol 512: 192: 193: 320:	Braking System (AB: 2.5 5 mm 0 mm 5 mm 0 mm	S) and Electronic	
Dimensions Exterior Length Width Height Wheelbase Wheel track - front / rear Minimum ground clearance (based on kerb weight)	Standard 4-chann Brakeforce Distrib 2.4 I	arking brake system el, 4 sensor Anti-skio ution (EBD) Petrol 512 192 193 320 1685 /	2.5 5 mm 0 mm 5 mm 0 mm 1660 mm	S) and Electronic	
Dimensions Exterior Length Width Height Wheelbase Wheel track – front / rear Minimum ground clearance (based on kerb weight) Interior	Standard 4-chann Brakeforce Distrib 2.4 I	arking brake system el, 4 sensor Anti-skio ution (EBD) Petrol 512: 192: 193: 320: 1685 /	2.5 5 mm 0 mm 5 mm 0 mm 1660 mm	S) and Electronic CRDi Crew Van	
Dimensions Exterior Length Width Height Wheelbase Wheel track – front / rear Minimum ground clearance (based on kerb weight) Interior Cargo Length	Standard 4-chann Brakeforce Distrib 2.4 I	arking brake system el, 4 sensor Anti-skio ution (EBD) Petrol 512 192 193 320 1685 /	2.5 5 mm 0 mm 5 mm 0 mm 1660 mm	S) and Electronic	
Dimensions Exterior Length Width Height Wheelbase Wheel track – front / rear Minimum ground clearance (based on kerb weight) Interior Cargo Length Cargo Width	Standard 4-chann Brakeforce Distrib 2.4 I	arking brake system el, 4 sensor Anti-skio ution (EBD) Petrol 512 192 193 320 1685 / Crew Van 1585 mm	2.5 5 mm 0 mm 5 mm 0 mm 1660 mm 0 mm 2375 mm	Crew Van	
Dimensions Exterior Length Width Height Wheelbase Wheel track - front / rear Minimum ground clearance (based on kerb weight) Interior Cargo Length Cargo Width Cargo Height	Standard 4-chann Brakeforce Distrib 2.4 I Van 2375 mm 1620 mm	el, 4 sensor Anti-skio tion (EBD) Petrol 512 1920 1930 1685 / 1900 Crew Van 1585 mm 1620 mm	2.5 5 mm 0 mm 5 mm 1660 mm 2375 mm 2375 mm	Crew Van 1585 mm 1620 mm	
Dimensions Exterior Length Width Height Wheelbase Wheel track - front / rear Minimum ground clearance (based on kerb weight) Interior Cargo Length Cargo Width Cargo Height Distance between wheel arches	Standard 4-chann Brakeforce Distrib 2.4 I Van 2375 mm 1620 mm 1350 mm	arking brake system el, 4 sensor Anti-skio ution (EBD) Petrol 512: 192: 193: 320: 1685 / 196 Crew Van 1585 mm 1620 mm	2.5 5 mm 0 mm 5 mm 1660 mm 2375 mm 1620 mm 1350 mm	Crew Van 1585 mm 1620 mm 1350 mm	
Dimensions Exterior Length Width Height Wheelbase Wheel track - front / rear Minimum ground clearance (based on kerb weight) Interior Cargo Length Cargo Width Cargo Height Distance between wheel arches Cargo Capacity (VDA)	Standard 4-chann Brakeforce Distrib 2.4 I Van 2375 mm 1620 mm 1350 mm 1260 mm 4308 L	el, 4 sensor Anti-skio tion (EBD) Petrol 512 192 193 320 1685 / 190 Crew Van 1585 mm 1620 mm 1350 mm	2.5 5 mm 0 mm 5 mm 1660 mm 0 mm 2375 mm 1620 mm 1350 mm 1260 mm 4426 L	Crew Van 1585 mm 1620 mm 1350 mm 1260 mm	
Dimensions Exterior Length Width Height Wheelbase Wheel track – front / rear Winimum ground clearance (based on cerb weight) Interior Largo Length Largo Width Largo Height Distance between wheel arches Largo Capacity (VDA) Weight	Standard 4-chann Brakeforce Distrib 2.4 I Van 2375 mm 1620 mm 1350 mm 1260 mm 4308 L	el, 4 sensor Anti-skio tion (EBD) Petrol 512 1920 1930 1685 / 1900 Crew Van 1585 mm 1620 mm 1350 mm 1260 mm	2.5 5 mm 0 mm 5 mm 1660 mm 0 mm 2375 mm 1620 mm 1350 mm 1260 mm 4426 L	Crew Van 1585 mm 1620 mm 1350 mm 1260 mm	
Dimensions Exterior Length Width Height Wheelbase Wheel track – front / rear Minimum ground clearance (based on kerb weight) Interior Cargo Length Cargo Width Cargo Width Distance between wheel arches Cargo Capacity (VDA) Weight Kerb/GVM	Van 2375 mm 1620 mm 1350 mm 4308 L 2.4	el, 4 sensor Anti-skio el, 4 sensor Anti-skio ution (EBD) 2etrol 512 192 193 320 1685 / 190 Crew Van 1585 mm 1620 mm 1350 mm 1260 mm 2500 L	2.5 5 mm 0 mm 5 mm 0 mm 1660 mm 10 mm 2375 mm 1620 mm 1350 mm 1260 mm 4426 L	Crew Van 1585 mm 1620 mm 1350 mm 1260 mm 2511 L CRDi Crew Van	
Dimensions Exterior Length Width Height Wheelbase Wheel track – front / rear Minimum ground clearance (based on kerb weight) Interior Cargo Length Cargo Width Cargo Height Distance between wheel arches Cargo Capacity (VDA) Weight Kerb/GVM Manual	Van 2375 mm 1620 mm 1350 mm 4308 L 2.4 I	arking brake system el, 4 sensor Anti-skio ution (EBD) Petrol 512: 192: 193: 320: 1685 / 190: Crew Van 1585 mm 1620 mm 1350 mm 1260 mm 2500 L Petrol Crew Van	2.5 5 mm 0 mm 5 mm 0 mm 1660 mm 1375 mm 1620 mm 1350 mm 1260 mm 1260 mm 1260 mm 1260 mm	Crew Van 1585 mm 1620 mm 1350 mm 1260 mm 2511 L CRDi Crew Van 2107 / 3160 k	
Dimensions Exterior Length Width Height Wheelbase Wheel track – front / rear Minimum ground clearance (based on kerb weight) Interior Cargo Length Cargo Width Cargo Height Distance between wheel arches Cargo Capacity (VDA) Weight Kerb/GVM Manual Automatic	Van 2375 mm 1620 mm 1350 mm 1260 mm 4308 L 2.4 Van 1943 / 2950 kg	arking brake system el, 4 sensor Anti-skio ution (EBD) Petrol 512 192 193 320 1685 / 190 Crew Van 1585 mm 1620 mm 1350 mm 1260 mm 2500 L Petrol Crew Van 2501 L Petrol Crew Van 2015 / 3030 kg	2.5 5 mm 0 mm 5 mm 0 mm 1660 mm 1350 mm 1260 mm 1260 mm 1260 mm 1260 mm 2375 mm 2375 mm 2375 mm 2375 mm 2426 L 2.5 Van 2047 / 3160 kg 2062 / 3230 kg	Crew Van 1585 mm 1620 mm 1350 mm 1260 mm 2511 L CRDi Crew Van 2107 / 3160 k 2122 / 3230 k	
Dimensions Exterior Length Width Height Wheelbase Wheel track – front / rear Minimum ground clearance (based on kerb weight) Interior Cargo Length Cargo Width Cargo Height Distance between wheel arches Cargo Capacity (VDA) Weight Kerb/GVM Manual Automatic GCM	Van 2.4 I Van 2375 mm 1620 mm 1350 mm 1260 mm 4308 L 2.4 I Van 1943 / 2950 kg - Van	arking brake system el, 4 sensor Anti-skio ution (EBD) Petrol 512 192 193 320 1685 / 190 Crew Van 1585 mm 1620 mm 1350 mm 1260 mm 2500 L Petrol Crew Van 2015 / 3030 kg - Crew Van	2.5 5 mm 0 mm 5 mm 0 mm 1660 mm 1350 mm 1260 mm 1260 mm 1260 mm 2426 L 2.5 Van 2047 / 3160 kg 2062 / 3230 kg	Crew Van 1585 mm 1620 mm 1350 mm 1260 mm 2511 L CRDi Crew Van 2107 / 3160 k 2122 / 3230 k Crew Van	
Dimensions Exterior Length Width Height Wheelbase Wheel track – front / rear Minimum ground clearance (based on kerb weight) Interior Cargo Length Cargo Height Distance between wheel arches Cargo Capacity (VDA) Weight Kerb/GVM Manual Automatic GCM Manual	Van 2375 mm 1620 mm 1350 mm 1260 mm 4308 L 2.4 Van 1943 / 2950 kg	arking brake system el, 4 sensor Anti-skio ution (EBD) Petrol 512 192 193 320 1685 / 190 Crew Van 1585 mm 1620 mm 1350 mm 1260 mm 2500 L Petrol Crew Van 2501 L Petrol Crew Van 2015 / 3030 kg	2.5 5 mm 0 mm 5 mm 0 mm 1660 mm 1350 mm 1260 mm 1260 mm 1260 mm 2375	Crew Van 1585 mm 1620 mm 1350 mm 1260 mm 2511 L CRDi Crew Van 2107 / 3160 k 2122 / 3230 k Crew Van 5160 kg	
Dimensions Exterior Length Width Height Wheelbase Wheel track – front / rear Minimum ground clearance (based on kerb weight) Interior Cargo Length Cargo Height Distance between wheel arches Cargo Capacity (VDA) Weight Kerb/GVM Manual Automatic GCM Manual Automatic	Van 2.4 I Van 2375 mm 1620 mm 1350 mm 1260 mm 1350 mm 1260 mm 4308 L 2.4 I Van 1943 / 2950 kg - Van 4450 kg -	arking brake system el, 4 sensor Anti-skio ution (EBD) Petrol 512 192 193 320 1685 / 190 Crew Van 1585 mm 1620 mm 1350 mm 1260 mm 2500 L Petrol Crew Van 2015 / 3030 kg - Crew Van 4530 kg	2.5 5 mm 0 mm 5 mm 0 mm 1660 mm 1350 mm 1260 mm 1350 mm 1260 mm 2047 / 3160 kg 2062 / 3230 kg Van 5160 kg 4730 kg	Crew Van 1585 mm 1620 mm 1350 mm 1260 mm 2511 L CRDi Crew Van 2107 / 3160 k 2122 / 3230 k Crew Van 5160 kg 4731 kg	
Dimensions Exterior Length Width Height Wheelbase Wheel track – front / rear Minimum ground clearance (based on kerb weight) Interior Cargo Length Cargo Width Cargo Width Cargo Height Distance between wheel arches Cargo Capacity (VDA) Weight Kerb/GVM Manual Automatic GCM Manual Automatic Payload	Van 2.4 1 Van 2375 mm 1620 mm 1350 mm 1260 mm 1350 mm 1260 mm 4308 L 2.4 1 Van 1943 / 2950 kg - Van 4450 kg - Van	arking brake system el, 4 sensor Anti-skio ution (EBD) Petrol 512 192 193 320 1685 / 196 Crew Van 1585 mm 1620 mm 1350 mm 1260 mm 2500 L Petrol Crew Van 2015 / 3030 kg — Crew Van 4530 kg — Crew Van	2.5 5 mm 0 mm 5 mm 0 mm 1660 mm 1 mm 1620 mm 1350 mm 1260 mm 1260 mm 1350 mm 1260 mm 1360 kg 2062 / 3230 kg Van 5160 kg 4730 kg Van	Crew Van 1585 mm 1620 mm 1350 mm 1260 mm 2511 L CRDi Crew Van 2107 / 3160 k 2122 / 3230 k Crew Van 5160 kg 4731 kg Crew Van	
Dimensions Exterior Length Width Height Wheelbase Wheel track – front / rear Minimum ground clearance (based on kerb weight) Interior Cargo Length Cargo Width Cargo Width Cargo Height Distance between wheel arches Cargo Capacity (VDA) Weight Kerb/GVM Manual Automatic GCM Manual Automatic Payload Manual	Van 2.4 I Van 2375 mm 1620 mm 1350 mm 1260 mm 1350 mm 1260 mm 4308 L 2.4 I Van 1943 / 2950 kg - Van 4450 kg -	arking brake system el, 4 sensor Anti-skio ution (EBD) Petrol 512 192 193 320 1685 / 190 Crew Van 1585 mm 1620 mm 1350 mm 1260 mm 2500 L Petrol Crew Van 2015 / 3030 kg - Crew Van 4530 kg	2.5 5 mm 0 mm 5 mm 0 mm 1660 mm 1350 mm 1260 mm 1350 mm 1260 mm 2047 / 3160 kg 2062 / 3230 kg Van 5160 kg 4730 kg Van 1113 kg	Crew Van 1585 mm 1620 mm 1350 mm 1260 mm 2511 L CRDi Crew Van 2107 / 3160 k 2122 / 3230 k Crew Van 5160 kg 4731 kg Crew Van 1123 kg	
Dimensions Exterior Length Width Height Wheelbase Wheel track – front / rear Minimum ground clearance (based on kerb weight) Interior Cargo Length Cargo Width Cargo Width Cargo Height Distance between wheel arches Cargo Capacity (VDA) Weight Kerb/GVM Manual Automatic GCM Manual Automatic Payload Manual Automatic	Van 2.4 I Van 2375 mm 1620 mm 1350 mm 1260 mm 1350 mm 1260 mm 4308 L 2.4 I Van 1943 / 2950 kg - Van 4450 kg - Van 1007 kg	arking brake system el, 4 sensor Anti-skio ution (EBD) Petrol 512 192 193 320 1685 / 196 Crew Van 1585 mm 1620 mm 1350 mm 1260 mm 2500 L Petrol Crew Van 2015 / 3030 kg — Crew Van 4530 kg — Crew Van 1015 kg —	2.5 5 mm 0 mm 5 mm 0 mm 1660 mm 1750 mm 1620 mm 1350 mm 1260 mm 1350 mm 1260 mm 1350 mm 1260 mm 1350 mm 1260 mm 1350 mm 1426 L 2047 / 3160 kg 2062 / 3230 kg Van 5160 kg 4730 kg Van 1113 kg 1098 kg	Crew Van 1585 mm 1620 mm 1350 mm 1260 mm 2511 L CRDi Crew Van 2107 / 3160 k 2122 / 3230 k Crew Van 5160 kg 4731 kg Crew Van 1123 kg 1108 kg	
Dimensions Exterior Length Width Height Wheelbase Wheel track – front / rear Minimum ground clearance (based on kerb weight) Interior Cargo Length Cargo Width Cargo Height Distance between wheel arches Cargo Capacity (VDA) Weight Kerb/GVM Manual Automatic GCM Manual Automatic Payload Manual Automatic Towing Capacity	Van 2375 mm 1620 mm 1350 mm 1260 mm 4308 L 2.4 Van 1943 / 2950 kg - Van 4450 kg - Van 1007 kg - 2.4	arking brake system el, 4 sensor Anti-skio ution (EBD) Petrol 512 192 193 320 1685 / 196 Crew Van 1585 mm 1620 mm 1350 mm 1260 mm 2500 L Petrol Crew Van 2015 / 3030 kg — Crew Van 4530 kg — Crew Van	2.5 5 mm 0 mm 5 mm 0 mm 1660 mm 0 mm Van 2375 mm 1620 mm 1350 mm 1260 mm 1260 mm 2426 L 2.5 Van 2047 / 3160 kg 2062 / 3230 kg Van 5160 kg 4730 kg Van 1113 kg 1098 kg 2.5 2000 / 750	Crew Van 1585 mm 1620 mm 1350 mm 1260 mm 2511 L CRDi Crew Van 2107 / 3160 k 2122 / 3230 k Crew Van 5160 kg 4731 kg Crew Van 1123 kg 1108 kg CRDi kg (Manual)	
Dimensions Exterior Length Width Height Wheelbase Wheel track – front / rear Minimum ground clearance (based on kerb weight) Interior Cargo Length Cargo Width Cargo Height Distance between wheel arches Cargo Capacity (VDA) Weight Kerb/GVM Manual Automatic GCM Manual Automatic Payload Manual Automatic Towing Capacity Braked / unbraked	Van 2375 mm 1620 mm 1350 mm 1260 mm 4308 L 2.4 Van 1943 / 2950 kg - Van 4450 kg - Van 1007 kg - 2.4	2015 / 3030 kg 2016 Crew Van 2017 / 3030 kg 2017 / 3030 kg 2018 / 3030 kg	2.5 5 mm 0 mm 5 mm 0 mm 1660 mm 1 mm Van 2375 mm 1620 mm 1350 mm 1260 mm 1260 mm 2375 mm 1620 mm 1350 mm 1260 mm 1350 mm 1260 mm 14426 L 2.5 Van 2047 / 3160 kg 2062 / 3230 kg Van 5160 kg 4730 kg Van 1113 kg 1098 kg 2.5 2000 / 750 1500 / 750	Crew Van 1585 mm 1620 mm 1350 mm 1260 mm 2511 L CRDi Crew Van 2107 / 3160 k 2122 / 3230 k Crew Van 5160 kg 4731 kg Crew Van 1123 kg 1108 kg CRDi kg (Manual) 0 kg (Auto)	
Dimensions Exterior Length Width Height Wheelbase Wheel track – front / rear Minimum ground clearance (based on kerb weight) Interior Cargo Length Cargo Width Cargo Height Distance between wheel arches Cargo Capacity (VDA) Weight Kerb/GVM Manual Automatic GCM Manual Automatic Payload Manual Automatic Towing Capacity Braked / unbraked Maximum towball weight	Van 2375 mm 1620 mm 1350 mm 1260 mm 1350 mm 1260 mm 4308 L 2.4 Van 1943 / 2950 kg - Van 4450 kg - Van 1007 kg - 2.4 1500 /	2015 / 3030 kg 2016 Crew Van 2017 / 3030 kg 2018 Crew Van 2018 / 3030 kg	2.5 5 mm 0 mm 5 mm 0 mm 1660 mm 17 mm 1850 mm 1850 mm 1850 mm 1850 mm 1860 mm 1850 mm 1860 mm 186	Crew Van 1585 mm 1620 mm 1350 mm 1260 mm 2511 L CRDi Crew Van 2107 / 3160 k 2122 / 3230 k Crew Van 5160 kg 4731 kg Crew Van 1123 kg 1108 kg CRDi kg (Manual) 0 kg (Auto)	
Dimensions Exterior Length Width Height Wheelbase Wheel track – front / rear Minimum ground clearance (based on kerb weight) Interior Cargo Length Cargo Width Cargo Height Distance between wheel arches Cargo Capacity (VDA) Weight Kerb/GVM Manual Automatic GCM Manual Automatic Payload Manual Automatic Towing Capacity Braked / unbraked Maximum towball weight Maximum roof load 2 / 3 rack system	Van 2375 mm 1620 mm 1350 mm 1260 mm 1350 mm 1260 mm 4308 L 2.4 Van 1943 / 2950 kg - Van 4450 kg - Van 1007 kg - 2.4 1500 /	2015 / 3030 kg 2016 Crew Van 2017 / 3030 kg 2018 Crew Van 2018 / 3030 kg	2.5 5 mm 0 mm 5 mm 0 mm 1660 mm 1750 mm 1620 mm 1350 mm 1260 mm 1426 L 2.5 Van 2047 / 3160 kg 2062 / 3230 kg Van 5160 kg 4730 kg Van 1113 kg 1098 kg 2.5 2000 / 750 1500 / 750 1500 / 750	Crew Van 1585 mm 1620 mm 1350 mm 1260 mm 2511 L CRDi Crew Van 2107 / 3160 k 2122 / 3230 k Crew Van 5160 kg 4731 kg Crew Van 1123 kg 1108 kg CRDi kg (Manual) 0 kg (Auto) 0 kg	
Dimensions Exterior Length Width Height Wheelbase Wheel track – front / rear Minimum ground clearance (based on kerb weight) Interior Cargo Length Cargo Width Cargo Height Distance between wheel arches Cargo Capacity (VDA) Weight Kerb/GVM Manual Automatic GCM Manual Automatic Payload Manual Automatic Towing Capacity Braked / unbraked Maximum towball weight Maximum roof load 2 / 3 rack system Fuel Consumption Figures*	Van 2375 mm 1620 mm 1350 mm 1260 mm 4308 L 2.4 Van 1943 / 2950 kg - Van 4450 kg - Van 1007 kg - 2.4 1500 / 1500 / Ma	2015 / 3030 kg 2016 Crew Van 2017 / 3030 kg 2018 Crew Van 2018 / 3030 kg	2.5 5 mm 0 mm 5 mm 0 mm 1660 mm 1 mm 1620 mm 1350 mm 1260 mm 1350 mm 1260 mm 4426 L 2.5 Van 2047 / 3160 kg 2062 / 3230 kg Van 1113 kg 1098 kg 2.5 2000 / 750 1500 / 750 150 / Manual	Crew Van 1585 mm 1620 mm 1350 mm 1260 mm 2511 L CRDi Crew Van 2107 / 3160 k 2122 / 3230 k Crew Van 5160 kg 4731 kg Crew Van 1123 kg 1108 kg CRDi kg (Manual) 0 kg (Auto) 0 kg 125 kg	
Dimensions Exterior Length Width Height Wheelbase Wheel track – front / rear Minimum ground clearance (based on kerb weight) Interior Cargo Length Cargo Height Distance between wheel arches Cargo Capacity (VDA) Weight Kerb/GVM Manual Automatic GCM Manual Automatic Payload Manual Automatic Towing Capacity Braked / unbraked Maximum towball weight Maximum roof load 2 / 3 rack system Fuel Consumption Figures* Combined (L/100km)	Van 2375 mm 1620 mm 1350 mm 1260 mm 4308 L 2.4 Van 1943 / 2950 kg - Van 4450 kg - Van 1007 kg - 2.4 1500 / 15(100 / Ma)	2500 L 26trol Crew Van 1350 mm 1260 mm 2500 L 26trol Crew Van 1358 mm 1620 mm 1350 mm 2500 L 26trol Crew Van 2015 / 3030 kg - Crew Van 4530 kg - Crew Van 1015 kg - 2750 kg 125 kg 1010 1010 1010 1010 1010 1010 1010 10	2.5 5 mm 0 mm 5 mm 0 mm 1660 mm 1 mm 1620 mm 1350 mm 1260 mm 1426 L 2.5 Van 2047 / 3160 kg 2062 / 3230 kg Van 5160 kg 4730 kg Van 1113 kg 1098 kg 2.5 2000 / 750 1500 / 750 150 / Manual 8.0 /	Crew Van 1585 mm 1620 mm 1350 mm 1260 mm 2511 L CRDi Crew Van 2107 / 3160 k 2122 / 3230 k Crew Van 5160 kg 4731 kg Crew Van 1123 kg 1108 kg CRDi kg (Manual) 0 kg (Auto) 0 kg 125 kg 11/Auto / 8.8	
Dimensions Exterior Length Width Height Wheelbase Wheel track – front / rear Minimum ground clearance (based on kerb weight) Interior Cargo Length Cargo Width Cargo Height Distance between wheel arches Cargo Capacity (VDA) Weight Kerb/GVM Manual Automatic GCM Manual Automatic Payload Manual Automatic Towing Capacity Braked / unbraked Maximum towball weight Maximum roof load 2 / 3 rack system Fuel Consumption Figures* Combined (L/100km) Urban (L/100km)	Van 2375 mm 1620 mm 1350 mm 1260 mm 4308 L 2.4 I Van 1943 / 2950 kg - Van 4450 kg - Van 1007 kg - 2.4 I 1500 / 15(100 / Ma) 1(1 iii)	2015 / 3030 kg 2016 / 3050 kg 2017 / 3050 kg	2.5 5 mm 0 mm 5 mm 0 mm 1660 mm 1750 mm 1620 mm 1350 mm 1260 mm 1426 L 2.5 Van 2047 / 3160 kg 2062 / 3230 kg Van 5160 kg 4730 kg Van 1113 kg 1098 kg 2.5 2000 / 750 1500 / 750 1500 / Manual 8.0 / 8.0 / 10.2 /	Crew Van 1585 mm 1620 mm 1350 mm 1260 mm 2511 L CRDi Crew Van 2107 / 3160 k 2122 / 3230 k Crew Van 5160 kg 4731 kg Crew Van 1123 kg 1108 kg CRDi kg (Manual) 0 kg (Auto) 0 kg 125 kg 11/Auto / 8.8 / 11.2	
Dimensions Exterior Length Width Height Wheelbase Wheel track - front / rear	Van 2375 mm 1620 mm 1350 mm 1260 mm 1350 kg - Van 1943 / 2950 kg - Van 1007 kg - 1500 / 1500 / Ma 100 / Ma 1	2500 L 26trol Crew Van 1350 mm 1260 mm 2500 L 26trol Crew Van 1358 mm 1620 mm 1350 mm 2500 L 26trol Crew Van 2015 / 3030 kg - Crew Van 4530 kg - Crew Van 1015 kg - 2750 kg 125 kg 1010 1010 1010 1010 1010 1010 1010 10	2.5 5 mm 0 mm 5 mm 0 mm 1660 mm 0 mm 1660 mm 1350 mm 1260 mm 14426 L 2.5 Van 2047 / 3160 kg 2062 / 3230 kg Van 5160 kg 4730 kg Van 1113 kg 1098 kg 2.5 2000 / 750 1500 / 750 1500 / 750 1500 / 68	Crew Van 1585 mm 1620 mm 1350 mm 1260 mm 2511 L CRDi Crew Van 2107 / 3160 k 2122 / 3230 k Crew Van 5160 kg 4731 kg Crew Van 1123 kg 1108 kg CRDi kg (Manual) 0 kg (Auto) 0 kg (Auto) 0 kg 125 kg 11/Auto / 8.8	

uspension	2.4 Petrol	2.5 CRDi
ront	MacPherson Struts and gas-filled shoc	
gear .	Leaf springs with gas-filled shock absorbers	
Vheels and Tyres	absorbers Van	Crew Van
6" x 6.5J steel wheels	•	•
215/70 R16 tyres	•	•
Full size spare wheel	•	•
Seat Configuration	Van	Crew Van
3 seater	•	_
6 seater	_	•
Active Safety	Van	Crew Van
4-channel, 4 sensor Anti-skid Braking System (ABS) and Electronic Brakeforce Distribution (EBD) Electronic Stability Control (ESC) with Traction Control System (TCS) (Available on	•	•
Diesel only)	٥	۰
Passive Safety	Van	Crew Van
Airbags		
Driver and front passenger SRS airbags	•	•
Body Auto uplack on impact	_	_
Auto unlock on impact Child safety door locks on sliding doors	•	•
Child safety door locks on sliding doors	•	•
Four ring strengthened body with rigid cabin and crush zones front and rear	•	•
High-mounted stop light on rear tail gate	•	•
Impact absorbing bumpers	•	•
Partition panel with window and cargo intrusion bar	•	•
Semi-bonneted	•	•
Side impact intrusion bars in doors	•	•
Seatbelts		
3 point retractable seat belts with lap seat belts for centre passengers	•	•
Pretensioners, load limiters and height adjustable front seat belts (excludes centre seat)	•	•
Seating		
Head restraints with vertical adjustment (excludes front centre seat)	•	•
2 child seat anchorage point – Outboard positions only in rear seat	_	•
Security	Van	Crew Van
Central locking	•	•
Engine immobiliser	•	•
Keyless entry with burglar alarm	•	•
Multimedia System	Van	Crew Van
MP3 / WMA / CD player, AM/FM tuner	•	•
2 speakers	•	•
USB audio input with iPod® compatibility	•	•
Bluetooth® media streaming and Handsfree^	•	•
Auxiliary input jack (to connect external audio source)	•	•
Roof-mounted aerial	•	•
Steering wheel audio controls	•	•
Occupant Comfort	Van	Crew Van
5 speed intermittent, 3 stage wipe modes on front wipers with 3-way	•	•
Washer nozzle		
Battery saving automatic headlights off when ignition key removed	•	•
Cigarette lighter and ash tray	•	•
Day / night rear view mirror	•	•
Digital clock	•	•
Dual sliding doors	•	•
Dual tone horn	•	•
Electrically adjusted external mirrors	•	•
Fixed bench seat for rear passengers	_	•
Fold down centre armrest for front passengers (when centre seat not in use)	•	•
Height adjusting driver's seat cushion	•	•
Occupant assist grab handles for front passengers	•	•
Occupant assist grab handles for rear passengers	_	•
Pop-out latch type windows for rear passengers	_	•
Power windows for front passengers with driver one touch auto down function		•
Rear heated glass with timer		-
Tachometer	•	•
	•	•
Trip odometer	• Van	• Crew Van
Exterior Stuling		U EW Vall
Exterior Styling Black exterior door handles		
Exterior Styling Black exterior door handles Black bumpers	•	•

*Source: ADR81/02. Fuel consumption will vary depending on a combination of driving habits and the condition of the vehicle. iPod® is a registered trademark of Apple Inc., registered in the U.S. and other countries. Bluetooth® is a registered trademark of Bluetooth ® compatibility.

1. Only suitable for Bluetooth ® compatible phones. Bluetooth ® compatible phones. Bluetooth Bluetooth SlG, 'Please check your Bluetooth ® compatibility to ensure compatibility.

8. 750 kg unbraked – CRDi manual) S. Load capacity = 75kg evenly distributed across 2 bars with secure lock function 7. Park Assist Sensors are designed as driver assist function only and should not be used as a substitute for skilled driving and safe parking practice. While the Park Assist Sensors monitor objects on approach, there may be occasions where blind spots affect the sensitivity of the sensors and as a result the area into which the vehicle is heading must be visually monitored by the driver at all times while parking. Not compatible with Technician's Step.

• = Standa	rd — = Not availat	ole • = Optional
Interior Styling	Van	Crew Van
Aluminium effect on gear knob	•	•
Two tone interior	•	•
Woven cloth seats and front door trims	•	•
Interior Lighting	Van	Crew Van
Delayed fade-out front interior light	•	•
Door courtesy reflector on driver and passenger doors	•	•
Door courtesy lamp on sliding doors	_	•
Door courtesy reflector on rear of sliding doors	•	•
Green illuminated instrument cluster, dash audio and A/C controls Illuminated cigarette lighter surround and ash tray	•	•
Illuminated cigarette lighter surround and asir day	•	•
Interior light in centre	• _	•
Luggage lamp in cargo area	•	•
Interior Ventilation	Van	Crew Van
Air conditioning with pollen filter	•	•
Rotary-type air conditioning controls	•	•
Storage Solutions	Van	Crew Van
2 coat hooks		•
6 tie down hooks in cargo area	_	•
10 tie down hooks in cargo area	•	
Door pockets with bottle bulges in sliding door trims	_	•
Dual door pockets in front door trims	•	•
Dual glove box compartments	•	•
Retractable twin width-adjustable cup holders in centre dash fascia	•	•
Rubber-lined storage compartment on top of dashboard	•	<u>•</u>
Storage compartment and cup holders on back of fold down front centre seat Ticket holder in driver's sun visor	•	•
Twin swing tail gate	•	•
Vinyl floor covering in cargo area	•	•
Hyundai Genuine Accessories	Van	Crew Van
Technology		
Bluetooth Phone Kit ¹	0	0
Rear View Camera	0	-
DVD Entortainment Screen		_
DVD Entertainment Screen DVD Entertainment Mounting Bracket	0	-
		-
DVD Entertainment Mounting Bracket Interior Canvas Seat Covers	0	-
DVD Entertainment Mounting Bracket Interior Canvas Seat Covers Cargo Barrier ²	0	-
DVD Entertainment Mounting Bracket Interior Canvas Seat Covers	0	- - - - - 0
DVD Entertainment Mounting Bracket Interior Canvas Seat Covers Cargo Barrier ² Air Conditioning Curtain	0 0 0	- - - - 0
DVD Entertainment Mounting Bracket Interior Canvas Seat Covers Cargo Barrier ² Air Conditioning Curtain Tailored Carpet Floor Mats Tailored Rubber Floor Mats Dash Mat	0 0 0 0 0 0 0	0
DVD Entertainment Mounting Bracket Interior Canvas Seat Covers Cargo Barrier² Air Conditioning Curtain Tailored Carpet Floor Mats Tailored Rubber Floor Mats Dash Mat Rubber Cargo Mat	0 0 0 0 0 0 0 0 0	0 0
DVD Entertainment Mounting Bracket Interior Canvas Seat Covers Cargo Barrier ² Air Conditioning Curtain Tailored Carpet Floor Mats Tailored Rubber Floor Mats Dash Mat	0 0 0 0 0 0 0	0
DVD Entertainment Mounting Bracket Interior Canvas Seat Covers Cargo Barrier² Air Conditioning Curtain Tailored Carpet Floor Mats Tailored Rubber Floor Mats Dash Mat Rubber Cargo Mat Couriers' Wooden Floor	0 0 0 0 0 0	0 0 0
DVD Entertainment Mounting Bracket Interior Canvas Seat Covers Cargo Barrier² Air Conditioning Curtain Tailored Carpet Floor Mats Tailored Rubber Floor Mats Dash Mat Rubber Cargo Mat Couriers' Wooden Floor Portable Cooler – 12V, 15L³ Fabric Rear Bumper Protector Exterior	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0
DVD Entertainment Mounting Bracket Interior Canvas Seat Covers Cargo Barrier² Air Conditioning Curtain Tailored Carpet Floor Mats Tailored Rubber Floor Mats Dash Mat Rubber Cargo Mat Couriers' Wooden Floor Portable Cooler – 12V, 15L³ Fabric Rear Bumper Protector Exterior Alloy Nudge Bar (with Driving Light Mounting Brackets)	0 0 0 0 0 0 0	0 0 0 0 0 0 0
DVD Entertainment Mounting Bracket Interior Canvas Seat Covers Cargo Barrier² Air Conditioning Curtain Tailored Carpet Floor Mats Tailored Rubber Floor Mats Dash Mat Rubber Cargo Mat Couriers' Wooden Floor Portable Cooler – 12V, 15L³ Fabric Rear Bumper Protector Exterior	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0
DVD Entertainment Mounting Bracket Interior Canvas Seat Covers Cargo Barrier² Air Conditioning Curtain Tailored Carpet Floor Mats Tailored Rubber Floor Mats Dash Mat Rubber Cargo Mat Couriers' Wooden Floor Portable Cooler – 12V, 15L³ Fabric Rear Bumper Protector Exterior Alloy Nudge Bar (with Driving Light Mounting Brackets) Headlight Protectors (set of 2)	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0
Interior Canvas Seat Covers Cargo Barrier² Air Conditioning Curtain Tailored Carpet Floor Mats Tailored Rubber Floor Mats Dash Mat Rubber Cargo Mat Couriers' Wooden Floor Portable Cooler – 12V, 15L³ Fabric Rear Bumper Protector Exterior Alloy Nudge Bar (with Driving Light Mounting Brackets) Headlight Protectors (set of 2) Tinted Stylevisors (front pair only) Sliding door windows – fixed Rear panel window – fixed (left hand)	0 0 0 0 0 0 0 0 0	0 0 0 0 0 0
Interior Canvas Seat Covers Cargo Barrier² Air Conditioning Curtain Tailored Carpet Floor Mats Tailored Rubber Floor Mats Dash Mat Rubber Cargo Mat Couriers' Wooden Floor Portable Cooler – 12V, 15L³ Fabric Rear Bumper Protector Exterior Alloy Nudge Bar (with Driving Light Mounting Brackets) Headlight Protectors (set of 2) Tinted Stylevisors (front pair only) Sliding door windows – fixed Rear panel window – fixed (left hand) Towbar & Towball⁴		0 0 0 0 0 0
Interior Canvas Seat Covers Cargo Barrier² Air Conditioning Curtain Tailored Carpet Floor Mats Tailored Rubber Floor Mats Dash Mat Rubber Cargo Mat Couriers' Wooden Floor Portable Cooler – 12V, 15L³ Fabric Rear Bumper Protector Exterior Alloy Nudge Bar (with Driving Light Mounting Brackets) Headlight Protectors (set of 2) Tinted Stylevisors (front pair only) Sliding door windows – fixed Rear panel window – fixed (left hand)	0 0 0 0 0 0 0 0 0	0 0 0 0 0 0
Interior Canvas Seat Covers Cargo Barrier² Air Conditioning Curtain Tailored Carpet Floor Mats Tailored Rubber Floor Mats Dash Mat Rubber Cargo Mat Couriers' Wooden Floor Portable Cooler – 12V, 15L³ Fabric Rear Bumper Protector Exterior Alloy Tudge Bar (with Driving Light Mounting Brackets) Headlight Protectors (set of 2) Tinted Stylevisors (front pair only) Sliding door windows – fixed Rear panel window – fixed (left hand) Towbar & Towball⁴ Trailer Wiring Harness (Includes flat pin)		0 0 0 0 0 0 0
DVD Entertainment Mounting Bracket Interior Canvas Seat Covers Cargo Barrier² Air Conditioning Curtain Tailored Carpet Floor Mats Tailored Rubber Floor Mats Dash Mat Rubber Cargo Mat Couriers' Wooden Floor Portable Cooler – 12V, 15L³ Fabric Rear Bumper Protector Exterior Alloy Nudge Bar (with Driving Light Mounting Brackets) Headlight Protectors (set of 2) Tinted Stylevisors (front pair only) Sliding door windows – fixed Rear panel window – fixed (left hand) Towbar & Towball³ Trailer Wiring Harness (Includes flat pin) Rear Step with Corner Protector Technician Step with Grab Handles Grab Handles		0 0 0 0 0 0 0
Interior Canvas Seat Covers Cargo Barrier² Air Conditioning Curtain Tailored Carpet Floor Mats Tailored Rubber Floor Mats Dash Mat Rubber Cargo Mat Couriers' Wooden Floor Portable Cooler – 12V, 15L³ Fabric Rear Bumper Protector Exterior Alloy Nudge Bar (with Driving Light Mounting Brackets) Headlight Protectors (set of 2) Tinted Stylevisors (front pair only) Sliding door windows – fixed Rear panel window – fixed (left hand) Towbar & Towball⁴ Trailer Wiring Harness (Includes flat pin) Rear Step with Corner Protector Technician Step with Grab Handles Grab Handles Styling		0 0 0 0 0 0 0
DVD Entertainment Mounting Bracket Interior Canvas Seat Covers Cargo Barrier² Air Conditioning Curtain Tailored Carpet Floor Mats Tailored Rubber Floor Mats Dash Mat Rubber Cargo Mat Couriers' Wooden Floor Portable Cooler – 12V, 15L³ Fabric Rear Bumper Protector Exterior Alloy Nudge Bar (with Driving Light Mounting Brackets) Headlight Protectors (set of 2) Tinted Stylevisors (front pair only) Sliding door windows – fixed Rear panel window – fixed (left hand) Towbar & Towball³ Trailer Wiring Harness (Includes flat pin) Rear Step with Corner Protector Technician Step with Grab Handles Grab Handles		0 0 0 0 0 0 0 0
Interior Canvas Seat Covers Cargo Barrier² Air Conditioning Curtain Tailored Carpet Floor Mats Tailored Rubber Floor Mats Dash Mat Rubber Cargo Mat Couriers' Wooden Floor Portable Cooler – 12V, 15L³ Fabric Rear Bumper Protector Exterior Alloy Nudge Bar (with Driving Light Mounting Brackets) Headlight Protectors (set of 2) Tinted Stylevisors (front pair only) Sliding door windows – fixed Rear panel window – fixed (left hand) Towbar & Towball⁴ Trailer Wiring Harness (Includes flat pin) Rear Step with Corner Protector Technician Step with Grab Handles Grab Handles Styling 16* Chrome Alloy Wheels (sold singularly) Roof Racks and Lifestyle Industrial Roof Racks (2 bar set) load capacity = 100kg evenly distributed across 2		0 0 0 0 0 0 0 0
Interior Canvas Seat Covers Cargo Barrier² Air Conditioning Curtain Tailored Carpet Floor Mats Tailored Rubber Floor Mats Dash Mat Rubber Cargo Mat Couriers' Wooden Floor Portable Cooler – 12V, 15L³ Fabric Rear Bumper Protector Exterior Alloy Nudge Bar (with Driving Light Mounting Brackets) Headlight Protectors (set of 2) Tinted Stylevisors (front pair only) Sliding door windows – fixed Rear panel window – fixed (left hand) Towbar & Towball⁴ Trailer Wiring Harness (Includes flat pin) Rear Step with Corner Protector Technician Step with Grab Handles Grab Handles Styling 16° Chrome Alloy Wheels (sold singularly) Roof Racks and Lifestyle Industrial Roof Racks (2 bar set) load capacity = 100kg evenly distributed across 2 bars with secure lock function		0 0 0 0 0 0 0 0 0 0 0 0
Interior Canvas Seat Covers Cargo Barrier² Air Conditioning Curtain Tailored Carpet Floor Mats Tailored Rubber Floor Mats Dash Mat Rubber Cargo Mat Couriers' Wooden Floor Portable Cooler − 12V, 15L³ Fabric Rear Bumper Protector Exterior Alloy Nudge Bar (with Driving Light Mounting Brackets) Headlight Protectors (set of 2) Tinted Stylevisors (front pair only) Sliding door windows − fixed Rear panel window − fixed (left hand) Towbar & Towball⁴ Trailer Wiring Harness (Includes flat pin) Rear Step with Corner Protector Technician Step with Grab Handles Grab Handles Styling 16" Chrome Alloy Wheels (sold singularly) Roof Racks and Lifestyle Industrial Roof Racks (2 bar set) load capacity = 100kg evenly distributed across 2 bars with secure lock function Whispbar™ Quiet Roof Racks' Commercial Roof Racks (3 bar set) load capacity = 125kg evenly distributed across		
Interior Canvas Seat Covers Cargo Barrier² Air Conditioning Curtain Tailored Carpet Floor Mats Tailored Rubber Floor Mats Dash Mat Rubber Cargo Mat Couriers' Wooden Floor Portable Cooler − 12V, 15L³ Fabric Rear Bumper Protector Exterior Alloy Nudge Bar (with Driving Light Mounting Brackets) Headlight Protectors (set of 2) Tinted Stylevisors (front pair only) Sliding door windows − fixed Rear panel window − fixed (left hand) Towbar & Towball⁴ Trailer Wiring Harness (Includes flat pin) Rear Step with Corner Protector Technician Step with Grab Handles Grab Handles Styling 16" Chrome Alloy Wheels (sold singularly) Roof Racks and Lifestyle Industrial Roof Racks (2 bar set) load capacity = 100kg evenly distributed across 2 bars with secure lock function Whispbar™ Quiet Roof Racks³ Commercial Roof Racks (3 bar set) load capacity = 125kg evenly distributed across 3 bars with secure lock function		
Interior Canvas Seat Covers Cargo Barrier² Air Conditioning Curtain Tailored Carpet Floor Mats Tailored Rubber Floor Mats Tailored Rubber Floor Mats Dash Mat Rubber Cargo Mat Couriers' Wooden Floor Portable Cooler − 12V, 15L³ Fabric Rear Bumper Protector Exterior Alloy Nudge Bar (with Driving Light Mounting Brackets) Headlight Protectors (set of 2) Tinted Stylevisors (front pair only) Sliding door windows − fixed Rear panel window − fixed (left hand) Towbar & Towball⁴ Trailer Wiring Harness (Includes flat pin) Rear Step with Corner Protector Technician Step with Grab Handles Grab Handles Styling 16" Chrome Alloy Wheels (sold singularly) Roof Racks and Lifestyle Industrial Roof Racks (2 bar set) load capacity = 100kg evenly distributed across 2 bars with secure lock function Whispbar™ Quiet Roof Racks (3 bar set) load capacity = 125kg evenly distributed across 3 bars with secure lock function		
Interior Canvas Seat Covers Cargo Barrier² Air Conditioning Curtain Tailored Carpet Floor Mats Tailored Rubber Floor Mats Dash Mat Rubber Cargo Mat Couriers' Wooden Floor Portable Cooler − 12V, 15L³ Fabric Rear Bumper Protector Exterior Alloy Nudge Bar (with Driving Light Mounting Brackets) Headlight Protectors (set of 2) Tinted Stylevisors (front pair only) Sliding door windows − fixed Rear panel window − fixed (left hand) Towbar & Towball⁴ Trailer Wiring Harness (Includes flat pin) Rear Step with Corner Protector Technician Step with Grab Handles Grab Handles Styling 16° Chrome Alloy Wheels (sold singularly) Roof Racks and Lifestyle Industrial Roof Racks (2 bar set) load capacity = 100kg evenly distributed across 2 bars with secure lock function Whispbar™ Quiet Roof Racks Commercial Roof Racks (3 bar set) load capacity = 125kg evenly distributed across 3 bars with secure lock function Roof Racks 4th Bar. Load capacity = 125kg evenly distributed across 4 bars with secure lock function Roof Racks 4th Bar. Load capacity = 125kg evenly distributed across 4 bars with secure lock function Roof Racks 4th Bar. Load capacity = 125kg evenly distributed across 4 bars with secure lock function Roof Racks 4th Bar. Load capacity = 125kg evenly distributed across 4 bars with secure lock function Full Technician Kit - Includes Ladder Holders (6 pegs, 6 pads, 2 straps), Conduit		
Interior Canvas Seat Covers Cargo Barrier² Air Conditioning Curtain Tailored Carpet Floor Mats Tailored Rubber Floor Mats Tailored Rubber Floor Mats Dash Mat Rubber Cargo Mat Couriers' Wooden Floor Portable Cooler − 12V, 15L³ Fabric Rear Bumper Protector Exterior Alloy Nudge Bar (with Driving Light Mounting Brackets) Headlight Protectors (set of 2) Tinted Stylevisors (front pair only) Sliding door windows − fixed Rear panel window − fixed (left hand) Towbar & Towball⁴ Trailer Wiring Harness (Includes flat pin) Rear Step with Corner Protector Technician Step with Grab Handles Grab Handles Styling 16" Chrome Alloy Wheels (sold singularly) Roof Racks and Lifestyle Industrial Roof Racks (2 bar set) load capacity = 100kg evenly distributed across 2 bars with secure lock function Whispbar™ Quiet Roof Racks (3 bar set) load capacity = 125kg evenly distributed across 3 bars with secure lock function		
Interior Canvas Seat Covers Cargo Barrier² Air Conditioning Curtain Tailored Carpet Floor Mats Tailored Rubber Floor Mats Rubber Cargo Mat Couriers' Wooden Floor Portable Cooler – 12V, 15L³ Fabric Rear Bumper Protector Exterior Alloy Nudge Bar (with Driving Light Mounting Brackets) Headlight Protectors (set of 2) Tinted Stylevisors (front pair only) Sliding door windows – fixed Rear panel window – fixed (left hand) Towbar & Towball⁴ Trailer Wiring Harness (Includes flat pin) Rear Step with Corner Protector Technician Step with Grab Handles Grab Handles Styling 16° Chrome Alloy Wheels (sold singularly) Roof Racks and Lifestyle Industrial Roof Racks (2 bar set) load capacity = 100kg evenly distributed across 2 bars with secure lock function Whispbar™ Quiet Roof Racks³ Commercial Roof Racks (3 bar set) load capacity = 125kg evenly distributed across 3 bars with secure lock function Roof Racks 4th Bar. Load capacity = 125kg evenly distributed across 4 bars with secure lock function Full Technician Kit – Includes Ladder Holders (6 pegs, 6 pads, 2 straps), Conduit Holder, key locking security cables & worklight mount. ⁶		
Interior Canvas Seat Covers Cargo Barrier² Air Conditioning Curtain Tailored Carpet Floor Mats Tailored Rubber Floor Mats Dash Mat Rubber Cargo Mat Couriers' Wooden Floor Portable Cooler − 12V, 15L³ Fabric Rear Bumper Protector Exterior Alloy Nudge Bar (with Driving Light Mounting Brackets) Headlight Protectors (set of 2) Tinted Stylevisors (front pair only) Sliding door windows − fixed Rear panel window − fixed (left hand) Towbar & Towball⁴ Trailer Wiring Harness (Includes flat pin) Rear Step with Corner Protector Technician Step with Grab Handles Grab Handles Styling 16" Chrome Alloy Wheels (sold singularly) Roof Racks and Lifestyle Industrial Roof Racks (2 bar set) load capacity = 100kg evenly distributed across 2 bars with secure lock function Whispbar™ Quiet Roof Racks' Commercial Roof Racks (3 bar set) load capacity = 125kg evenly distributed across 3 bars with secure lock function Roof Racks 4th Bar. Load capacity = 125kg evenly distributed across 4 bars with secure lock function Roof Racks 4th Bar. Load capacity = 125kg evenly distributed across 4 bars with secure lock function Roof Racks 4th Bar. Load capacity = 125kg evenly distributed across 4 bars with secure lock function Roof Racks 4th Bar. Load capacity = 125kg evenly distributed across 4 bars with secure lock function Full Technician Kit − Includes Ladder Holders (6 pegs, 6 pads, 2 straps), Conduit Holder, key locking security cables & worklight mount.6 Roof Mounted Bike Carrier Roof Mounted Bike Carrier		
Interior Canvas Seat Covers Cargo Barrier³ Air Conditioning Curtain Tailored Carpet Floor Mats Tailored Rubber Floor Mats Dash Mat Rubber Cargo Mat Couriers' Wooden Floor Portable Cooler − 12V, 15L³ Fabric Rear Bumper Protector Exterior Alloy Nudge Bar (with Driving Light Mounting Brackets) Headlight Protectors (set of 2) Tinted Stylevisors (front pair only) Sliding door windows − fixed Rear panel window − fixed (left hand) Towbar & Towball⁴ Trailer Wiring Harness (Includes flat pin) Rear Step with Corner Protector Technician Step with Grab Handles Grab Handles Styling 16° Chrome Alloy Wheels (sold singularly) Roof Racks and Lifestyle Industrial Roof Racks (2 bar set) load capacity = 100kg evenly distributed across 2 bars with secure lock function Whispbar™ Quiet Roof Racks? Commercial Roof Racks (3 bar set) load capacity = 125kg evenly distributed across 3 bars with secure lock function Roof Racks 4th Bar. Load capacity = 125kg evenly distributed across 4 bars with secure lock function Full Technician Kit − Includes Ladder Holders (6 pegs, 6 pads, 2 straps), Conduit Holder, key locking security cables & worklight mount. ⁶ Roof Mounted Bike Carrier Roof Mounted Kayak Holder Ski & Snowboard Carrier		
Interior Canvas Seat Covers Cargo Barrier² Air Conditioning Curtain Tailored Carpet Floor Mats Tailored Rubber Floor Mats Dash Mat Rubber Cargo Mat Couriers' Wooden Floor Portable Cooler − 12V, 15L³ Fabric Rear Bumper Protector Exterior Alloy Nudge Bar (with Driving Light Mounting Brackets) Headlight Protectors (set of 2) Tinted Stylevisors (front pair only) Sliding door windows − fixed Rear panel window − fixed (left hand) Towbar & Towball⁴ Trailer Wiring Harness (Includes flat pin) Rear Step with Corner Protector Technician Step with Grab Handles Grab Handles Styling 16" Chrome Alloy Wheels (sold singularly) Roof Racks and Lifestyle Industrial Roof Racks (2 bar set) load capacity = 100kg evenly distributed across 2 bars with secure lock function Whispbar™ Quiet Roof Racks' Commercial Roof Racks (3 bar set) load capacity = 125kg evenly distributed across 3 bars with secure lock function Roof Racks 4th Bar. Load capacity = 125kg evenly distributed across 4 bars with secure lock function Roof Racks 4th Bar. Load capacity = 125kg evenly distributed across 4 bars with secure lock function Roof Racks 4th Bar. Load capacity = 125kg evenly distributed across 4 bars with secure lock function Roof Racks 4th Bar. Load capacity = 125kg evenly distributed across 4 bars with secure lock function Full Technician Kit − Includes Ladder Holders (6 pegs, 6 pads, 2 straps), Conduit Holder, key locking security cables & worklight mount.6 Roof Mounted Bike Carrier Roof Mounted Bike Carrier		

HYUNDAI GENUINE ACCESSORIES

While the iLoad offers a comprehensive range of quality inclusions, you can further enhance your driving pleasure and ownership pride by choosing from a wide range of Hyundai Genuine Accessories that reflect your personality and add extra ease and enjoyment to your lifestyle pursuits.


Importantly, Hyundai Genuine Accessories are an astute way to help keep your new iLoad in original showroom condition and further enhance its already high levels of built-in occupant safety.



Cargo Barrier (60kg rating)



Tailored Rubber Floor Mats



Rubber Cargo Mat



Sliding Door Windows



16" Alloy Wheels (sold singularly)



Tinted Stylevisors (front pair only)



Towbar, Towball & Trailer Wiring Harness¹



Rear Step with Corner Protectors²



Rear Park Assist (4 head)³



Courier's Wooden Floor



Technician Step (Towbar compatible)²



Full Technician Kit

Some images featured are included for illustration purposes only.

1. Maximum ball download 150kg. Towing capacity = 2000kg braked & 750kg unbraked. Towbar capacity subject to regulatory requirements, Towbar design, vehicle design and towing equipment limitations.

2. Requires Towbar installation. 3. Park Assist Sensors are designed as driver assist function only and should not be used as a substitute for skilled driving and safe parking practice. While the Park Assist sensors monitor objects on approach, there may be occasions where blind spots affect the sensitivity of the sensors and as a result the area into which the vehicle is heading must be visually monitored by the driver at all times while parking. Not compatible with Technician's step.












iLoad 3 seat 2.4 litre petrol van featured above in Ceramic White.

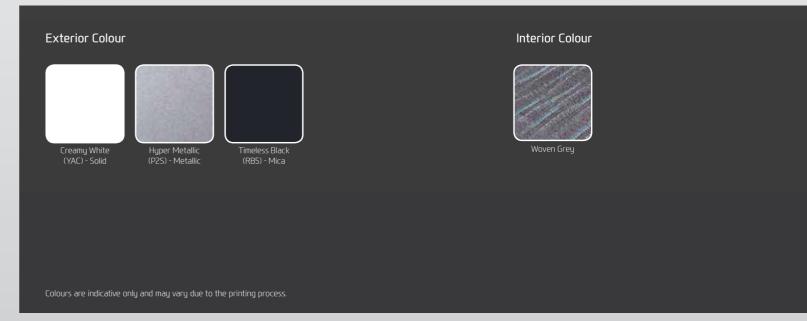

Hyundai Motor Company Australia Pty Ltd Corner of 394 Lane Cove Road & Hyundai Drive, Macquarie Park NSW 2113 T.02 8873 6000 F.02 8873 6005

Hyundai Motor Company (HMC) and the Hyundai Motor Company Australia (HMCA) each reserve the right to alter vehicle specifications and equipment levels without notice. To the extent permitted by the law, neither HMC nor HMCA shall be liable to any person as a result of reliance on the content of this spec sheet. Please consult your Hyundai dealer for the latest specifications, equipment levels, options, prices, colours and vehicle availability. Metallic and mica paint are optional extras. Note: Information in this spec sheet is current as at 19/10/2012. Part No: TQL1012S HMCA5320

