



FM•HR



1 9 9 9

SPECIFICATIONS

Weight (lbs.)

Max GVWR	30,000
Front	10,640
Rear	20,080
Body/Payload	Up to 20,620

Dimensions (in.)

Wheelbase	181.9 (MT only) 200.0/218.5/239.4 (MT/AT)
Usable cab to rear axle	146.6/164.7/183.2/203.7
Overall length (End of frame)	313.8/340.6/368.1/409.5

Engine

Model	Mitsubishi 6D16-2AT3
Type	4-stroke cycle, watercooled, direct injection, turbocharged, intercooled diesel
No. of cylinders	Six in-line
Piston displacement	460.3 cu. in. (7.5 liters)
Max. output (SAE, gross)	200 hp/2,600 rpm
Max. torque (SAE, gross)	434 lb.ft./1,600 rpm
Air cleaner	Dry paper element with snorkel and rain cap
Starter	12-volt
Alternator	12-volt, 80-amp

Chassis

Clutch	Hydraulic control, coil spring 13.8 in. single cerametallic disc
Transmission (Automatic option)	6 forward and 1 reverse speed, 2nd to 6th synchromesh, 1st and reverse constant mesh gears
Ratio: 6-speed OID	6.875/4.189/2.460/1.542/1.000/0.786, reverse 6.875
Ratio: automatic	(Allison AT545) 3.454/2.253/1.407/1.000, reverse 5.571
Axle	Front Reverse Elliot, I-beam-type, 10,640 lbs. capacity
Rear	Full-floating-type, 20,080 lbs. capacity
Final reduction gear	Single-reduction hypoid gear
Ratio	6.166 (MT) 5.571 (AT)
Tires	Single front, dual traction rear
Size	Premium 11R22.5 (14PR)
Steering	Ball-nut-type with integral-type hydraulic power booster. Telescopic and tilt steering column with steering lock
Suspension	Front Laminated leaf springs with shock absorbers
Rear	Laminated leaf springs
Brakes	Service Air-over hydraulic, self-adjusting with anti-lock air dryer standard (exhaust brake standard except automatic)
Parking	Internal expanding-type on propeller shaft
Fuel tank	50-gallon tank and fuel/water separator (standard)
Electrical system	Two 12-volt, maintenance-free batteries
Cab	Tilt cab



FM•HR


MITSUBISHI FUSO TRUCK
OF AMERICA, Inc.
P.O. Box 464
100 Center Square Road
Bridgeport, NJ 08014

For the dealer nearest you,
or for more information, write
or call: 1 (800) 648-3876

Or visit our web site at
<http://www.mitfuso.com>

Vehicle specifications are subject to change
without notice. Photos and descriptions included
in this brochure may vary in comparison to
actual vehicle models.

♻️ PRINTED IN THE U.S.A. ON RECYCLED AND
RECYCLABLE PAPER 4/98. ©1998 MITSUBISHI FUSO
TRUCK OF AMERICA, INC.

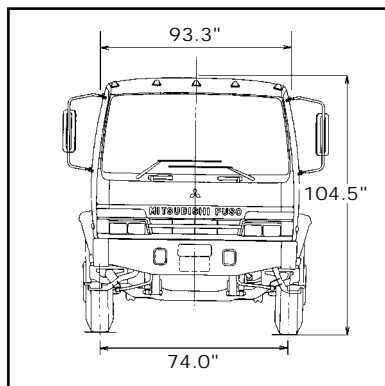

- A. Wheelbase (in.)
181.9 (MT only) 200.0/218.5/239.4 (MT/AT)
- B. Usable cab to rear axle (in.)
146.6/164.7/183.2/203.7
- C. Overall length (in.)
313.8/340.6/368.1/409.5

