



# FM·SP



2 0 0 0

## SPECIFICATIONS

### Weight (lbs.)

Max. GVWR	32,900
Front	11,700
Rear	21,200
Body/Payload	Up to 22,725

### Dimensions (in.)

Wheelbase	181.9/200.0/218.5/239.4
Usable cab to rear axle	146.6/164.7/183.2/203.7
Overall length (End of frame)	313.8/340.6/368.1/409.5

### Engine

Model	Mitsubishi 6D16-3AT2
Type	4-stroke cycle, watercooled, direct injection, turbocharged, intercooled diesel
No. of cylinders	Six in-line
Piston displacement	460.3 cu. in. (7.5 liters)
Max. output (SAE, gross)	230 hp/2,600 rpm
Max. torque (SAE, gross)	521 lb.ft./1,600 rpm
Air cleaner	Dry paper element with snorkel and rain cap
Starter	12-volt
Alternator	12-volt, 100-amp

### Chassis

Clutch	Hydraulic control, coil spring 15.0 in., single cerametallic disc
Transmission	6 forward and 1 reverse speed, 2nd to 6th synchromesh, 1st and reverse constant mesh gears (10-speed optional)
Ratio: 6-speed	8.064/5.443/3.064/1.824/1.321/1.000, reverse 7.354
Ratio: 10-speed	(10.060/7.767) (5.894/4.551) (3.466/2.676) (2.055/1.587)(1.295/1.000) reverse (10.002/7.722)
Axle	Front Reverse Elliot, I-beam-type, 11,905 lbs. capacity
Rear	Full-floating-type, 22,485 lbs. capacity
Final reduction gear	Single-reduction hypoid gear
Ratio	4.625 (6 and 10 speed)
Tires	Single front, dual rear traction
Size	Premium 11R22.5 (14PR)
Steering	Ball-nut-type with integral-type hydraulic power booster. Telescopic and tilt steering column with steering lock
Suspension	Front Laminated leaf springs with shock absorbers
Rear	Laminated leaf springs
Spring capacity	Front 11,900
Brakes	Service Full air, air dryer standard, auto slack adjusters with anti-lock (exhaust brake standard)
Parking	Spring-loaded-type on rear wheels
Fuel tank	50-gallon tank and fuel/water separator (standard)
Electrical system	Two 12-volt, maintenance-free batteries
Vehicle safety	Energy-absorbing steering wheel, crush bars in doors, daytime running lights and ABS standard



# FM·SP


MITSUBISHI FUSO TRUCK  
OF AMERICA, Inc.  
P.O. Box 464  
100 Center Square Road  
Bridgeport, NJ 08014

For the dealer nearest you,  
or for more information, write  
or call: 1 (800) 648-3876

Or visit our web site at  
<http://www.mitfuso.com>

Vehicle specifications are subject to change  
without notice. Photos and descriptions included  
in this brochure may vary in comparison to  
actual vehicle models.

♻️ PRINTED IN THE U.S.A. ON RECYCLED AND  
RECYCLABLE PAPER 7/99. ©1999 MITSUBISHI FUSO  
TRUCK OF AMERICA, Inc.

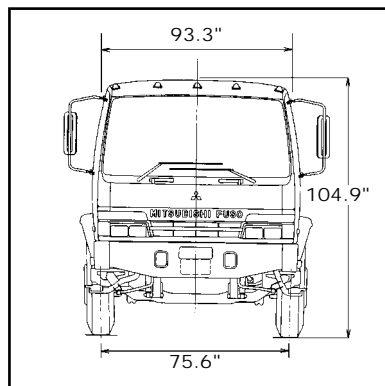

- A. Wheelbase (in.)  
181.9/200.0/218.5/239.4
- B. Usable cab to rear axle (in.)  
146.6/164.7/183.2/203.7
- C. Overall length (in.)  
313.8/340.6/368.1/409.5

