

Concrete Mixer



2 0 0 1

Cab Chassis	FE•SP	FM•MR
Wheelbase (inch)	108.3	144.9
Overall Length (inch)	215.6	269.3
Overall Width (inch)	80.7	97.6
Overall Height (inch)	102.0	134.1
GVWR (lbs.)	14,500	25,995

Drum	Direct drive with double spiral blades	
Drum Volume (cu. yd.)	2.5	5.8
Agitating Capacity (cu. yd.)	1.5	3.1
Mixing Capacity (cu. yd.)	1.5	3.1
Drum Revolution Speed		
Agitating (rpm)	2-4	1.5
Charging (rpm)	0-15	0-15
Discharge (rpm)	0-15	0-15
Mixing (rpm)	8-12	8-12

Hopper		
Hopper Openings (inch)	width 24.8 x length 33.3	width 30.3 x length 37.8

Chute		
Length, Main Chute (inch)	44.7	60.2
Length, Sub-chute (inch)	19.7	27.6
Water Tank Capacity (gal.)	52.8	71.3
Water Pump	Centrifugal pump	Centrifugal pump
Capacity (gal. per minute)	8	8

Oil Pump	Axial plunger pump
----------	--------------------



Oil Motor	Axial plunger-type with gear reducer
-----------	--------------------------------------

Standard Equipment
Pistol nozzle with hose, working lamp, warning buzzer for water pump, large water tank, tool box
The mixer body was manufactured and equipped by Kyokuto.



Concrete Mixer

FE•SP

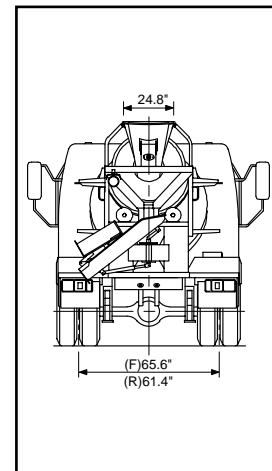
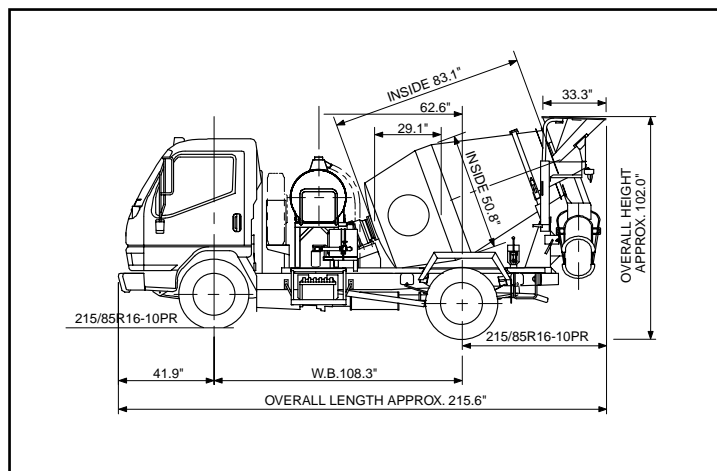


MITSUBISHI FUSO TRUCK
OF AMERICA, Inc.
P.O. Box 464
100 Center Square Road
Bridgeport, NJ 08014

For the dealer nearest you,
or for more information,
call: 877-202-9650

Or visit our web site at:
www.mitfuso.com

FM•MR

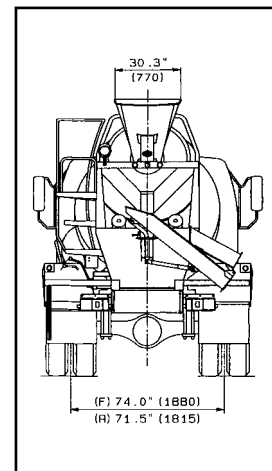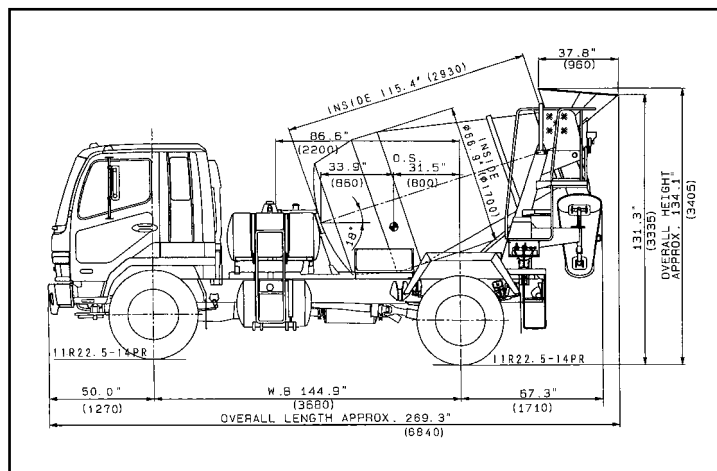

Vehicle specifications are subject to change
without notice. Photos and descriptions included
in this brochure may vary in comparison to
actual vehicle models.

♻️ PRINTED IN THE U.S.A. ON RECYCLED AND
RECYCLABLE PAPER 6/00. ©2000 MITSUBISHI FUSO
TRUCK OF AMERICA, Inc.