

S P E C I F I C A T I O N S

Weight (lbs.)

Height (1831)			
Max. GVWR		14,050	
	Front	5,290	
	Rear	9,480	
Body/Payload		Up to 8,925*	

Dimensions (in.)

Wheelbase	108.3/131.9/148.0			
Usable cab to rear axle	83.1/106.7/122.9			
Overall length (End of frame)	192.3/215.7/232.1			

Engine

Engine		
Model	Mitsubishi 4D34-3AT3B	
Туре	4-stroke cycle, watercooled, direct injection, turbocharged, intercooled diesel	
No. of cylinders	Four in-line	
Piston displacement	238.0 cu. in. (3.9 liters)	_
Max. output (SAE, gross)	145 hp@2,900 rpm	_
Max. torque (SAE, gross)	275 lb.ft.@1,600 rpm	_
Air cleaner	Dry paper element with snorkel and rain cap	_
Starter	12-volt	_
Alternator	12-volt, 100-amp	_

Chassis


Chassis		
Clutch		Hydraulic control, 11.8 in., single dry plate
Transmission (Automatic optional)		5 forward and 1 reverse speed, 2nd to 5th synchromesh, 1st and reverse constant mesh gears
	Ratio: manual	5.380/3.028/1.700/1.009/0.722, reverse 5.380
	Ratio: automatic	3.018/1.548/1.000/0.703, reverse 2.678
Axle	Front	Reverse Elliot, I-beam-type, 5,290 lbs. capacity
	Rear	Full-floating-type, 9,480 lbs. capacity
Final reduction gear		Single-reduction hypoid gear
	Ratio	5.714 (manual/automatic)
Tires (Premium)		Single front, dual rear
	Size	LT215/85R16E (10 PR)
Steering		Ball-nut-type with integral-type hydraulic power booster. Telescopic and tilt steering column with steering lock
Suspension	Front	Heavy-duty laminated leaf springs with shock absorbers and stabilizer bar
	Rear	Heavy-duty laminated leaf springs with shock absorbers and stabilizer bar
Brakes	Service	Hydraulic with vacuum servo assist, ABS dual-caliper four-wheel disc brakes with exhaust brake
	Parking	Internal expanding shoe-type
Fuel tank		33 gallons
Electrical system		Two 12-volt, maintenance-free batteries
Vehicle safety		Energy-absorbing steering wheel, crush bars in doors, daytime running lights and ABS standard

*Weight approximate. See dealer for complete details.



FE-HD SPECIFICATIONS







A. Wheelbase (in.) 108.3/131.9/148.0

B. Usable cab to rear axle (in.) 83.1/106.7/122.9

C. Overall length (in.) 192.3/215.7/232.1

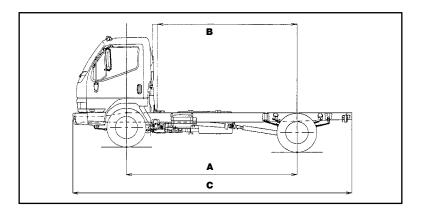



2004

MITSUBISHI FUSO TRUCK OF AMERICA, Inc. 2015 Center Square Road Logan Twp., NJ 08085

For the dealer nearest you, or for more information, call: **877-202-9650**

Or visit our web site at: www.mitfuso.com

Vehicle specifications are subject to change without notice. Photos and descriptions included on this spec sheet may vary in comparison to actual vehicle models.

 PRINTED IN THE U.S.A. ON RECYCLED AND RECYCLABLE PAPER 7/03. ©2003 MITSUBISHI FUSO TRUCK OF AMERICA, Inc.