


FORD D SERIES TRUCKS


SPECIFICATIONS & EQUIPMENT

D300

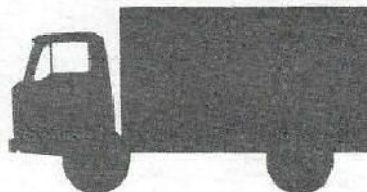

G.V.W. 13400 lb.

G.C.W. 19000 lb.

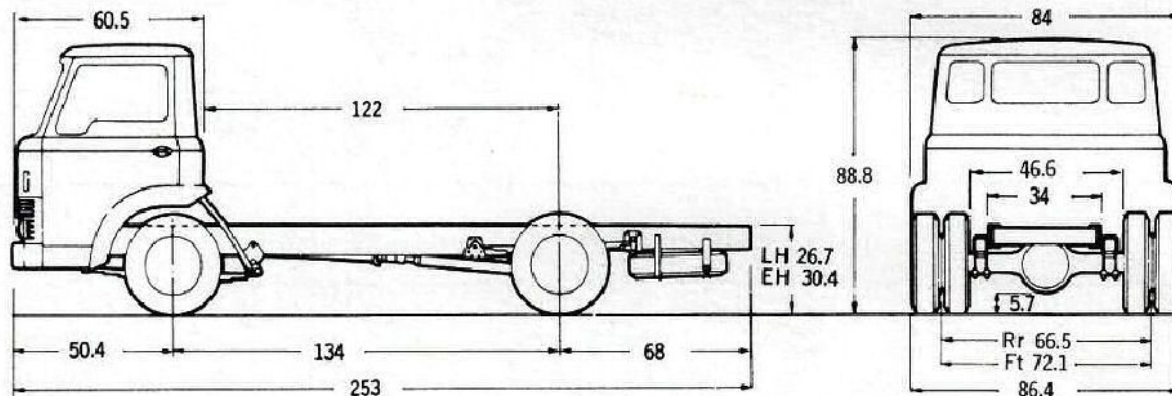

ALL DIMENSIONS IN INCHES

WHEELBASE	APPROXIMATE KERB WEIGHT			PAYLOAD, EQUIPMENT, ETC.
134"	FRONT 3402 lb.	REAR 1673 lb.	TOTAL 5075 lb.	8325 lb.

STANDARD EQUIPMENT

ENGINE: 6 cyl. Petrol O.H.V. 240 CID
 Displacement 240 cu. in.
 Compression Ratio 8.75 to 1
 Max. Gross H.P. @ rpm. 150 @ 4000
 Max. Net H.P. @ rpm. 129 @ 4000
 Max. Gross Torque lbs.-ft. @ rpm. 234 @ 2200
 Max. Net Torque lbs.-ft. @ rpm. 218 @ 2000
 Carburettor Single-Venturi
 Air Cleaner Fram paper element
 Oil Filter Full Flow, Replaceable Element

ALTERNATOR: 35 amp. Email Prestolite

AXLE, FRONT: Solid I-Beam
 Capacity 5500 lb.

AXLE, REAR: Ford 13A Spiral bevel, Single Speed
 Capacity 13,000 lb.
 Ratio 5.29 to 1

BATTERY: 12 volt — 57 Amp., 9 plate

BRAKES, SERVICE: Girling Hydraulic
 Total Lining Area 348.96 sq. in.
 Vacuum Booster Hydrovac 7.75" dia. Servo

BRAKES, PARKING:
 Mechanical by rod & cable to rear wheels, Multi-pull
 Total Lining Area 199.2 sq. in.

CAB: Tilt Cab

CLUTCH: Diameter 11" dia.
 Frictional Area 124 sq. in.

COOLING SYSTEM: Capacity — 41 pts.
 Fan 4 blade — 18" dia.

FRAME: Sect. Modulus 6.69

FUEL TANK: 20 Imp. Gallons

SHOCK ABSORBERS:
 Front Double Action Telescopic

SPRINGS, FRONT:

Capacity @ Pad 2250 lb.
Size — No. of Leaves 48" x 2.50" — 10

SPRINGS, REAR:

Capacity @ Pad 4300 lb.
Size — No. of Leaves 52" x 3.0" — 10

STEERING:

..... Bishop 300Q Worm & Peg
Ratio 24 to 1
Steering Wheel Diam. 19.81"

TRANSMISSION:

..... 4-speed

TYRES:

Front 8.25 x 16 — 8 ply
Dual Rear 8.25 x 16 — 8 ply

WHEELS:

..... Disc
No. and Size 7 — 16.0" dia.
Rim Size 6.5H
No. of Studs 6
Bolt Circle 8.08

ADDITIONAL STANDARD EQUIPMENT:

Dual Electric Windshield Wipers
Locking Door Handles, Dome Light
Instruments: Speedometer, Mileage Recorder, Oil Pressure,
Alternator & Main Beam Warning Lights, Fuel &
Temperature Gauges.
Interior Sun Visors
Two Rear Vision Mirrors (Std. Type)
Windshield Washers.

OPTIONAL EQUIPMENT

ENGINE:

Compression Ratio 7.0 to 1

AIR CLEANER:

..... 8" Donaldson Cyclopak

CAB:

..... Chassis Cowl

TYRES:

..... Spare Tyre & Tube
..... 8.25 x 16 — 8 ply